
# SANDWICH UNIT REFRIGERATOR

Model: SW60-18M-FB

60" Mighty Top Sandwich Unit Refrigerator with Solid Doors - 18 Pans Front Breathing

Stainless steel front and top, aluminum end panels, case back and interior. Certified under NSF-7 to maintain temperatures in 86°F ambient and designed to maintain NSF-7 temperatures in 100°F ambient.

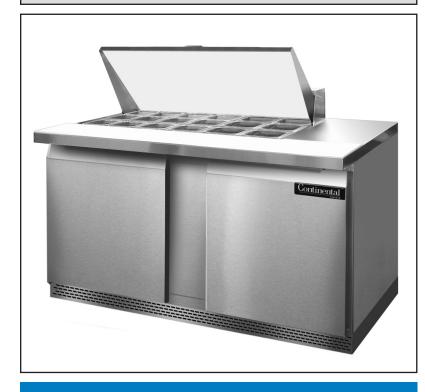

### **Options and Accessories**

(upcharge and lead times may apply)

Stainless steel exterior and interior - SS models	Expansion valve system
Stainless steel end panels - SA models	Rear-mounted cutting board
Glass doors in lieu of solid doors - GD models	Flat insulated night cover
Stainless steel finished back in lieu of aluminum	Remote models
Drawers in lieu of doors	Door locks
Overshelves (single or double)	Adjustable legs
Stainless steel shelves	Digital thermometer
Additional epoxy-coated steel shelves	Crumb catcher
Automatic, electric condensate evaporator	

Consult factory for other model configurations, options and accessories.



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Project Name:	
Model Specified:	
Location:	

AIA #: SIS #:

Quantity:

### **Standard Model Features**

### **REFRIGERATION SYSTEM**

Item No:

Performance-rated refrigeration system

Environmentally-safe R-134a refrigerant

Unique air flow distribution allows pan product to maintain 33° - 41°F

Automatic, energy saving, non-electric condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Easily serviceable, back mounted compressor

### **CABINET ARCHITECTURE**

2" non-CFC polyurethane foam insulation

Spring loaded, self closing doors

Magnetic snap-in door gaskets

Heavy-duty, epoxy-coated steel shelves

10" deep, full length nylon cutting board

Insulated lid

3 5/8" casters

Completely enclosed, vented and removable case back

## **MODEL FEATURES**

(18) 1/6 size non-recessed pans, 4" deep

Interior hanging thermometer

Field rehingeable doors

Front breathers are a unique, field assembled, bottom mounted ventilation system designed to allow cabinets to be flush against a wall or built into a counter to conserve space.

APPROVAL:

<b>Model S</b>	neci	ficat	inne
Model	heen	IIvat	IUIIO

DIMENSIONAL DATA	
Net Capacity (cu. ft.)	17.0 (481 cu I)
1/6 Size Pans (4" deep)	18
Width, Overall (in.)	60 (1524 mm)
Depth, Overall (in.) (incl. handles & bumpers)	35 (889 mm)

Depth, Body Only (less doors) (in.) 27 1/2 (699 mm) Depth, Cutting Board (in.) 10 (254 mm)

Height, Overall (in.) 40 7/8 (1038 mm)

(incl. 3 5/8" casters) Shelf Area (sq. ft.) 8.1 (.8 sq m)

No. of Shelves 2

Interior Depth (in.) 19 3/8 (492 mm)

2

26 1/4 (667 mm) Interior Height (in.)

56 (1422 mm) Interior Width (in.)

## **REFRIGERANT DATA**

No. of Doors

Condensing Unit Size (H.P.) 1/4 Capacity (BTU/Hr)\* 1940

### **ELECTRICAL DATA**

Voltage (int'l)	115/60/1 (220/50/1)
Fans	3
Total Amps (int'l)	6.6 (4.4)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

### **SHIPPING DATA**

Weight (lbs.)	322 (146 kg)
Height - Crated (in.)	43 1/4 (1099 mm)
Width - Crated (in.)	68 1/4 (1734 mm)
Depth - Crated (in.)	46 (1168 mm)

<sup>\*</sup> Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest



Equipped with one NEMA-5-15P Plug (varies by country)

Refrigerator

**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.







 $\@$  Copyright 2014. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

### **Model Plan Views**

