SANDWICH UNIT REFRIGERATOR

Model: SW60-18M

60" Mighty Top Sandwich Unit Refrigerator with Solid Doors - 18 Pans

Stainless steel front and top, aluminum end panels, case back and interior. Certified under NSF-7 to maintain temperatures in 86°F ambient and designed to maintain NSF-7 temperatures in 100°F ambient.



Options and Accessories

(upcharge and lead times may apply)

Stainless steel exterior and interior - SS models	Expansion valve system
Stainless steel end panels - SA models	Rear-mounted cutting board
Glass doors in lieu of solid doors - GD models	Flat insulated night cover
Stainless steel finished back in lieu of aluminum	Remote models
Drawers in lieu of doors	Door locks
Overshelves (single or double)	Adjustable legs
Stainless steel shelves	Digital thermometer
Additional epoxy-coated steel shelves	Crumb catcher
Automatic, electric condensate evaporator	

Consult factory for other model configurations, options and accessories.

Continental Refrigerator

Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com **Project Name:**

Model Specified:

Location:

Item No: Quantity:

AIA #: SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Performance-rated refrigeration system

Environmentally-safe R-134a refrigerant

Unique air flow distribution allows pan product to maintain 33° - 41°F

Automatic, energy saving, non-electric condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Easily serviceable, back mounted compressor

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation

Spring loaded, self closing doors

Magnetic snap-in door gaskets

Heavy-duty, epoxy-coated steel shelves

10" deep, full length nylon cutting board

Insulated lid

5" casters

Completely enclosed, vented and removable case back

MODEL FEATURES

(18) 1/6 size non-recessed pans, 4" deep

Interior hanging thermometer

Field rehingeable doors

APPROVAL:

Model Specifications

DIMENSIONAL DATA Net Capacity (cu. ft.) 17.0 (481 cu l) 1/6 Size Pans (4" deep) 18 Width, Overall (in.) 60 (1524 mm) Depth, Overall (in.) 35 (889 mm) Incl. handles & bumpers) 27 1/2 (699 mm) Depth, Body Only (less doors) (in.) 27 1/2 (699 mm) Depth, Cutting Board (in.) 10 (254 mm) Height, Overall (in.) 42 1/4 (1073 mm) Shelf Area (sq. ft.) 8.1 (.8 sq m) No. of Shelves 2 No. of Doors 2 Interior Depth (in.) 19 3/8 (492 mm) Interior Height (in.) 26 1/4 (667 mm) Interior Width (in.) 56 (1422 mm) REFRIGERANT DATA Condensing Unit Size (H.P.) 1/4 Capacity (BTU/Hr)* 1940 ELECTRICAL DATA Voltage (int'l) 115/60/1 (220/50/1) Fans 3		
1/6 Size Pans (4" deep) 18 Width, Overall (in.) 60 (1524 mm) Depth, Overall (in.) 35 (889 mm) (incl. handles & bumpers) 27 1/2 (699 mm) Depth, Body Only (less doors) (in.) 10 (254 mm) Depth, Cutting Board (in.) 42 1/4 (1073 mm) Height, Overall (in.) 8.1 (.8 sq m) Shelf Area (sq. ft.) 8.1 (.8 sq m) No. of Shelves 2 No. of Doors 2 Interior Depth (in.) 19 3/8 (492 mm) Interior Height (in.) 26 1/4 (667 mm) Interior Width (in.) 56 (1422 mm) REFRIGERANT DATA Condensing Unit Size (H.P.) 1/4 Capacity (BTU/Hr)* 1940 ELECTRICAL DATA Voltage (int'l) 115/60/1 (220/50/1)	DIMENSIONAL DATA	
Width, Overall (in.) 60 (1524 mm) Depth, Overall (in.) 35 (889 mm) (incl. handles & bumpers) 27 1/2 (699 mm) Depth, Body Only (less doors) (in.) 27 1/2 (699 mm) Depth, Cutting Board (in.) 10 (254 mm) Height, Overall (in.) 42 1/4 (1073 mm) (incl. 5" casters) 8.1 (.8 sq m) No. of Shelves 2 No. of Doors 2 Interior Depth (in.) 19 3/8 (492 mm) Interior Height (in.) 26 1/4 (667 mm) Interior Width (in.) 56 (1422 mm) REFRIGERANT DATA Condensing Unit Size (H.P.) 1/4 Capacity (BTU/Hr)* 1940 ELECTRICAL DATA Voltage (int'l) 115/60/1 (220/50/1)	Net Capacity (cu. ft.)	17.0 (481 cu l)
Depth, Overall (in.) (incl. handles & bumpers) Depth, Body Only (less doors) (in.) 27 1/2 (699 mm) Depth, Cutting Board (in.) 10 (254 mm) Height, Overall (in.) 42 1/4 (1073 mm) (incl. 5" casters) 8.1 (.8 sq m) No. of Shelves 2 No. of Doors 2 Interior Depth (in.) 19 3/8 (492 mm) Interior Height (in.) 26 1/4 (667 mm) Interior Width (in.) 56 (1422 mm) REFRIGERANT DATA Condensing Unit Size (H.P.) 1/4 Capacity (BTU/Hr)* 1940 ELECTRICAL DATA Voltage (int'l) 115/60/1 (220/50/1)	1/6 Size Pans (4" deep)	18
(incl. handles & bumpers) 35 (889 mm) Depth, Body Only (less doors) (in.) 27 1/2 (699 mm) Depth, Cutting Board (in.) 10 (254 mm) Height, Overall (in.) (incl. 5" casters) 42 1/4 (1073 mm) Shelf Area (sq. ft.) 8.1 (.8 sq m) No. of Shelves 2 No. of Doors 2 Interior Depth (in.) 19 3/8 (492 mm) Interior Height (in.) 26 1/4 (667 mm) Interior Width (in.) 56 (1422 mm) REFRIGERANT DATA Condensing Unit Size (H.P.) 1/4 Capacity (BTU/Hr)* 1940 ELECTRICAL DATA Voltage (int'I) 115/60/1 (220/50/1)	Width, Overall (in.)	60 (1524 mm)
Depth, Cutting Board (in.) 10 (254 mm) Height, Overall (in.) (incl. 5" casters) 42 1/4 (1073 mm) Shelf Area (sq. ft.) 8.1 (.8 sq m) No. of Shelves 2 No. of Doors 2 Interior Depth (in.) 19 3/8 (492 mm) Interior Height (in.) 26 1/4 (667 mm) Interior Width (in.) 56 (1422 mm) REFRIGERANT DATA Condensing Unit Size (H.P.) 1/4 Capacity (BTU/Hr)* 1940 ELECTRICAL DATA Voltage (int'I) 115/60/1 (220/50/1)	1 / / /	35 (889 mm)
Height, Overall (in.) (incl. 5" casters) Shelf Area (sq. ft.) 8.1 (.8 sq m) No. of Shelves 2 No. of Doors 2 Interior Depth (in.) 19 3/8 (492 mm) Interior Height (in.) 26 1/4 (667 mm) Interior Width (in.) 56 (1422 mm) REFRIGERANT DATA Condensing Unit Size (H.P.) 1/4 Capacity (BTU/Hr)* 1940 ELECTRICAL DATA Voltage (int'l) 115/60/1 (220/50/1)	Depth, Body Only (less doors) (in.)	27 1/2 (699 mm)
(incl. 5" casters) Shelf Area (sq. ft.) No. of Shelves 2 No. of Doors 2 Interior Depth (in.) Interior Height (in.) Interior Width (in.) REFRIGERANT DATA Condensing Unit Size (H.P.) Capacity (BTU/Hr)* ELECTRICAL DATA Voltage (int'l) Voltage (int'l) 8.1 (.8 sq m) 8.1 (.8 sq m) 8.1 (.8 sq m) 8.1 (.8 sq m) 19 3/8 (492 mm) 19 4/8 (667 mm) 11 4 (667 mm) 1/4 1940	Depth, Cutting Board (in.)	10 (254 mm)
No. of Shelves 2 No. of Doors 2 Interior Depth (in.) 19 3/8 (492 mm) Interior Height (in.) 26 1/4 (667 mm) Interior Width (in.) 56 (1422 mm) REFRIGERANT DATA Condensing Unit Size (H.P.) 1/4 Capacity (BTU/Hr)* 1940 ELECTRICAL DATA Voltage (int'l) 115/60/1 (220/50/1)	0 , ()	42 1/4 (1073 mm)
No. of Doors 2 Interior Depth (in.) 19 3/8 (492 mm) Interior Height (in.) 26 1/4 (667 mm) Interior Width (in.) 56 (1422 mm) REFRIGERANT DATA Condensing Unit Size (H.P.) 1/4 Capacity (BTU/Hr)* 1940 ELECTRICAL DATA Voltage (int'l) 115/60/1 (220/50/1)	Shelf Area (sq. ft.)	8.1 (.8 sq m)
Interior Depth (in.) Interior Height (in.) Interior Width (in.) REFRIGERANT DATA Condensing Unit Size (H.P.) Capacity (BTU/Hr)* ELECTRICAL DATA Voltage (int'l) 19 3/8 (492 mm) 19 3/8 (492 mm) 19 4/667 mm) 1422 mm) 1/4 1940 115/60/1 (220/50/1)	No. of Shelves	2
Interior Height (in.) 26 1/4 (667 mm) Interior Width (in.) 56 (1422 mm) REFRIGERANT DATA Condensing Unit Size (H.P.) 1/4 Capacity (BTU/Hr)* 1940 ELECTRICAL DATA Voltage (int'l) 115/60/1 (220/50/1)	No. of Doors	2
Interior Width (in.) 56 (1422 mm) REFRIGERANT DATA Condensing Unit Size (H.P.) 1/4 Capacity (BTU/Hr)* 1940 ELECTRICAL DATA Voltage (int'l) 115/60/1 (220/50/1)	Interior Depth (in.)	19 3/8 (492 mm)
REFRIGERANT DATA Condensing Unit Size (H.P.) 1/4 Capacity (BTU/Hr)* 1940 ELECTRICAL DATA Voltage (int'l) 115/60/1 (220/50/1)	Interior Height (in.)	26 1/4 (667 mm)
Condensing Unit Size (H.P.) 1/4 Capacity (BTU/Hr)* 1940 ELECTRICAL DATA Voltage (int'l) 115/60/1 (220/50/1)	Interior Width (in.)	56 (1422 mm)
Capacity (BTU/Hr)* 1940 ELECTRICAL DATA Voltage (int'l) 115/60/1 (220/50/1)	REFRIGERANT DATA	
ELECTRICAL DATA Voltage (int'l) 115/60/1 (220/50/1)	Condensing Unit Size (H.P.)	1/4
Voltage (int'l) 115/60/1 (220/50/1)	Capacity (BTU/Hr)*	1940
	ELECTRICAL DATA	
Fans 3	Voltage (int'l)	115/60/1 (220/50/1)
	Fans	3

SHIPPING DATA

Total Amps (int'l)

Weight (lbs.)	322 (146 kg)
Height - Crated (in.)	43 1/4 (1099 mm)
Width - Crated (in.)	68 1/4 (1734 mm)
Depth - Crated (in.)	46 (1168 mm)

^{*} Rating @ +25°F evaporator, 90°F ambient

10 ft. Cord/Plug [attached] (int'l)

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country) Fax: 215-244-9579

Refrigerator

Toll-Free: 800-523-7138 Phone: 215-244-1400

6.6 (4.4)

Yes (No)

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com


Due to our continued efforts in developing innovative products, specifications subject to change without notice.







© Copyright 2014. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

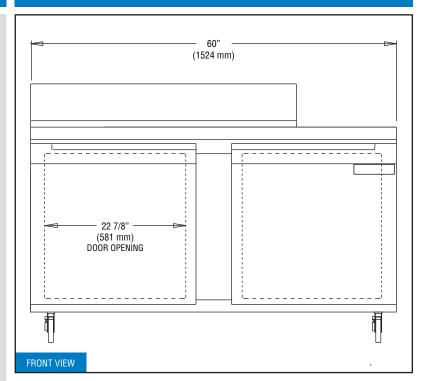

Model Plan Views

