SANDWICH UNIT REFRIGERATOR

Model: SW60-8C-FB-D

60" Cutting Top Sandwich Unit Refrigerator with Drawers - 8 Pans Front Breathing

Stainless steel front and top, aluminum end panels, case back and interior. Certified under NSF-7 to maintain temperatures in 86°F ambient and designed to maintain NSF-7 temperatures in 100°F ambient.



Options and Accessories

(upcharge and lead times may apply)		
Stainless steel exterior and interior - SS models	Solid doors in lieu of drawers	
Stainless steel end panels - SA models	Expansion valve system	
Glass doors in lieu of drawers - GD models	Rear-mounted cutting board	
Stainless steel finished back in lieu of aluminum	Flat insulated night cover	
Overshelves (single or double)	Remote models	
Automatic, electric condensate evaporator	Drawer locks	
Three tier drawers		

Consult factory for other model configurations, options and accessories.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Project Name:	
Model Specified:	
Location:	
Item No:	Quantity:
AIA #:	SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Performance-rated refrigeration system
Environmentally-safe R-134a refrigerant
Unique air flow distribution allows pan product to maintain 33° - 41°F
Automatic, energy saving, non-electric condensate evaporator
Non-corrosive, plasticized fin evaporator coil
Easily serviceable, back mounted compressor

CABINET ARCHITECTURE

MODEL FEATURES

(8) 1/6 size non-recessed pans, 4" deep	
Interior hanging thermometer	

Front breathers are a unique, field assembled, bottom mounted ventilation system designed to allow cabinets to be flush against a wall or built into a counter to conserve space.

APPROVAL:

Model Specifications


DIMENSIONAL DATA	
Net Capacity (cu. ft.)	17.0 (481 cu l)
1/6 Size Pans (4" deep)	8
Width, Overall (in.)	60 (1524 mm)
Depth, Overall (in.) (incl. cutting board & bumpers)	38 1/4 (972 mm)
Depth, Body Only (less drawers) (in.)	27 1/2 (699 mm)
Depth, Cutting Board (in.)	19 (483 mm)
Height, Overall (in.) (incl. 3 5/8" casters)	40 7/8 (1038 mm)
No. of Drawers (two tier)	4
No. of Drawers (three tier)	6
REFRIGERANT DATA	
Condensing Unit Size (H.P.)	1/4
Capacity (BTU/Hr)*	1940
ELECTRICAL DATA	
Voltage (int'l)	115/60/1 (220/50/1)
Fans	3
Total Amps (int'l)	6.6 (4.4)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)
SHIPPING DATA	
Weight (lbs.)	315 (143 kg)
Height - Crated (in.)	43 1/4 (1099 mm)
Width - Crated (in.)	68 1/4 (1734 mm)
Depth - Crated (in.)	46 (1168 mm)
DRAWER RAN CONFIGURATIONS	


DRAWER PAN CONFIGURATIONS

Two Tier: (1) 12 x 20 x 6 pan per drawer

- Three Tier: (1) 12 x 20 x 4 pan per drawer


* Rating @ +25°F evaporator, 90°F ambient Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

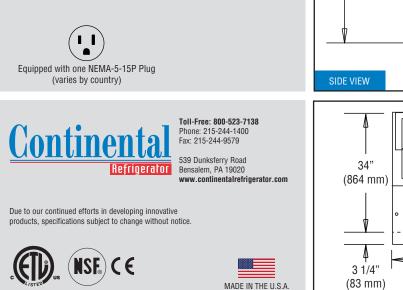

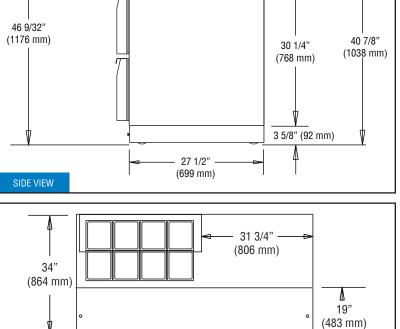

60"-

(1524 mm)

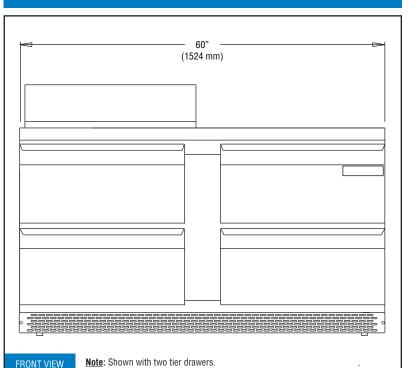

38 1/4" (972 mm) 35" (889 mm)

•

(279 mm) ₩

PAN TOP CONFIGURATION

1" (25 mm)

Model Plan Views

© Copyright 2013. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

SW60-8C-FB-D (9/23/13)

V