SANDWICH UNIT REFRIGERATOR

Model: **SW72-18**

72" Standard Top Sandwich Unit Refrigerator with Solid Doors - 18 Pans

Stainless steel front and top, aluminum end panels, case back and interior. Certified under NSF-7 to maintain temperatures in 86°F ambient and designed to maintain NSF-7 temperatures in 100°F ambient.



Options and Accessories

(upcharge and lead times may apply)		
Stainless steel exterior and interior - SS models	Expansion valve system	
Stainless steel end panels - SA models	Rear-mounted cutting board	
Glass doors in lieu of solid doors - GD models	Flat insulated night covers	
Stainless steel finished back in lieu of aluminum	Remote models	
Drawers in lieu of doors	Door locks	
Overshelves (single or double)	Adjustable legs	
Stainless steel shelves	Digital thermometer	
Additional epoxy-coated steel shelves	Crumb catcher	
Automatic, electric condensate evaporator		

Consult factory for other model configurations, options and accessories.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Project Name:	
Model Specified:	
Location:	
Item No:	Quantity:
AIA #:	SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Performance-rated refrigeration system
Environmentally-safe R-134a refrigerant
Unique air flow distribution allows pan product to maintain 33° - 41°F
Automatic, energy saving, non-electric condensate evaporator
Non-corrosive, plasticized fin evaporator coil
Easily serviceable, back mounted compressor

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation
Spring loaded, self closing doors
Magnetic snap-in door gaskets
Heavy-duty, epoxy-coated steel shelves
12" deep, full length nylon cutting board
Insulated lids
5" casters
Completely enclosed, vented and removable case back


MODEL FEATURES


(18) 1/6 size non-recessed pans, 4" deep
Interior hanging thermometer
Field rehingeable doors


APPROVAL:

Model Specifications

DIMENSIONAL DATA	
Net Capacity (cu. ft.)	20.6 (583 cu l)
1/6 Size Pans (4" deep)	18
Width, Overall (in.)	72 (1829 mm)
Depth, Overall (in.) (incl. handles & bumpers)	31 7/16 (799 mm)
Depth, Body Only (less doors) (in.)	27 1/2 (699 mm)
Depth, Cutting Board (in.)	12 (305 mm)
Height, Overall (in.) (incl. 5" casters)	42 1/4 (1073 mm)
Shelf Area (sq. ft.)	10.2 (.9 sq m)
No. of Shelves	3
No. of Doors	3
Interior Depth (in.)	19 3/8 (492 mm)
Interior Height (in.)	26 1/4 (667 mm)
Interior Width (in.)	68 (1727 mm)
REFRIGERANT DATA	
Condensing Unit Size (H.P.)	1/4
Capacity (BTU/Hr)*	1940
ELECTRICAL DATA	
Voltage (int'l)	115/60/1 (220/50/1)
Fans	4
Total Amps (int'l)	7.6 (4.7)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)
SHIPPING DATA	
Weight (lbs.)	389 (176 kg)
Height - Crated (in.)	43 1/4 (1099 mm)
Width - Crated (in.)	80 1/4 (2038 mm)
Depth - Crated (in.)	46 (1168 mm)

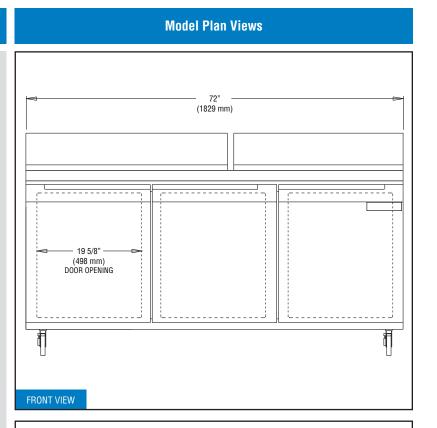

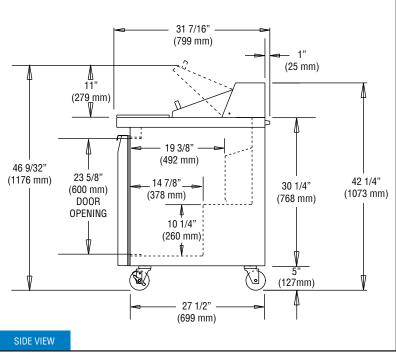



* Rating @ +25°F evaporator, 90°F ambient

whole unit.

Figures in parentheses reflect metric equivalents rounded to the nearest





www.continentalrefrig

Due to our continued efforts in developing innovative products, specifications subject to change without notice.





SIDE VIEW