



## Chemical Sanitizing Glasswasher

### FEATURES:

- **NEW** Noise Suppression Technology (NST).
- 20 racks / 80 covers per hour.
- Economical to operate. Uses only 1.7 gallons of water per cycle.
- All stainless steel construction assures long life and years of trouble-free operation.
- Unique spray arm system features upper and lower stainless steel wash arms with reinforced end caps.
- Double skin stainless steel provides consistent heating and a quiet operation.
- Built-in chemical pumps assure proper chemical usage.
- Deliming system.
- Pumped drain allows for flexible installation. Requires no floor drain.
- Pump purging system improves results by eliminating soil and chemical carryover during rinse cycle.
- Auto fill and drain system.
- Water inlet comes with built-in strainer, prevents debris from clogging the water valve.
- 4" legs.
- Dishmachine comes with 2 dishracks, (1) peg and (1) flat.
- Large 11" door clearance to accommodate all size glasses.

### Available Options

- Sanitizer Alarm
- CMA Temp-Sure™ (Self contained 12kW heater)
- 48" Undercounter Dishtable
- Pedestal
- 6" legs



### The New L-1C (NST) Low Temperature Glasswasher


Introducing CMA's "Noise Suppression Technology", combining sophisticated pump engineering, double wall construction, and sound deadening materials has reduced the noise output 50%, without sacrificing horse power or pump pressure. This is the ideal "behind the bar" glasswasher, providing outstanding results, economical to operate, and quiet operation. This glasswasher utilizes a recirculating wash system followed by a fresh water chemical sanitizing rinse. The "built-in" chemical dispensing system is programmable to provide precise chemical dosage per cycle.





## Chemical Sanitizing Glasswasher

**WARNING:** Plumbing connections must be made by a qualified service company who will comply with all available Federal, State, and Local Health, Plumbing and Safety codes.

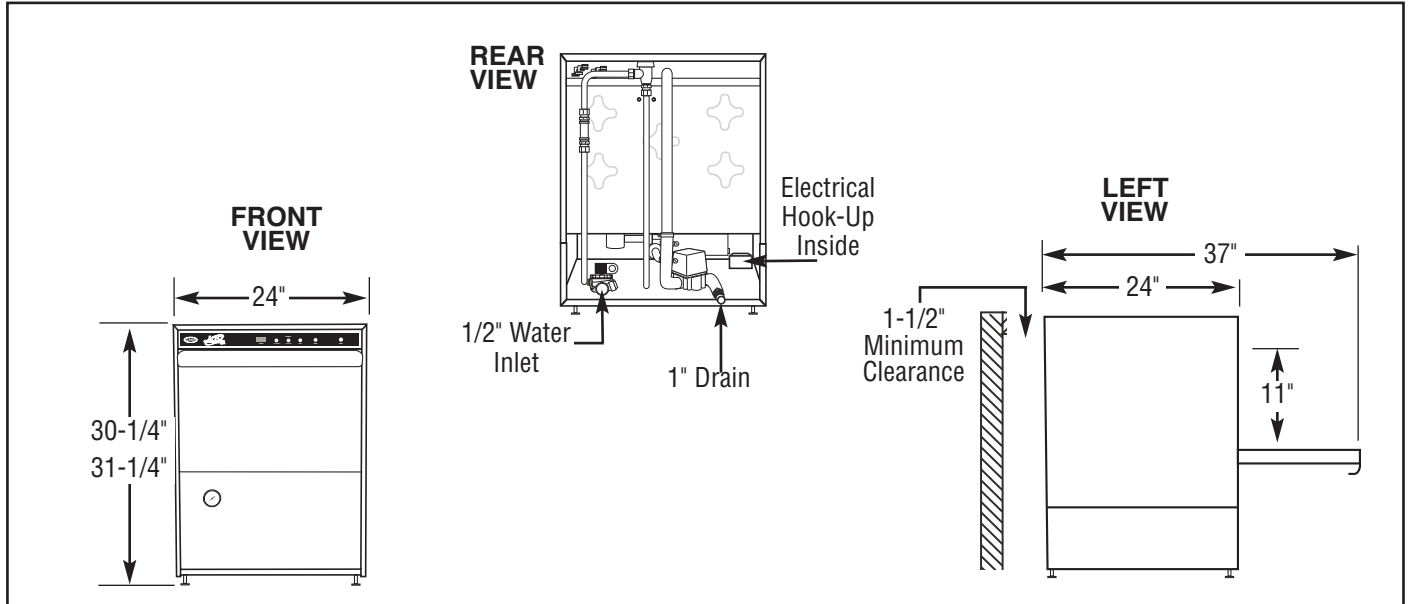

### Specifications:

MODEL L-1C	USA	METRIC		USA	METRIC
<b>OPERATING CAPACITY</b> RACKS PER HOUR (NSF RATED)	20	20	<b>WASH PUMP MOTORS HP</b>	1	1
<b>OPERATING CYCLE</b>			<b>DIMENSIONS</b>		
INITIAL FILL-SEC	30	30	DEPTH	24"	(61cm)
WASH TIME-SEC	58	58	WIDTH	24"	(61cm)
RINSE TIME-SEC	32	32	HEIGHT	30-1/4"-31-1/4"	(77-79 cm)
DWELL/PURGE-SEC	30	30	MAXIMUM CLEARANCE		
DRAIN	30	30	HEIGHT FOR GLASSES	11"	(28cm)
TOTAL CYCLE TIME	3 MIN	3 MIN	<b>STANDARD DISHRACK</b>	1	1
WASH TANK CAPACITY	1.7 GAL.	(6.43 L)	DIMENSIONS	19-3/4"X19-3/4"	(50X50cm)
WASH PUMP CAPACITY	35 GPM	(132 LPM)	<b>ELECTRICAL RATING</b>	<b>VOLTS</b>	<b>AMPS</b>
<b>OPERATING TEMPERATURE</b>				115	11
REQUIRED	120°F	(49°C)	<b>SHIPPING WEIGHT</b>		
RECOMMENDED	140°F	(60°C)	APPROXIMATE	196#	(88kg)
<b>WATER CONSUMPTION</b>					
PER RACK	1.7 GAL.	(6.43 L)			
PER HOUR	34 GPH	(129 LPH)			
WATER INLET	1/2"	(1.27cm)			
DRAIN	1"	(2.54cm)			

### Summary Specifications: Model L-1C

CMA model L-1C, low temperature, undercounter, chemical sanitizing, commercial glasswasher meets NSF, UL and CUL sanitation and construction standards WITHOUT the use of BOOSTER or TANK HEATERS. The model L-1C is constructed entirely of stainless steel. Automatically washes, rinses and sanitizes food service utensils in standard 19-3/4"X19-3/4" racks. This model comes standard with upper and lower stainless steel wash arms. The L-1C incorporates a pump purging system that improves results by eliminating soil and chemical carryover during rinse cycle.

### New Innovative Noise Suppression Technology (NST)

