


Encore® QUIK-FLO™ Rotary Drain

DBN-80xx Series

- DBN-8000 Capped overflow outlet
- DBN-8000-SP1 Capped overflow, flat strainer
- DBN-8015-SP1 Overflow assembly, flat strainer

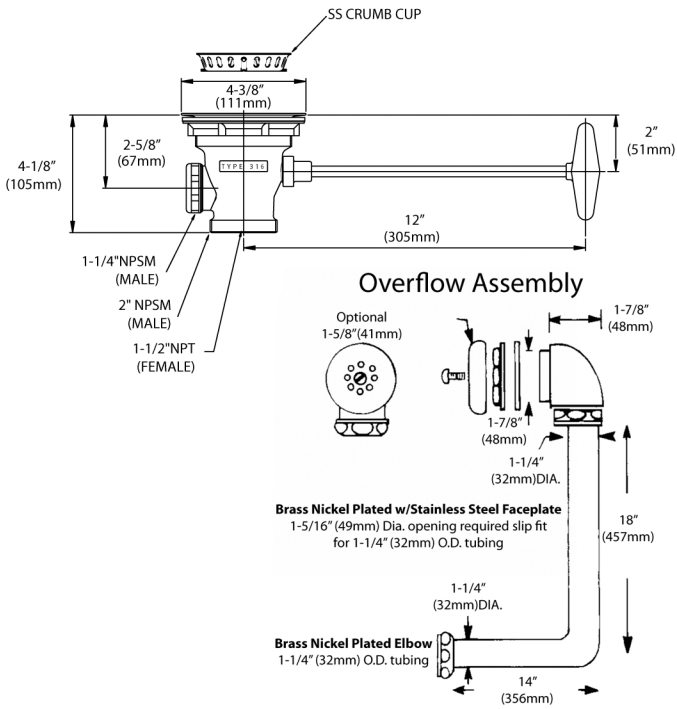

Dimensions shown in inches (mm) are for reference only and are subject to change.

1-1/2" or 2" NPS Male waste outlet
 Flow Rate: Max 40gpm

Approximate shipping weight - 5 lbs
 Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality

Commercial Quality Features

- Nickel plated cast brass drain body
- Self-centering stainless steel face flange
- Stainless steel rotary handle
- 3 times the flow rate of conventional lever drains
- Services from the top; no disassembly required

SPECIFICATIONS:

Rotary Drain to be Encore DBN-8000 Series in the following configuration:

- _____ DBN-8000 Capped overflow
- _____ DBN-8000-SP1 Capped overflow; flat strainer
- _____ DBN-8015-SP1 With overflow assembly; flat strainer

Drain to have nickel plated solid all metal construction. Drain to be for 3-1/2" sink opening diameter. Drain to have self-centering stainless steel face flange with stainless steel beehive crumb cup strainer. Drain to be designed for trouble free fast drainage when the stainless steel rotary handle is in the open position and has a positive sealing action when closed. Drain to accept 1-1/4" OD overflow elbow tube. To be universal style for use with both 2" or 1-1/2" NPSM outlet.

US Patent 6,145,136



COMPLIES WITH:
 ANSI A112.18.1/B125