


Encore® Drain Master™ Rotary Drain

DSS-80xx Series

- DSS-8000 Capped overflow outlet
- DSS-8000-SP1 Capped overflow, 5" handle
- DSS-8000-SP2 Capped overflow, 18" handle
- DSS-8015 With overflow assembly
- DSS-8015-P With overflow assembly, prison package

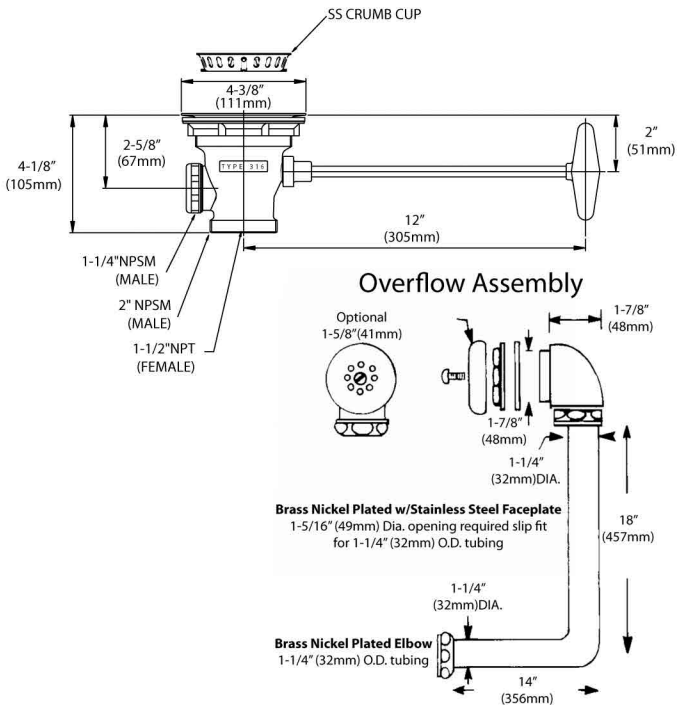

Dimensions shown in inches (mm) are for reference only and are subject to change.

1-1/2" or 2" NPS Male waste outlet
 Flow Rate: Max 40gpm

Approximate shipping weight - 5 lbs
 Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality

Commercial Quality Features

- Type 316 stainless steel drain body
- Self-centering stainless steel face flange
- Stainless steel rotary handle
- 3 times the flow rate of conventional lever drains
- Services from the top; no disassembly required

SPECIFICATIONS:

Rotary Drain to be Encore DSS-8000 Series in the following configuration:

- ___ DSS-8000 Capped overflow
- ___ DSS-8000-SP1 Capped overflow, 5" handle
- ___ DSS-8000-SP2 Capped overflow, 18" handle
- ___ DSS-8015 With overflow assembly
- ___ DSS-8015-P With overflow assembly, prison package

Drain to have Type 316 stainless steel construction. Drain to be sized for 3-1/2" sink opening diameter. Drain to have self-centering stainless steel face flange with stainless steel beehive crumb cup strainer. The stainless steel rotary handle in the open position drain shall allow for fast drainage and shall have a positive sealing action when closed. Drain to accept 1-1/4" OD overflow elbow tube. To be universal style for use with both 2" or 1-1/2" NPSM outlet.

US Patent 6,145,136

AVAILABLE OPTIONS:

- DSS-Y003 Replacement Crumb Cup
- DSS-Y007 Flat Strainer
- DSS-Y006 Strainer Retainer Kit



COMPLIES WITH:
 ANSI A112.18.1/B125