

1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701 Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110 www.encoreplumbing.com • www.componenthardware.com

PROJECT NAME.	
LOCATION:	
SPECIFIER ITEM	NO.


QTY:

ENCORE PART NO.

Encore® Wall Mount Service Sink Faucet **K77-8002-xx Series**

K77-8002 K77-8002-CV Compression Valves Ceramic Valves



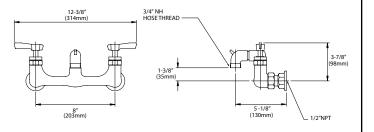

Dimensions shown in inches (mm) are for reference only and are subject to change.

1-1/8" (29mm) holes for backsplash are recommended to accommodate 1/2" supply nipples. 1/2" NPT Female Inlets

Approximate shipping weight - 5 lbs Warranty - 2 years parts Solid heavy duty cast body is specification and commercial quality

Commercial Quality Features

т маме

- Rough chrome finish
- Heavy duty 2" cast spout
- ADA-compliant lever handles
- · Garden hose thread and pail hook

SANIGUARD® Product Protection

- · Permanently incorporated on all touch points of Encore plumbing fixtures
- Inorganic, silver ion technology inhibits growth of common bacteria, yeasts, mold and fungi, minimizes cross-contamination

SPECIFICATIONS:

Wall Mount Service Sink Faucet to be Encore K77-8002 Series in the following configuration:

____ K77-8002 K77-8002-CV Compression Valves Ceramic Valves

Faucet body to be constructed of rough chrome plated brass with lever handles. Handles to be incorporated with SANIGUARD product protection. Supply inlets to be 8" (203mm) on center. Valves to be 1/4-turn with integral check valve to prevent cross-flow and back-flow. Color coded temperature indexes shall meet international standards. Heavy duty cast spout to have 3/4" garden hose thread and be equipped with integral pail hook.