

**PROJECT NAME:** \_\_\_\_\_


**LOCATION:** \_\_\_\_\_

**SPECIFIER ITEM NO.** \_\_\_\_\_ **QTY:** \_\_\_\_\_

**ENCORE PART NO.** \_\_\_\_\_

Encore<sup>®</sup> Wall Mount Service Sink Faucet  
**K77-8x06-BR Series**

K77-8006-BR      Compression Valves  
 K77-8106-BR      Ceramic Valves

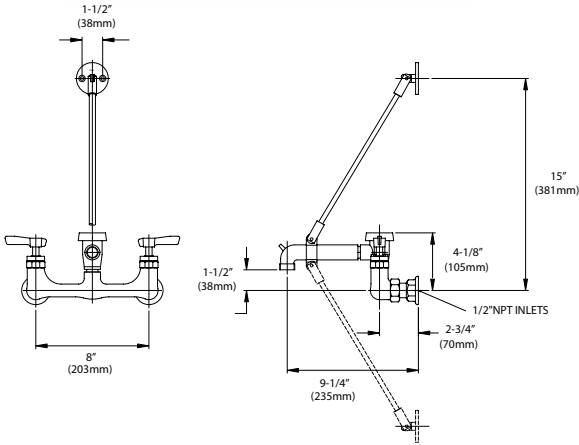

Dimensions shown in inches (mm) are for reference only and are subject to change.

1-1/8" (29mm) holes for backsplash are recommended to accommodate 1/2" supply nipples.

1/2" NPT Female Inlets

Operating Temperature: 40-180°F (5-83°C)

Operating Pressure: 15-125psi

Approximate shipping weight - 8 lbs  
 Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality

**Commercial Quality Features**

- Rough chrome finish
- 6" vacuum breaker spout design
- ADA-compliant lever handles
- Garden hose thread and pail hook
- Top support wall bracket
- Vacuum breaker spout

**SANIGUARD<sup>®</sup> Product Protection**

- Permanently incorporated on all touch points of Encore plumbing fixtures
- Inorganic, silver ion technology inhibits growth of common bacteria, yeasts, mold and fungi, minimizes cross-contamination

**SPECIFICATIONS:**

Wall Mount Service Sink Faucet to be Encore K77-8x06-BR Series in the following configuration:

\_\_\_\_\_ K77-8006-BR      Compression Valves  
 \_\_\_\_\_ K77-8106-BR      Ceramic Valves

Faucet body to be constructed of rough chrome plated brass with lever handles. Handles to be incorporated with SANIGUARD product protection. Supply inlets to be 8" (203mm) on center. Valves to be 1/4-turn with integral check valve to prevent cross-flow and back-flow. Color coded temperature indexes shall meet international standards. 6" vacuum breaker spout to have 3/4" garden hose thread and be equipped with integral pail hook. Top support wall bracket included as standard.

**COMPLIES WITH:**  
 ANSI A112.18.1/B125

