

1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701 Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110 www.encoreplumbing.com • www.componenthardware.com

PROJECT NAME:	
LOCATION:	
SPECIFIER ITEM NO	QTY:
ENCORE PART NO.	

Encore® Wall Mount Service Sink Faucet **KC77-2136-VY2**



Solid heavy duty cast body is specification and commercial quality

Commercial Quality Features


- · Polished chrome plated cast brass body
- · ADA-compliant cross handles
- · Built-in check valves to prevent cross-flow and back-flow

SANIGUARD® Product Protection

- · Permanently incorporated on all touch points of Encore plumbing fixtures
- Inorganic, silver ion technology inhibits growth of common bacteria, yeasts, mold and fungi, minimizes cross-contamination

SPECIFICATIONS:

Wall Mount Service Sink Faucet to be Encore KC77-2136-VY2. Faucet body to be constructed of polished chrome plated brass with ADA compliant cross handles. Handles to be incorporated with SANIGUARD treatment. Atmospheric vacuum breaker heavy duty 7" cast spout with pail hook and standard 3/4" garden hose threaded outlet. Valves to be 1/4-turn full volume compression type with integral check valves to prevent cross-flow and backflow. Supply inlets to be 8" (203mm) on center, offset 2-1/2", adjustable from 3-3/8" to 8-3/8". 15" wall brace standard.

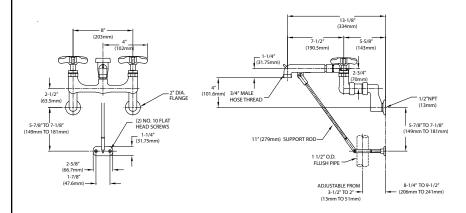

Dimensions shown in inches (mm) are for reference only and are subject to change.

Approximate shipping weight - 5 lbs

Warranty - 2 years parts

Operating Pressure: 15 - 125psi

Inlets adjustable from 4" (102mm) to 8" (203mm)

Operating Temperature: 40 - 180°F (5 - 83°C)

Note: 1-1/8" (29mm) holes for backsplash are recommended to accommodate 1/2" supply nipples

1/2" NPSM Female Inlets

