

1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701 Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110 www.encoreplumbing.com • www.componenthardware.com

PROJECT NAME:	
LOCATION:	
SPECIFIER ITEM NO.	QTY:
ENCORE PART NO.	

Encore® Wall Mount Service Sink Faucet **KC77-5147-VY1**



1/2" NPSM Female Inlets Inlets adjustable from 4" (102mm) to 8" (203mm) Operating Temperature: 40 - 180°F (5 - 83°C) Operating Pressure: 15 - 125psi Note: 1-1/8" (29mm) holes for backsplash are recommended to accommodate 1/2" supply nipples.

Approximate shipping weight - 5 lbs Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality

Commercial Quality Features


- · Polished chrome plated cast brass body
- ADA-compliant lever handles
- · Built-in check valves to prevent cross-flow and back-flow

SANIGUARD® Product Protection

- · Permanently incorporated on all touch points of Encore plumbing fixtures
- Inorganic, silver ion technology inhibits growth of common bacteria, yeasts, mold and fungi, minimizes cross-contamination

SPECIFICATIONS:

Wall Mount Service Sink Faucet to be Encore KC77-5147-VY1. Faucet body to be constructed of polished chrome plated brass with ADA compliant lever handles. Handles to be incorporated with SANIGUARD treatment. Atmospheric vacuum breaker heavy duty 7" cast spout with pail hook and standard 34" garden hose threaded outlet. Valves to be 1/4-turn full volume compression type with integral check valves to prevent cross-flow and backflow. Supply inlets to be 8" (203mm) on center, offset 2-1/2", adjustable from 3-3/8" to 8-3/8". 15" wall brace standard.

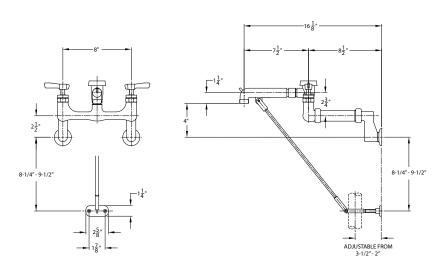

Dimensions shown in inches (mm) are for reference only and are subject to change.

