


Encore[®] Enclosed Hose Reel Assembly
with Control Cabinet

KHR-2339-x Series

KHR-2339 Gray Powder Coated (*shown*)

KHR-2339-S Stainless Steel

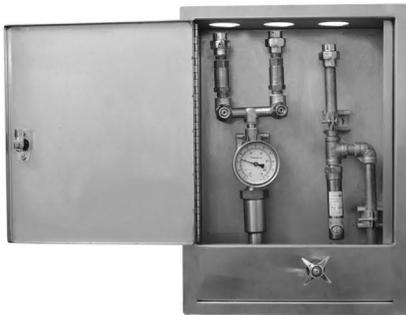

3/8"-18 NPT Inlets

Hose Operating Temperature: 210°F (99°C)

Hose Operating Pressure: 250psi (18 BAR)

Approximate shipping weight - 100 lbs.

Warranty - 4 years parts

Hose reel is specification and commercial quality.

Commercial Quality Features

- Universal ceiling, floor or wall mount
- Heavy duty springs for hose recoil
- Positive latch for stationary hose operation
- Pre-rinse with insulated handle and heavy duty face bumper

SPECIFICATIONS:

Enclosed hose reel assembly to be Encore KHR-2339 Series in the following configuration:

____ KHR-2339 Gray Powder Coated Reel

____ KHR-2339-S Stainless Steel Reel

Hose to be 30' (9.1m) in length with stainless steel hose guard. Recoil bumper to be included. 3.3gpm spray face at 60psi standard. Latching mechanism to hold hose at desired length while operating; retracts automatically.


Stainless steel control cabinet to include control valve, dual check valves, thermometer and water hammer arrestor. The main shut-off valve to be located behind front panel and may be operated from the outside of the closed cabinet. Cylinder lock standard.

KHR-2339-x Series

Enclosed Hose Reel Assembly with Control Cabinet

PREMIUM PLUMBING PRODUCTS
Encore®

1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701
Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110
www.encoreplumbing.com • www.componenthardware.com

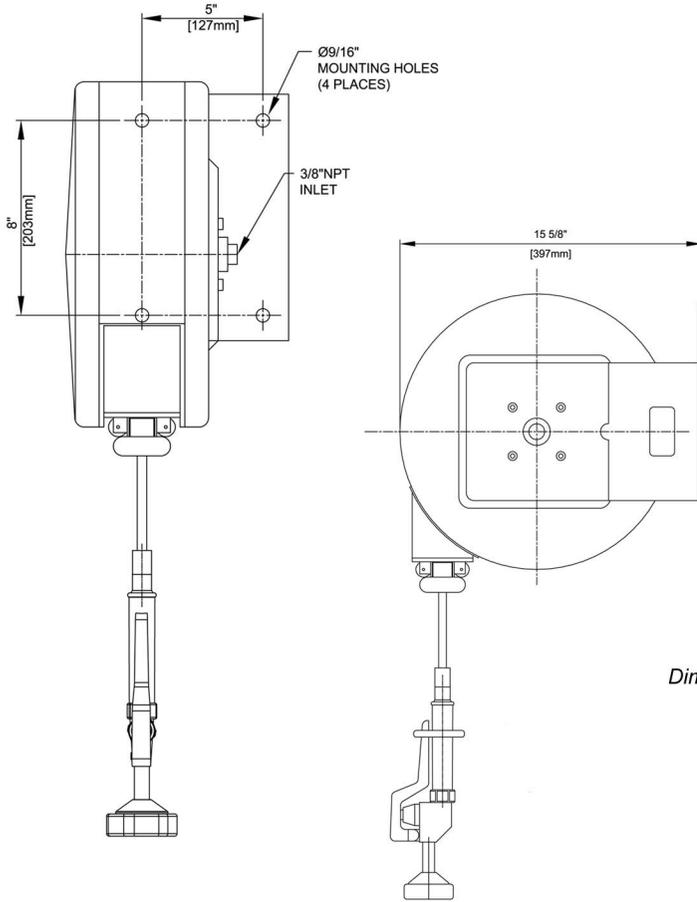

Dimensions shown in inches (mm) are for reference only and are subject to change.

