

PROJECT NAME: _____


LOCATION: _____

SPECIFIER ITEM NO. _____ **QTY:** _____

ENCORE PART NO. _____

Encore[®] Pre-Rinse Open Hose Reel Assembly
KHR-5635-O(xx) Series

KHR-5635-O Gray Powder Coated (*shown*)
 KHR-5635-OSS Stainless Steel

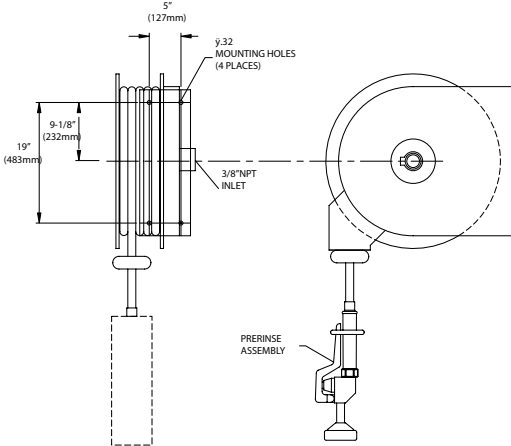

Dimensions shown in inches (mm) are for reference only and are subject to change.

3/8"-18 NPT Inlets
 Hose Operating Temperature: 210°F (99°C)
 Hose Operating Pressure: 250psi (18 BAR)

Approximate shipping weight - 29 lbs
 Warranty - 4 years parts

Hose reel is specification and commercial quality.

Commercial Quality Features

- Universal ceiling, floor or wall mount
- Heavy duty springs for hose recoil
- Positive latch for stationary hose operation
- Pre-rinse with insulated handle and heavy duty face bumper

SANIGUARD[®] Product Protection

- Permanently incorporated on all touch points of Encore plumbing fixtures
- Inorganic, silver ion technology inhibits growth of common bacteria, yeasts, mold and fungi, minimizes cross-contamination

SPECIFICATIONS:

Pre-rinse open hose reel assembly to be Encore KHR-5635-O Series in the following configuration:

- _____ KHR-5635-O Gray Powder Coated
- _____ KHR-5635-OSS Stainless Steel

Hose reel to be constructed of gray powder coated steel or stainless steel. Handle and grip to be incorporated with SANIGUARD product protection. Hose to be 35' in length with stainless steel hose guard. Recoil bumper to be included.

