



1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701
Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110
www.encoreplumbing.com • www.componenthardware.com

PROJECT NAME: _____


LOCATION: _____

SPECIFIER ITEM NO. _____ QTY: _____

ENCORE PART NO. _____

Encore® Wall Mount Base with 6" Swivel Gooseneck Spout and Dual Pedal Foot Operated Valve

KL25-1000-KIT9

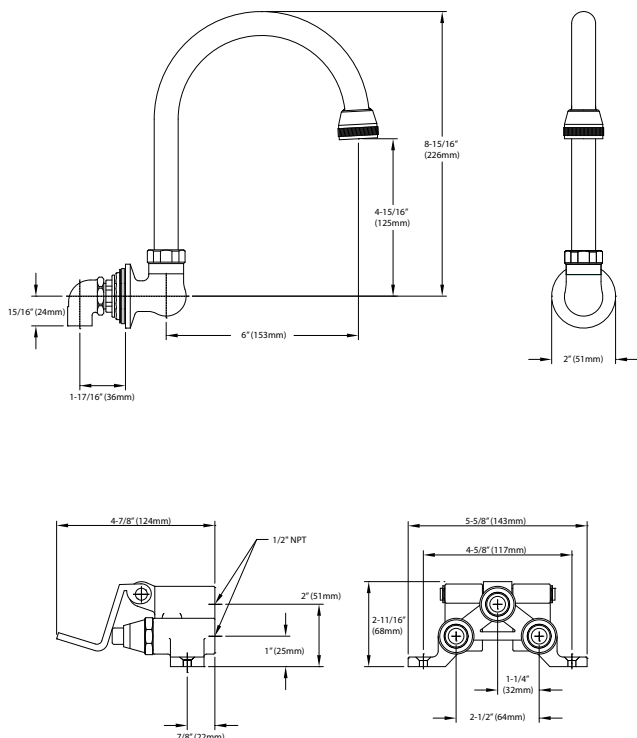

Dimensions shown in inches (mm) are for reference only
and are subject to change.

Spout Base:

1/2" NPSM Male Inlet

Operating Temperature: 40 - 180°F

Operating Pressure: 20 - 125psi

Pedal Valve:

(2) 1/2" NPT Female Inlets

(1) 1/2" NPT Female Outlet

Operating Temperature: 40 - 180°F

Operating Pressure: 20 - 125psi

#10 mounting holes

Approximate shipping weight - 5 lbs

Warranty - 2 years parts

Solid heavy duty cast brass

Commercial Quality Features

- Polished chrome plated cast brass faucet body
- Leak proof double O-ring spout design
- Polished chrome dual foot pedal valve
- Stainless steel spout

SPECIFICATIONS:

Faucet body to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. Spout to be 6" stainless steel swivel gooseneck style with leak proof double O-ring seal design. 6.0gpm wide rose spray spout tip. Dual foot pedal valve to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. Valves to be self-closing. Foot pedals to be brass with color-coded indicators for hot & cold.

COMPLIES WITH:

ASME A112.18.1-2005

CSA B125.1-05

NSF/ANSI 61/9, ANNEX G

SECTION 116875 OF THE
CALIFORNIA HEALTH & SAFETY CODE
(COMMONLY KNOWN AS AB1953)

VERMONT ACT 193

UNIFORM PLUMBING CODE

