


1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701 Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110 www.encoreplumbing.com • www.componenthardware.com

| PROJECT NAME: | |
|-------------------|------|
| LOCATION: | |
| SPECIFIER ITEM NO | QTY: |
| ENCORE PART NO. | |

Encore® Dual Pedal Foot Operated Valve **KL25-1000**



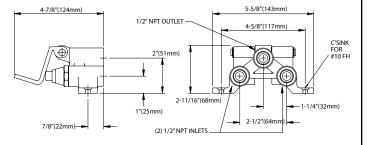

Dimensions shown in inches (mm) are for reference only and are subject to change.

Pedal Valve:

(2) ½" NPT Female Inlets (1) ½" NPT Female Outlet

Operating Temperature: 40 - 180°F Operating Pressure: 20 - 125psi

#10 mounting holes

Approximate shipping weight - 5 lbs Warranty - 2 years parts

Solid heavy duty cast brass

Commercial Quality Features

- · Foot operated valve
- · For use with spout bases
- · Self-closing valves
- · Color indexed pedals
- · Dual pedal operation
- (2) 1/2" NPT female inlets and (1) 1/2" NPT female outlet
- Rough chrome valve body with highly polished chrome foot pedals

SPECIFICATIONS:

Dual foot pedal to be Encore KL25-1000. Dual foot pedal valve to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. Valves to be self-closing. Foot pedals to be brass with color-coded indicators for hot and cold.

COMPLIES WITH:

ASME A112.18.1-2005
CSA B125.1-05
NSF/ANSI 61/9, ANNEX G
SECTION 118875 OF THE
CALIFORNIA HEALTH & SAFETY CODE
(COMMONLY KNOW AS AB1953)
VERMONT ACT 193
UNIFORM PLUMBING CODE



