

**PROJECT NAME:** \_\_\_\_\_

**LOCATION:** \_\_\_\_\_


**SPECIFIER ITEM NO.** \_\_\_\_\_ **QTY:** \_\_\_\_\_

**ENCORE PART NO.** \_\_\_\_\_

Encore<sup>®</sup> Wall Mount Kettle Faucet with Double Jointed Tubular Swing Spout and Cross Handles

**KL34-802x Series**

- KL34-8020 20" DJ spout, compression valves
- KL34-8022 22" DJ spout, compression valves
- KL34-8028 28" DJ spout, compression valves

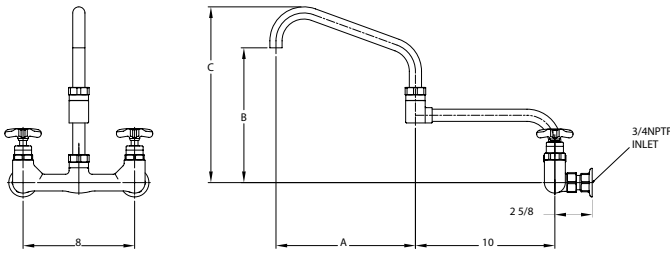

Dimensions shown in inches (mm) are for reference only and are subject to change.

3/4" NPT Female Inlets  
 Operating Temperature: 40 - 180°F (5 - 83°C)  
 Operating Pressure: 20 - 125psi

Approximate shipping weight - 9 lbs  
 Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality.

**Commercial Quality Features**

- Double jointed tubular swing spout design
- Cross handle design
- Built-in check valves to prevent cross-flow and back-flow
- Leak proof double O-ring spout design
- 1" diameter spout offers unrestricted water flow for quick filling of pots and kettles

**SANIGUARD<sup>®</sup> Product Protection**

- Permanently incorporated on all touch points of Encore plumbing fixtures
- Inorganic, silver ion technology inhibits growth of common bacteria, yeasts, mold and fungi, minimizes cross-contamination

**SPECIFICATIONS:**

Wall Mount Kettle Faucet to be Encore KL34 Series in the following configuration:

- \_\_\_\_\_ KL34-8020 20" DJ spout, compression valves
- \_\_\_\_\_ KL34-8022 22" DJ spout, compression valves
- \_\_\_\_\_ KL34-8028 28" DJ spout, compression valves

Faucet body to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. Faucet to have 8" adjustable inlet centers. Handles to be cross and incorporated with SANIGUARD treatment. Color coded temperature indexes shall meet international standards. Valves to be 1/4-turn with integral check valve to prevent cross-flow and back-flow. Spout to be double jointed tubular swing style with leak proof double O-ring seal design and full flow Quik-Fil<sup>™</sup> 1" dia. opening for flow rate of 5.0gpm @ 60psi.

| Model No. | A           | B               | C               |
|-----------|-------------|-----------------|-----------------|
| KL34-8020 | 10" (254mm) | 9-5/8" (244mm)  | 12-5/8" (321mm) |
| KL34-8022 | 12" (305mm) | 10-3/8" (264mm) | 13-3/8" (340mm) |
| KL34-8028 | 18" (457mm) | 12-5/8" (321mm) | 15-5/8" (397mm) |



**COMPLIES WITH:**  
 ASME A112.18.1-2005  
 CSA B125.1-05  
 NSF/ANSI 61/9, ANNEX G  
 SECTION 116875 OF THE  
 CALIFORNIA HEALTH & SAFETY CODE  
 (COMMONLY KNOWN AS AB1953)  
 VERMONT ACT 193  
 UNIFORM PLUMBING CODE

