

**PROJECT NAME:** \_\_\_\_\_

**LOCATION:** \_\_\_\_\_


**SPECIFIER ITEM NO.** \_\_\_\_\_ **QTY:** \_\_\_\_\_

**ENCORE PART NO.** \_\_\_\_\_

Encore® 8" (203mm) Deck Mount Faucet with Adjustable Gooseneck Spout and Lever Handles

## KL41-8x0x-SE1 Series

- KL41-8100-SE1 3" spout, ceramic valves
- KL41-8000-SE1 3" spout, compression valves
- KL41-8101-SE1 8" spout, ceramic valves
- KL41-8001-SE1 8" spout, compression valves
- KL41-8102-SE1 6" spout, ceramic valves
- KL41-8002-SE1 6" spout, compression valves

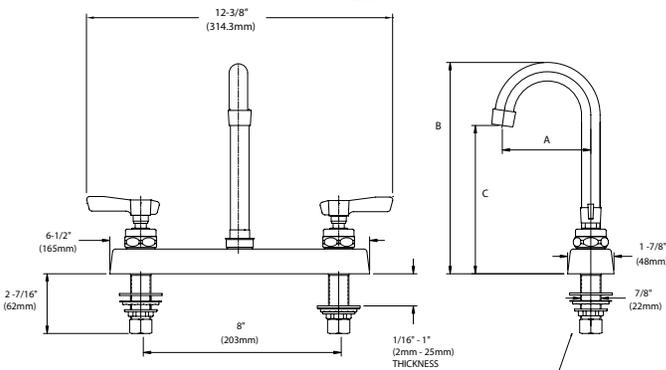

Dimensions shown in inches (mm) are for reference only and are subject to change.

1/2" NPSM Male Inlets

Operating Temperature: 40-180°F (5-83°C)

Operating Pressure: 15-125psi

Note: 1-1/8" (29mm) holes for deck are recommended to accommodate 1/2" supply nipples

Approximate shipping weight - 5 lbs

Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality.

### Commercial Quality Features

- Adjustable gooseneck spout design
- ADA-compliant lever handles
- Built-in check valves to prevent cross-flow and back-flow
- Stainless steel spout

### SANIGUARD® Product Protection

- Permanently incorporated on all touch points of Encore plumbing fixtures
- Inorganic, silver ion technology inhibits growth of common bacteria, yeasts, mold and fungi, minimizes cross-contamination

### SPECIFICATIONS:

Deck Mount Faucet to be Encore KL41 Series in the following configuration:

- \_\_\_\_\_ KL41-8100-SE1 3" spout, ceramic valves
- \_\_\_\_\_ KL41-8000-SE1 3" spout, compression valves
- \_\_\_\_\_ KL41-8101-SE1 8" spout, ceramic valves
- \_\_\_\_\_ KL41-8001-SE1 8" spout, compression valves
- \_\_\_\_\_ KL41-8102-SE1 6" spout, ceramic valves
- \_\_\_\_\_ KL41-8002-SE1 6" spout, compression valves

Faucet body to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. Lever handles to be incorporated with SANIGUARD treatment. Supply inlets to be 8" on center. Valves to be 1/4-turn with integral check valve to prevent cross-flow and back-flow. Spout to be stainless steel adjustable gooseneck style. Color coded temperature indexes shall meet international standards. 2.2gpm aerator @ 60psi standard with full flow stream bubbler screen spout tip.

Model No.	A	B	C
KL41-8100-SE1	3-1/2" (89 mm)	8-5/16" (211mm)	6-1/16" (154mm)
KL41-8000-SE1	3-1/2" (89 mm)	8-5/16" (211mm)	6-1/16" (154mm)
KL41-8101-SE1	8" (203mm)	14-9/16" (370mm)	8-13/16" (224mm)
KL41-8001-SE1	8" (203mm)	14-9/16" (370mm)	8-13/16" (224mm)
KL41-8102-SE1	6" (152mm)	9-3/16" (233mm)	5-1/2" (140mm)
KL41-8002-SE1	6" (152mm)	9-3/16" (233mm)	5-1/2" (140mm)

For a complete list of available options for KL41-8000 Series, see product configurator on reverse.

# KL41-8x0x-SE1 Series



1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701  
 Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110  
[www.encoreplumbing.com](http://www.encoreplumbing.com) • [www.componenthardware.com](http://www.componenthardware.com)

## Faucet Configuration for KL41-8000 Series

