

Encore®

PREMIUM PLUMBING PRODUCTS


1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701
 Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110
 www.encoreplumbing.com • www.componenthardware.com

PROJECT NAME: _____
LOCATION: _____
SPECIFIER ITEM NO. _____ **QTY:** _____
ENCORE PART NO. _____

Encore® 8" (203mm) Deck Mount Faucet with 8" Adjustable Gooseneck Spout, Pre-Rinse Sprayer and Lever Handles

K41-8301-96xx Series

K41-8301-96 No Vacuum Breaker
 K41-8301-96VB With In-Line Vacuum Breaker

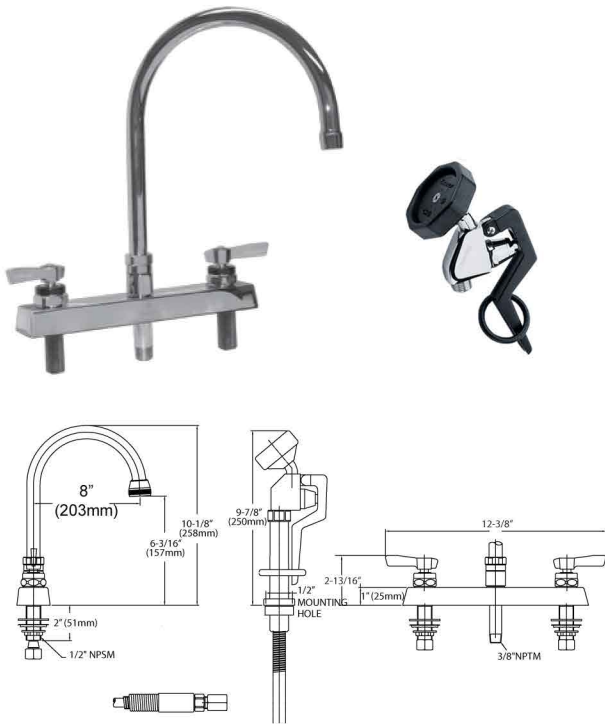

Dimensions shown in inches (mm) are for reference only and are subject to change.

1/2" NPS Male Inlet w/ 1/2" tube compression seals & nuts
 Operating Temperature: 40 - 180°F
 Operating Pressure: 15 - 125psi

Approximate shipping weight - 8 lbs
 Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality.

Commercial Quality Features

- 8" Adjustable gooseneck spout design
- ADA-compliant lever handles
- Built-in check valves to prevent cross-flow and back-flow
- Leak proof double O-ring spout design
- Stainless steel spout

SANIGUARD® Product Protection

- Permanently incorporated on all touch points of Encore plumbing fixtures
- Inorganic, silver ion technology inhibits growth of common bacteria, yeasts, mold and fungi, minimizes cross-contamination

SPECIFICATIONS:

Deck Mount Veterinary Spray to be Encore K41-8301-96 Series in the following configuration:

- ____ K41-8301-96 Without vacuum breaker
 ____ K41-8301-96VB With in-line vacuum breaker

Faucet body to be constructed of chrome plated brass with total lead content less than 0.25% by weighted average. Lever handles and sprayer grip to be incorporated with SANIGUARD product protection. Supply inlets to be 8" (203mm) on center. Valves to be 1/4-turn compressinn cartridges with integral check valves to prevent cross-flow and back-flow. Spout to be stainless steel adjustable gooseneck style with leak-proof double O-ring seal design. Color coded temperature indexes shall meet international standards. Faucet to have 6.0gpm wide rose spray with full flow stream bubbler screen spout tip. Faucet to include diverter assembly which allows water to be redirected from the spout to the spray hose automatically. Hose to be 96" flexible stainless steel clad with Santoprene® reinforced inner hose, stainless steel strain relief and O-ring seals. Angled sprayer to have full spray pattern, grip handle and 3.3gpm flow rate @60psi.



COMPLIES WITH:
 ASME A112.18.1-2005
 CSA B125.1-05
 NSF/ANSI 61/9, ANNEX G
 SECTION 116875 OF THE
 CALIFORNIA HEALTH & SAFETY CODE
 (COMMONLY KNOWN AS AB1953)
 VERMONT ACT 193
 UNIFORM PLUMBING CODE

