


# Encore®

PREMIUM PLUMBING PRODUCTS

1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701  
 Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110  
 www.encoreplumbing.com • www.componenthardware.com

**PROJECT NAME:** \_\_\_\_\_  
**LOCATION:** \_\_\_\_\_  
**SPECIFIER ITEM NO.** \_\_\_\_\_ **QTY:** \_\_\_\_\_  
**ENCORE PART NO.** \_\_\_\_\_

## Encore® 8" (203mm) Deck Mount Faucet with 8" Swivel Gooseneck Spout, Pre-Rinse Sprayer and 4" (102mm) Wrist Blade Handles **KL41-8301-964A**

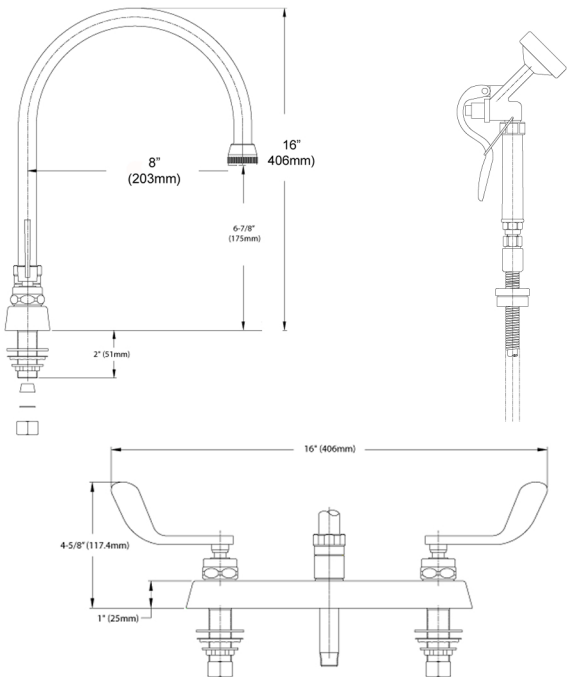

Dimensions shown in inches (mm) are for reference only and are subject to change.

1/2" NPS Male Inlet w/ 1/2" tube compression seals & nuts  
 Operating Temperature: 40 - 180°F  
 Operating Pressure: 15 - 125psi

Approximate shipping weight - 11 lbs  
 Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality.

### Commercial Quality Features

- 8" Swivel gooseneck spout design
- ADA-compliant 4" wrist blade handles
- Built-in check valves to prevent cross-flow and back-flow
- Leak proof double O-ring spout design
- Stainless steel spout

### SANIGUARD® Product Protection

- Permanently incorporated on all touch points of Encore plumbing fixtures
- Inorganic, silver ion technology inhibits growth of common bacteria, yeasts, mold and fungi, minimizes cross-contamination

### SPECIFICATIONS:

Deck Mount Faucet to be Encore KL41-8301-964A. Faucet body to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. 4" wrist blade handles to be incorporated with SANIGUARD product protection. Supply inlets to be 8" on center. Valves to be 1/4-turn compression cartridges with integral check valves to prevent cross-flow and back-flow. Spout to be stainless steel swivel gooseneck style with leak proof double O-ring seal design. Color coded temperature indexes shall meet international standards. 6.0gpm wide rose spray standard with full flow stream bubbler screen spout tip. Faucet to include diverter assembly which allows water to be redirected from the spout to the spray hose automatically. Hose to be 96" flexible stainless steel clad with Santoprene® reinforced inner hose, stainless steel strain relief and O-ring seals. Angled sprayer to be aluminum with full spray pattern and grip handle.

### COMPLIES WITH:

ASME A112.18.1-2005  
 CSA B125.1-05  
 NSF/ANSI 61/9, ANNEX G  
 SECTION 116875 OF THE  
 CALIFORNIA HEALTH & SAFETY CODE  
 (COMMONLY KNOWN AS AB1953)  
 VERMONT ACT 193  
 UNIFORM PLUMBING CODE

