

PROJECT NAME: _____

LOCATION: _____


SPECIFIER ITEM NO. _____ **QTY:** _____

ENCORE PART NO. _____

Encore[®] 4" (102mm) Wall Mount Faucet with Tubular Swing Spout and 4" Wrist Blade Handles

KL45-4xxx-SE4 Series

- KL45-4106-SE4 6" spout, ceramic valves
- KL45-4006-SE4 6" spout, compression valves
- KL45-4108-SE4 8" spout, ceramic valves
- KL45-4008-SE4 8" spout, compression valves
- KL45-4110-SE4 10" spout, ceramic valves
- KL45-4010-SE4 10" spout, compression valves
- KL45-4112-SE4 12" spout, ceramic valves
- KL45-4012-SE4 12" spout, compression valves

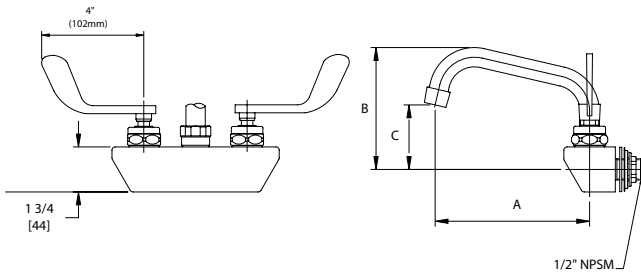

Dimensions shown in inches (mm) are for reference only and are subject to change.

1/2" NPSM Male Inlets
 Operating Temperature: 40-180°F (5-83°C)
 Operating Pressure: 15-125psi
 Note: 1-1/8" (29mm) holes for backsplash are recommended to accommodate 1/2" supply nipples

Approximate shipping weight - 5 lbs
 Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality for hand sinks.

Commercial Quality Features

- Tubular swing spout design
- ADA-compliant 4" wrist blade handles
- Built-in check valves to prevent cross-flow and back-flow
- Leak proof double O-ring spout design
- Stainless steel spout

SANIGUARD[®] Product Protection

- Permanently incorporated on all touch points of Encore plumbing fixtures
- Inorganic, silver ion technology inhibits growth of common bacteria, yeasts, mold and fungi, minimizes cross-contamination

SPECIFICATIONS:

Wall Mount Faucet to be Encore KL45 Series in the following configuration:

- _____ KL45-4106-SE4 6" spout, ceramic valves
- _____ KL45-4006-SE4 6" spout, compression valves
- _____ KL45-4108-SE4 8" spout, ceramic valves
- _____ KL45-4008-SE4 8" spout, compression valves
- _____ KL45-4110-SE4 10" spout, ceramic valves
- _____ KL45-4010-SE4 10" spout, compression valves
- _____ KL45-4112-SE4 12" spout, ceramic valves
- _____ KL45-4012-SE4 12" spout, compression valves

Faucet body to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. 4" wrist blade handles to be incorporated with SANIGUARD treatment. Supply inlets to be 4" on center. Valves to be 1/4-turn with integral check valve to prevent cross-flow and back-flow. Spout to be stainless steel tubular swing style with leak proof double O-ring seal design. Color coded temperature indexes shall meet international standards. 2.2gpm aerator @ 60psi standard with full flow stream bubbler screen spout tip.

Model No.	A	B	C
KL45-4106-SE4	6" (152mm)	4-3/4" (121mm)	2-1/2" (64mm)
KL45-4006-SE4	6" (152mm)	4-3/4" (121mm)	2-1/2" (64mm)
KL45-4108-SE4	8" (203mm)	5-1/4" (133mm)	3" (76mm)
KL45-4008-SE4	8" (203mm)	5-1/4" (133mm)	3" (76mm)
KL45-4110-SE4	10" (254mm)	5-11/16" (144mm)	3-7/16" (87mm)
KL45-4010-SE4	10" (254mm)	5-11/16" (144mm)	3-7/16" (87mm)
KL45-4112-SE4	12" (305mm)	6-1/8" (156mm)	3-7/8" (99mm)
KL45-4012-SE4	12" (305mm)	6-1/8" (156mm)	3-7/8" (99mm)

For a complete list of available options for KL45-4000 Series, see product configurator on reverse.

COMPLIES WITH:
 ASME A112.18.1-2005
 CSA B125.1-05
 NSF/ANSI 61/9, ANNEX G
 SECTION 116875 OF THE
 CALIFORNIA HEALTH & SAFETY CODE
 (COMMONLY KNOWN AS AB1953)
 VERMONT ACT 193
 UNIFORM PLUMBING CODE



KL45-4xxx-SE4 Series



1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701
 Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110
www.encoreplumbing.com • www.componenthardware.com

Faucet Configuration for KL45-4000 Series

