

PROJECT NAME: _____

LOCATION: _____


SPECIFIER ITEM NO. _____ **QTY:** _____

ENCORE PART NO. _____

Encore[®] Low Lead Pre-Rinse
 Spray Valve Assembly

KL50-Y002 Series

KL50-Y002-065	.65gpm Faceplate
KL50-Y002-12	1.2gpm Faceplate
KL50-Y002-16	1.6gpm Faceplate

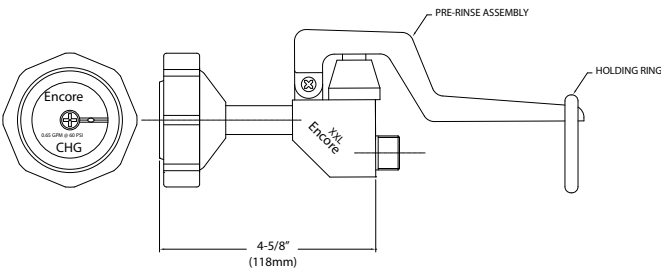

Dimensions shown in inches (mm) are for reference only and are subject to change.

1/2" NPSM Male Inlets
 Operating Temperature: 40-180°F (5-83°C)
 Operating Pressure: 15-125psi

Approximate shipping weight - 1 lb
 Warranty - 2 years parts

Heavy duty pre-rinse assembly designed to withstand demands of foodservice operations

Commercial Quality Features

- Polished chrome plated brass spray valve
- Ergonomic handle fits comfortably even in small hands; easy to use
- Non-marring, dish sensitive impact resistant bumper
- Reinforced thermoplastic face plate prevents flexing, bumper wear

SANIGUARD[®] Product Protection

- Permanently incorporated on all touch points of Encore plumbing fixtures
- Inorganic, silver ion technology inhibits growth of common bacteria, yeasts, mold and fungi, minimizes cross-contamination

Specifications:

Pre-rinse spray valve assembly to be Encore KL50-Y002 Series in the following configuration:

- ___ KL50-Y002-065 .65gpm* Faceplate
- ___ KL50-Y002-12 1.2gpm* Faceplate
- ___ KL50-Y002-16 1.6gpm* Faceplate

Spray valve assembly to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. Handle to be incorporated with SANIGUARD treatment and includes hold-open ring. Non-marring, dish sensitive, impact resistant bumper provides a positive, non-leaking seal made from a heat resistant material that will not fatigue under extreme operating temperatures. Reinforced thermoplastic face plate prevents flexing and premature bumper wear. Faceplate has a solid stream spray pattern.

Note: All flow rates are @ 60psi.

COMPLIES WITH:
 THE FEDERAL "REDUCTION OF LEAD
 IN DRINKING WATER ACT" -
 2011 - US SENATE BILL NO. S.3874
 NSF/ANSI 61/9, ANNEX G

