

PROJECT NAME: _____

LOCATION: _____


SPECIFIER ITEM NO. _____ **QTY:** _____

ENCORE PART NO. _____

Encore[®] Deck Mount Double Pantry Faucet with Adjustable Gooseneck Spout and Cross Handles

KL51-9x0x-SE2 Series

- KL51-9100-SE2 3" Spout, Ceramic Valves
- KL51-9000-SE2 3" Spout, Compression Valves
- KL51-9102-SE2 6" Spout, Ceramic Valves
- KL51-9002-SE2 6" Spout, Compression Valves
- KL51-9101-SE2 8" Spout, Ceramic Valves
- KL51-9001-SE2 8" Spout, Compression Valves

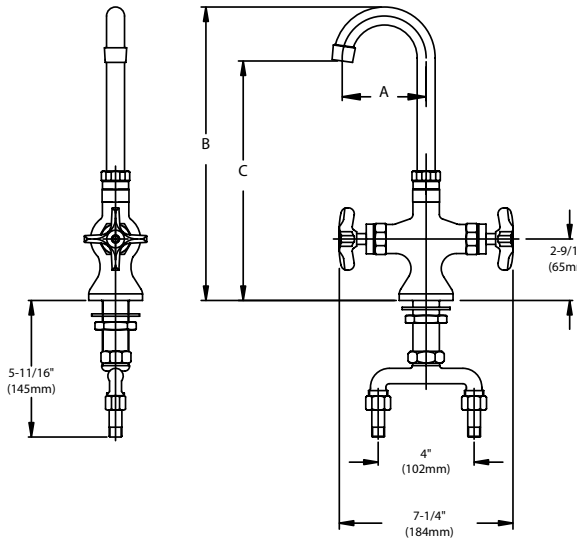

Dimensions shown in inches (mm) are for reference only and are subject to change.

1/2" NPSM Male Inlets
 Operating Temperature: 40 - 180°F (5 - 83°C)
 Operating Pressure: 15 - 125psi
 1-1/4" (32mm) hole for double pantry is recommended.

Approximate shipping weight - 7 lbs
 Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality

Commercial Quality Features

- Adjustable gooseneck spout design
- Cross handles
- Built-in check valve to prevent cross-flow and back-flow
- Leak proof double O-ring spout design
- Stainless steel spout

SANIGUARD[®] Product Protection

- Permanently incorporated on all touch points of Encore plumbing fixtures
- Inorganic, silver ion technology inhibits growth of common bacteria, yeasts, mold and fungi, minimizes cross-contamination

SPECIFICATIONS:

Deck Mount Double Pantry Faucet to be Encore KL51 Series in the following configuration:

- _____ KL51-9100-SE2 3" Spout, Ceramic Valves
- _____ KL51-9000-SE2 3" Spout, Compression Valves
- _____ KL51-9102-SE2 6" Spout, Ceramic Valves
- _____ KL51-9002-SE2 6" Spout, Compression Valves
- _____ KL51-9101-SE2 8" Spout, Ceramic Valves
- _____ KL51-9001-SE2 8" Spout, Compression Valves

Faucet body to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. Cross handles to be incorporated with SANIGUARD treatment. Color coded temperature indexes shall meet international standards. Valves to be 1/4-turn with integral check valve to prevent cross-flow and back-flow. Spout to be stainless steel adjustable gooseneck. 2.2gpm aerator @ 60psi standard with full flow stream bubbler screen spout tip.

Model No.	A	B	C
KL51-9100-SE2	3-1/2" (89mm)	11-7/8" (300mm)	9-1/4" (235mm)
KL51-9000-SE2	3-1/2" (89mm)	11-7/8" (300mm)	9-1/4" (235mm)
KL51-9102-SE2	6" (152mm)	12-3/4" (320mm)	9" (230mm)
KL51-9002-SE2	6" (152mm)	12-3/4" (320mm)	9" (230mm)
KL51-9101-SE2	8" (203mm)	18-1/4" (464mm)	12-1/2" (318mm)
KL51-9001-SE2	8" (203mm)	18-1/4" (464mm)	12-1/2" (318mm)

COMPLIES WITH:
 THE FEDERAL "REDUCTION OF LEAD IN DRINKING WATER ACT" - 2011 - US SENATE BILL NO. S.3874
 NSF/ANSI 61/9, ANNEX G

