

**PROJECT NAME:** \_\_\_\_\_

**LOCATION:** \_\_\_\_\_


**SPECIFIER ITEM NO.** \_\_\_\_\_ **QTY:** \_\_\_\_\_

**ENCORE PART NO.** \_\_\_\_\_

Encore<sup>®</sup> Deck Mount Double Pantry Faucet with Straight Swing Spout and Lever Handles

**KL51-9xxx-SE1 Series**

- KL51-9106-SE1 6" Spout, Ceramic Valves
- KL51-9006-SE1 6" Spout, Compression Valves
- KL51-9108-SE1 8" Spout, Ceramic Valves
- KL51-9008-SE1 8" Spout, Compression Valves
- KL51-9110-SE1 10" Spout, Ceramic Valves
- KL51-9010-SE1 10" Spout, Compression Valves
- KL51-9112-SE1 12" Spout, Ceramic Valves
- KL51-9012-SE1 12" Spout, Compression Valves
- KL51-9114-SE1 14" Spout, Ceramic Valves
- KL51-9014-SE1 14" Spout, Compression Valves
- KL51-9116-SE1 16" Spout, Ceramic Valves
- KL51-9016-SE1 16" Spout, Compression Valves

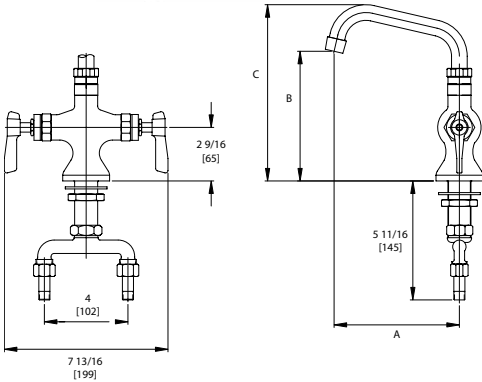

Dimensions shown in inches (mm) are for reference only and are subject to change.

1/2" NPSM Male Inlets  
Operating Temperature: 40 - 180°F (5 - 83°C)  
Operating Pressure: 15 - 125psi  
1-1/4" (32mm) hole for double pantry is recommended.

Approximate shipping weight - 6 lbs  
Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality

**Commercial Quality Features**

- Straight swing spout design
- ADA-compliant lever handles
- Built-in check valve to prevent cross-flow and back-flow
- Leak proof double O-ring spout design
- Stainless steel spout

**SANIGUARD<sup>®</sup> Product Protection**

- Permanently incorporated on all touch points of Encore plumbing fixtures
- Inorganic, silver ion technology inhibits growth of common bacteria, yeasts, mold and fungi, minimizes cross-contamination

**SPECIFICATIONS:**

Deck Mount Double Pantry Faucet to be Encore KL51 Series in the following configuration:

- \_\_\_\_\_ KL51-9106-SE1 6" Spout, Ceramic Valves
- \_\_\_\_\_ KL51-9006-SE1 6" Spout, Compression Valves
- \_\_\_\_\_ KL51-9108-SE1 8" Spout, Ceramic Valves
- \_\_\_\_\_ KL51-9008-SE1 8" Spout, Compression Valves
- \_\_\_\_\_ KL51-9110-SE1 10" Spout, Ceramic Valves
- \_\_\_\_\_ KL51-9010-SE1 10" Spout, Compression Valves
- \_\_\_\_\_ KL51-9112-SE1 12" Spout, Ceramic Valves
- \_\_\_\_\_ KL51-9012-SE1 12" Spout, Compression Valves
- \_\_\_\_\_ KL51-9114-SE1 14" Spout, Ceramic Valves
- \_\_\_\_\_ KL51-9014-SE1 14" Spout, Compression Valves
- \_\_\_\_\_ KL51-9116-SE1 16" Spout, Ceramic Valves
- \_\_\_\_\_ KL51-9016-SE1 16" Spout, Compression Valves

Faucet body to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. Lever handles to be incorporated with SANIGUARD treatment. Color coded temperature indexes shall meet international standards. Valves to be 1/4-turn with integral check valve to prevent cross-flow and back-flow. Spout to be stainless steel straight swing style design. 2.2gpm aerator @ 60psi standard with full flow stream bubbler screen spout tip.

| Model No.     | A           | B               | C                |
|---------------|-------------|-----------------|------------------|
| KL51-9106-SE1 | 6" (152mm)  | 6-1/16" (154mm) | 8-5/16" (211mm)  |
| KL51-9006-SE1 | 6" (152mm)  | 6-1/16" (154mm) | 8-5/16" (211mm)  |
| KL51-9108-SE1 | 8" (203mm)  | 6-9/16" (167mm) | 8-13/16" (224mm) |
| KL51-9008-SE1 | 8" (203mm)  | 6-9/16" (167mm) | 8-13/16" (224mm) |
| KL51-9110-SE1 | 10" (254mm) | 7" (178mm)      | 9-1/4" (235mm)   |
| KL51-9010-SE1 | 10" (254mm) | 7" (178mm)      | 9-1/4" (235mm)   |
| KL51-9112-SE1 | 12" (305mm) | 7-7/16" (189mm) | 9-11/16" (246mm) |
| KL51-9012-SE1 | 12" (305mm) | 7-7/16" (189mm) | 9-11/16" (246mm) |
| KL51-9114-SE1 | 14" (356mm) | 7-7/8" (200mm)  | 10-1/8" (257mm)  |
| KL51-9014-SE1 | 14" (356mm) | 7-7/8" (200mm)  | 10-1/8" (257mm)  |
| KL51-9116-SE1 | 16" (406mm) | 8-5/16" (211mm) | 10-9/16" (268mm) |
| KL51-9016-SE1 | 16" (406mm) | 8-5/16" (211mm) | 10-9/16" (268mm) |



COMPLIES WITH:  
THE FEDERAL "REDUCTION OF LEAD IN DRINKING WATER ACT" -  
2011 - US SENATE BILL NO. S.3874  
NSF/ANSI 61/9, ANNEX G

