

PROJECT NAME: _____

LOCATION: _____


SPECIFIER ITEM NO. _____ **QTY:** _____

ENCORE PART NO. _____

Encore[®] Deck Mount Double Pantry Faucet with Adjustable Gooseneck Spout and 4" (102mm) Wrist Blade Handles

KL51-9x0x-SE4 Series

| | |
|---------------|------------------------------|
| KL51-9100-SE4 | 3" Spout, Ceramic Valves |
| KL51-9000-SE4 | 3" Spout, Compression Valves |
| KL51-9102-SE4 | 6" Spout, Ceramic Valves |
| KL51-9002-SE4 | 6" Spout, Compression Valves |
| KL51-9101-SE4 | 8" Spout, Ceramic Valves |
| KL51-9001-SE4 | 8" Spout, Compression Valves |

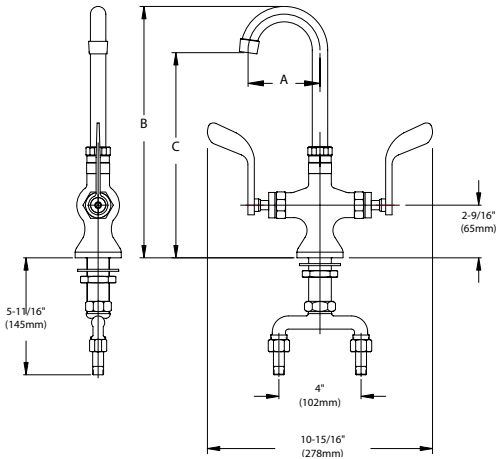

Dimensions shown in inches (mm) are for reference only and are subject to change.

1/2" NPSM Male Inlets
Operating Temperature: 40 - 180°F (5 - 83°C)
Operating Pressure: 15 - 125psi
1-1/4" (32mm) hole for double pantry is recommended.

Approximate shipping weight - 7 lbs
Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality

Commercial Quality Features

- Adjustable gooseneck spout design
- ADA-compliant 4" (102mm) wrist blade handles
- Built-in check valve to prevent cross-flow and back-flow
- Leak proof double O-ring spout design
- Stainless steel spout

SANIGUARD[®] Product Protection

- Permanently incorporated on all touch points of Encore plumbing fixtures
- Inorganic, silver ion technology inhibits growth of common bacteria, yeasts, mold and fungi, minimizes cross-contamination

SPECIFICATIONS:

Deck Mount Double Pantry Faucet to be Encore KL51 Series in the following configuration:

| | | |
|-------|---------------|------------------------------|
| _____ | KL51-9100-SE4 | 3" Spout, Ceramic Valves |
| _____ | KL51-9000-SE4 | 3" Spout, Compression Valves |
| _____ | KL51-9102-SE4 | 6" Spout, Ceramic Valves |
| _____ | KL51-9002-SE4 | 6" Spout, Compression Valves |
| _____ | KL51-9101-SE4 | 8" Spout, Ceramic Valves |
| _____ | KL51-9001-SE4 | 8" Spout, Compression Valves |

Faucet body to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. 4" wrist blade handles to be incorporated with SANIGUARD treatment. Color coded temperature indexes shall meet international standards. Valves to be 1/4-turn with integral check valve to prevent cross-flow and back-flow. Spout to be stainless steel adjustable gooseneck. 2.2gpm aerator @ 60psi standard with full flow stream bubbler screen spout tip.

| Model No. | A | B | C |
|---------------|---------------|-----------------|-----------------|
| KL51-9100-SE4 | 3-1/2" (89mm) | 11-7/8" (300mm) | 9-1/4" (235mm) |
| KL51-9000-SE4 | 3-1/2" (89mm) | 11-7/8" (300mm) | 9-1/4" (235mm) |
| KL51-9102-SE4 | 6" (152mm) | 12-3/4" (320mm) | 9" (230mm) |
| KL51-9002-SE4 | 6" (152mm) | 12-3/4" (320mm) | 9" (230mm) |
| KL51-9101-SE4 | 8" (203mm) | 18-1/4" (464mm) | 12-1/2" (318mm) |
| KL51-9001-SE4 | 8" (203mm) | 18-1/4" (464mm) | 12-1/2" (318mm) |



COMPLIES WITH:
THE FEDERAL "REDUCTION OF LEAD IN DRINKING WATER ACT" -
2011 - US SENATE BILL NO. S.3874
NSF/ANSI 61/9, ANNEX G

