

PROJECT NAME: _____

LOCATION: _____


SPECIFIER ITEM NO. _____ **QTY:** _____

ENCORE PART NO. _____

Encore[®] Wall Mount Faucet with Adjustable Gooseneck Spout and Lever Handles

KL54-8x0x-SE1 Series

- KL54-8100-SE1 3" Spout, Ceramic Valves
- KL54-8000-SE1 3" Spout, Compression Valves
- KL54-8102-SE1 6" Spout, Ceramic Valves
- KL54-8002-SE1 6" Spout, Compression Valves
- KL54-8101-SE1 8" Spout, Ceramic Valves
- KL54-8001-SE1 8" Spout, Compression Valves

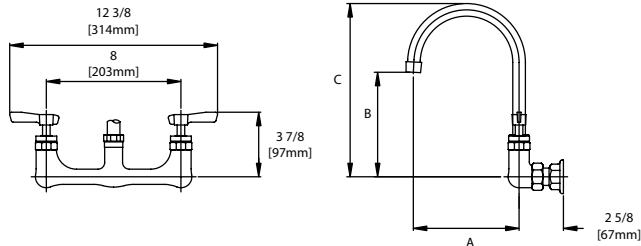

Dimensions shown in inches (mm) are for reference only and are subject to change.

1-1/2" (29mm) holes for backsplash are recommended to accommodate 1/2" supply nipples.

1/2" NPT Female Inlets

Operating Temperature: 40 - 180°F (5 - 83°C)

Operating Pressure: 15 - 125psi

Approximate shipping weight - 5 lbs

Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality

Commercial Quality Features

- Adjustable gooseneck spout design
- ADA-compliant lever handles
- Built-in check valve to prevent cross-flow and back-flow
- Leak proof double O-ring spout design
- Stainless steel spout

SANIGUARD[®] Product Protection

- Permanently incorporated on all touch points of Encore plumbing fixtures
- Inorganic, silver ion technology inhibits growth of common bacteria, yeasts, mold and fungi, minimizes cross-contamination

SPECIFICATIONS:

Wall Mount Faucet to be Encore KL54 Series in the following configuration:

- _____ KL54-8100-SE1 3" Spout, Ceramic Valves
- _____ KL54-8000-SE1 3" Spout, Compression Valves
- _____ KL54-8102-SE1 6" Spout, Ceramic Valves
- _____ KL54-8002-SE1 6" Spout, Compression Valves
- _____ KL54-8101-SE1 8" Spout, Ceramic Valves
- _____ KL54-8001-SE1 8" Spout, Compression Valves

Faucet body to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. Lever handles to be incorporated with SANIGUARD treatment. Valves to be 1/4-turn with integral check valve to prevent cross-flow and back-flow. Spout to be stainless steel adjustable gooseneck style with leak proof double O-ring seal design. Color coded temperature indexes shall meet international standards. 2.2gpm aerator @ 60psi standard with full flow stream bubbler screen spout tip.

Model No.	A	B	C
KL54-8100-SE1	3-1/2" (89mm)	9" (229mm)	6-3/4" (171mm)
KL54-8000-SE1	3-1/2" (89mm)	9" (229mm)	6-3/4" (171mm)
KL54-8102-SE1	6" (152mm)	12-7/16" (316mm)	8-3/4" (222mm)
KL54-8002-SE1	6" (152mm)	12-7/16" (316mm)	8-3/4" (222mm)
KL54-8101-SE1	8" (203mm)	15-1/4" (387mm)	9-1/2" (241mm)
KL54-8001-SE1	8" (203mm)	15-1/4" (387mm)	9-1/2" (241mm)



COMPLIES WITH:
THE FEDERAL "REDUCTION OF LEAD IN DRINKING WATER ACT" -
2011 - US SENATE BILL NO. S.3874
NSF/ANSI 61/9, ANNEX G

