

**PROJECT NAME:** \_\_\_\_\_

**LOCATION:** \_\_\_\_\_


**SPECIFIER ITEM NO.** \_\_\_\_\_ **QTY:** \_\_\_\_\_

**ENCORE PART NO.** \_\_\_\_\_

Encore<sup>®</sup> Wall Mount Faucet with Adjustable  
 Gooseneck Spout and Metering Handles

**KL54-820x-SE Series**

- KL54-8200-SE 3" Spout, Metering Valves
- KL54-8202-SE 6" Spout, Metering Valves
- KL54-8201-SE 8" Spout, Metering Valves

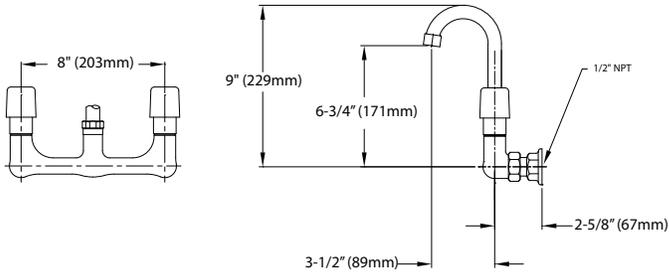

Dimensions shown in inches (mm) are for reference only and are subject to change.

1/2" NPT Female Inlets  
 Operating Temperature: 40 - 180°F (5 - 83°C)  
 Operating Pressure: 15 - 125psi  
 1-1/8" (29mm) holes for backsplash are recommended to accommodate 1/2" supply nipples.

Approximate shipping weight - 5 lbs  
 Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality

**Commercial Quality Features**

- Adjustable gooseneck spout design
- ADA-compliant metering handles
- Built-in check valve to prevent cross-flow and back-flow
- Leak proof double O-ring spout design
- Stainless steel spout

**SANIGUARD<sup>®</sup> Product Protection**

- Permanently incorporated on all touch points of Encore plumbing fixtures
- Inorganic, silver ion technology inhibits growth of common bacteria, yeasts, mold and fungi, minimizes cross-contamination

**SPECIFICATIONS:**

Wall Mount Faucet to be Encore KL54 Series in the following configuration:

- \_\_\_\_\_ KL54-8200-SE 3" Spout, Metering Valves
- \_\_\_\_\_ KL54-8202-SE 6" Spout, Metering Valves
- \_\_\_\_\_ KL54-8201-SE 8" Spout, Metering Valves

Faucet body to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. Metering handles to be incorporated with SANIGUARD treatment. Valves to be metering with an adjustable cycle time that is preset to 25 seconds @ 60 PSI. Spout to be stainless steel adjustable gooseneck style with leak proof double O-ring seal design. 2.2gpm aerator @ 60psi standard with full flow stream bubbler screen spout tip.

Model No.	A	B	C
KL54-8200-SE	3-1/2" (89mm)	9" (229mm)	6-3/4" (171mm)
KL54-8202-SE	6" (152mm)	12-7/16" (316mm)	8-3/4" (222mm)
KL54-8201-SE	8" (203mm)	15-1/4" (387mm)	9-1/2" (241mm)



COMPLIES WITH:  
 THE FEDERAL "REDUCTION OF LEAD  
 IN DRINKING WATER ACT" -  
 2011 - US SENATE BILL NO. S.3874  
 NSF/ANSI 61/9, ANNEX G

