

PROJECT NAME: _____

LOCATION: _____

SPECIFIER ITEM NO. _____ **QTY:** _____

ENCORE PART NO. _____

Encore[®] Low Lead 4" (102mm) Elevated Deck Mount Faucet with Double Jointed Swing Spout and Lever Handles

KL57-4x18

KL57-4018 Compression Valves
 KL57-4118 Ceramic Valves



1/2" NPSM Male Inlets
 Operating Temperature: 40-180°F (5-83°C)
 Operating Pressure: 15-125psi
 Note: 1-1/8" (29mm) holes for deck are recommended to accommodate 1/2" supply nipples

Approximate shipping weight - 6 lbs
 Warranty - 2 years parts

Solid heavy duty low lead cast body is specification and commercial quality.

Commercial Quality Features

- Double jointed tubular swing spout design
- ADA-compliant lever handles
- Built-in check valves to prevent cross-flow and back-flow
- Leak proof double O-ring spout design

SANIGUARD[®] Product Protection


- Permanently incorporated on all touch points of Encore plumbing fixtures
- Inorganic, silver ion technology inhibits growth of common bacteria, yeasts, mold and fungi, minimizes cross-contamination

SPECIFICATIONS:

Low Lead Deck Mount Faucet to be Encore KL57-4x18 Series in the following configuration:

_____ KL57-4018 Compression Valves
 _____ KL57-4118 Ceramic Valves

Faucet body to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. Handles to be lever and incorporated with SANIGUARD product protection. Supply inlets to be 4" on center. Valves to be 1/4-turn with integral check valve to prevent cross-flow and back-flow. Spout to be double jointed tubular swing style with leak proof double O-ring seal design. Color coded temperature indexes shall meet international standards. 2.2gpm aerator @ 60psi standard with full flow stream bubbler screen spout tip.

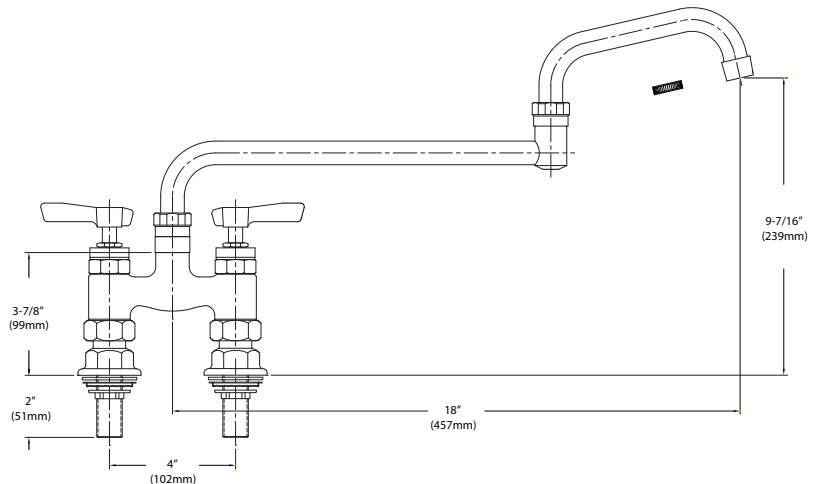

Dimensions shown in inches (mm) are for reference only and are subject to change.

COMPLIES WITH:
 ASME A112.18.1-2005
 CSA B125.1-05
 NSF/ANSI 61/9, ANNEX G
 SECTION 116875 OF THE
 CALIFORNIA HEALTH & SAFETY CODE
 (COMMONLY KNOWN AS AB1953)
 VERMONT ACT 193
 UNIFORM PLUMBING CODE

