

PROJECT NAME: _____

LOCATION: _____


SPECIFIER ITEM NO. _____ **QTY:** _____

ENCORE PART NO. _____

Encore[®] 8" Deck Mount Faucet with Adjustable Gooseneck Spout & 4" (102mm) Wrist Blade Handles

KL61-8x0x-SE4 Series

KL61-8100-SE4	3" Spout, Ceramic Valves
KL61-8000-SE4	3" Spout, Compression Valves
KL61-8102-SE4	6" Spout, Ceramic Valves
KL61-8002-SE4	6" Spout, Compression Valves
KL61-8101-SE4	8" Spout, Ceramic Valves
KL61-8001-SE4	8" Spout, Compression Valves

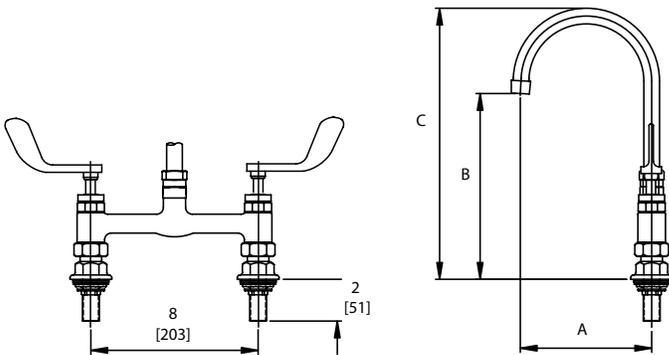

Dimensions shown in inches (mm) are for reference only and are subject to change.

1-1/8" (29mm) hole for deck are recommended to accommodate 1/2" supply nipples.

1/2" NPSM Male Inlets

Operating Temperature: 40-180°F (5-83°C)

Operating Pressure: 15-125psi

Approximate shipping weight - 5 lbs

Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality

Commercial Quality Features

- Adjustable gooseneck spout design
- ADA-compliant 4" (102mm) wrist blade handles
- Built-in check valve to prevent cross-flow and back-flow
- Leak proof double O-ring spout design
- Stainless steel spout

SANIGUARD[®] Product Protection

- Permanently incorporated on all touch points of Encore plumbing fixtures
- Inorganic, silver ion technology inhibits growth of common bacteria, yeasts, mold and fungi, minimizes cross-contamination

SPECIFICATIONS:

8" Deck Mount Faucet to be Encore KL61 Series in the following configuration:

_____	KL61-8100-SE4	3" Spout, Ceramic Valves
_____	KL61-8000-SE4	3" Spout, Compression Valves
_____	KL61-8102-SE4	6" Spout, Ceramic Valves
_____	KL61-8002-SE4	6" Spout, Compression Valves
_____	KL61-8101-SE4	8" Spout, Ceramic Valves
_____	KL61-8001-SE4	8" Spout, Compression Valves

Faucet body to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. Faucet to have 8" adjustable inlet centers and wrist blade handles. Handles to be incorporated with SANIGUARD treatment. Color coded temperature indexes shall meet international standards. Valve to be 1/4-turn with integral check valve to prevent cross-flow and back-flow. Spout to be stainless steel adjustable gooseneck style with leak proof double O-ring seal design. 2.2gpm aerator @ 60psi standard with full flow stream bubbler screen spout tip.

Model No.	A	B	C
KL61-8100-SE4	3-1/2" (89mm)	9-3/8" (238mm)	11-5/8" (295mm)
KL61-8000-SE4	3-1/2" (89mm)	9-3/8" (238mm)	11-5/8" (295mm)
KL61-8102-SE4	6" (152mm)	11-3/8" (289mm)	15-1/16" (383mm)
KL61-8002-SE4	6" (152mm)	11-3/8" (289mm)	15-1/16" (383mm)
KL61-8101-SE4	8" (203mm)	12-1/8" (308mm)	17-7/8" (454mm)
KL61-8001-SE4	8" (203mm)	12-1/8" (308mm)	17-7/8" (454mm)

COMPLIES WITH:
THE FEDERAL "REDUCTION OF LEAD
IN DRINKING WATER ACT" -
2011 - US SENATE BILL NO. S.3874
NSF/ANSI 61/9, ANNEX G

