


Encore® 8" Deck Mount Faucet with
Double-Jointed Swing Spout & Lever Handles
KL61-8xxx-SE1 Series

- KL61-8018-SE1 18" Spout, Compression Valves
- KL61-8118-SE1 18" Spout, Ceramic Valves
- KL61-8024-SE1 24" Spout, Compression Valves
- KL61-8124-SE1 24" Spout, Ceramic Valves

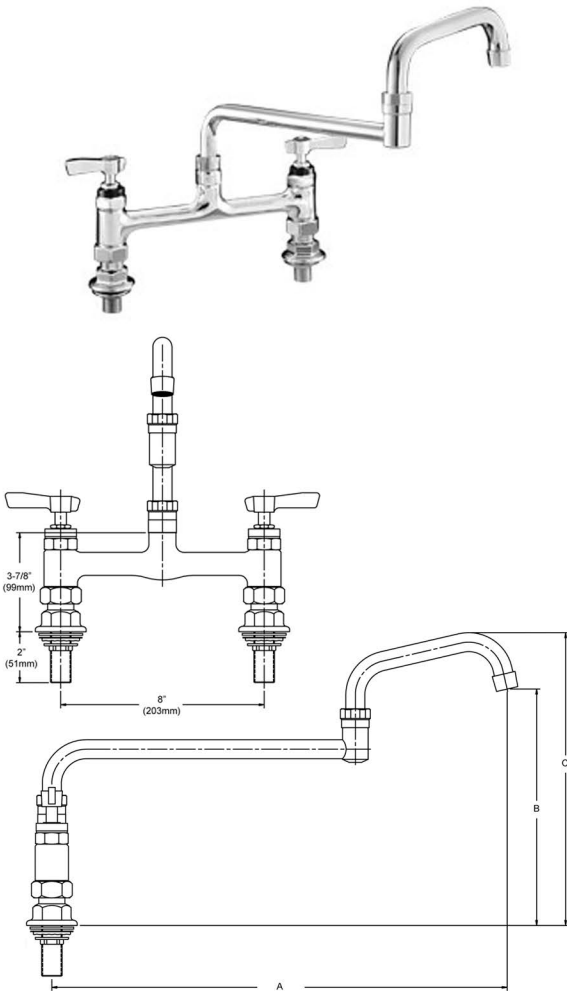

Dimensions shown in inches (mm) are for reference only and are subject to change.

1-1/8" (29mm) holes for deck are recommended to accommodate 1/2" supply nipples.

1/2" NPT Male Inlets

Operating Temperature: 40-180°F (5-83°C)

Operating Pressure: 15-125psi

Approximate shipping weight - 5 lbs
Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality

Commercial Quality Features

- Swivel tubular spout design
- ADA-compliant lever handles
- Built-in check valve to prevent cross-flow and back-flow
- Leak proof double O-ring spout design
- Stainless steel double-jointed spout

SANIGUARD® Product Protection

- Permanently incorporated on all touch points of Encore plumbing fixtures
- Inorganic, silver ion technology inhibits growth of common bacteria, yeasts, mold and fungi, minimizes cross-contamination

SPECIFICATIONS:

8" Deck Mount Faucet to be Encore KL61 Series in the following configuration:

- _____ KL61-8018-SE1 18" Spout, Compression Valves
- _____ KL61-8118-SE1 18" Spout, Ceramic Valves
- _____ KL61-8024-SE1 24" Spout, Compression Valves
- _____ KL61-8124-SE1 24" Spout, Ceramic Valves

Faucet body to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. Faucet to have 8" adjustable inlet centers and lever handles. Handles to be incorporated with SANIGUARD treatment. Color coded temperature indexes shall meet international standards. Valve to be 1/4-turn with integral check valve to prevent cross-flow and back-flow. Spout to be double-jointed stainless steel swivel style with leak proof double O-ring seal design. 2.2gpm aerator @60psi standard with full flow stream bubbler screen spout tip.

Model No.	A	B	C
KL61-8018-SE1	18" (457mm)	9-3/8" (238mm)	11-9/16" (294mm)
KL61-8118-SE1	18" (457mm)	9-3/8" (238mm)	11-9/16" (294mm)
KL61-8024-SE1	24" (610mm)	10-3/4" (273mm)	13" (330mm)
KL61-8124-SE1	24" (610mm)	10-3/4" (273mm)	13" (330mm)



COMPLIES WITH:
THE FEDERAL "REDUCTION OF LEAD
IN DRINKING WATER ACT" -
2011 - US SENATE BILL NO. S.3874

