

PROJECT NAME: _____

LOCATION: _____

SPECIFIER ITEM NO. _____ **QTY:** _____

ENCORE PART NO. _____

Encore® Single Deck Mount Pre-Rinse Assembly with Lever Handle

KL63-1000-xx(xx) Series

- KL63-1000 without wall bracket
- KL63-1000-BR with wall bracket (shown)
- KL63-1000BRMV with wall bracket & mixing valve



Approximate shipping weight - 10 lbs
 Warranty - 2 years parts

COMPLIES WITH:
 ASME A112.18.1-2005
 CSA B125.1-05
 NSF/ANSI 61/9, ANNEX G
 SECTION 116875 OF THE
 CALIFORNIA HEALTH & SAFETY CODE
 (COMMONLY KNOWN AS AB1953)
 VERMONT ACT 193
 UNIFORM PLUMBING CODE



Heavy duty pre-rinse assembly designed to withstand the demands of commercial operations. Standard unit is furnished with both a conventional pattern spray head as well as exclusive Encore water saver spray head.

Low-Flow Spray Valve

- 3 spray faces provided as standard - 3.3gpm Full Spray, 1.6gpm Flat Spray, and 1.2gpm Low-Flow Spray
- Spray head hook holds spray head away from work area when not in use
- Heat resistant, non-marring, impact resistant bumper will not fatigue under extreme operating temperatures

Encore Premium Hose Feature

- 3-ply nylon reinforced Santoprene® inner hose provides maximum durability
- Interlocking helical coils of stainless steel outer hose shroud protect inner hose
- Patented stainless steel strain relief spring transfers and distributes load stress to significantly improve hose life
- High pressure hydraulic fittings on hose ends tested to 400psi
- Washerless design incorporates temperature resistant o-rings to provide leak-proof seal on all hose assemblies and hose grips

Kool Grip™ Hose Grip

- Reduces heat transfer to the hand; stays up to 30 degrees cooler than competitors' grips
- Ergonomic spray handle fits comfortably in even small hands and is easy to use

SANIGUARD® Product Protection

- Permanently incorporated on all touch points of Encore plumbing fixtures
- Inorganic, silver ion technology inhibits growth of common bacteria, yeasts, mold and fungi, minimizes cross-contamination

SPECIFICATIONS:

Single Deck Mount Faucet to be Encore KL63-1000 in the following configuration:

- _____ KL63-1000 Without Wall Bracket
- _____ KL63-1000-BR With Wall Bracket
- _____ KL63-1000BRMV With Wall Bracket and Mixing Valve


Pre-rinse faucet body to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. Pre-rinse hose to be constructed of 3-ply nylon reinforced Santoprene® permanently secured with high pressure hydraulic fittings pressure tested to 400 psi. Hose to be of washerless, leak-proof design, protected by interlocking helical stainless steel coils for maximum protection and flexibility. Patented stainless steel strain relief spring transfers load stress. Heavy-duty ergonomic gooseneck spring ensures proper hose position. A patented wall bracket with compression fitting is provided with models KL63-1000-BR and KL63-1000BRMV to facilitate installation and give 360° of support. Riser to include spray head hook to hold spray head away from work area when not in use. Spray head to be furnished with 3 interchangeable spray faces—3.3gpm* Full Spray, 1.6gpm* Water Saver Spray, and 1.2gpm* Low Flow Energy Saver Spray. Spray assembly to be equipped with Kool Grip™ handle to reduce heat transfer to hand. All touch points to be permanently incorporated with SANIGUARD® anti-microbial product protection.

*All flow rates are @ 60psi

KL63-1000-xx(xx) Series

PREMIUM PLUMBING PRODUCTS
Encore[®]

1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701
Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110
www.encoreplumbing.com • www.componenthardware.com

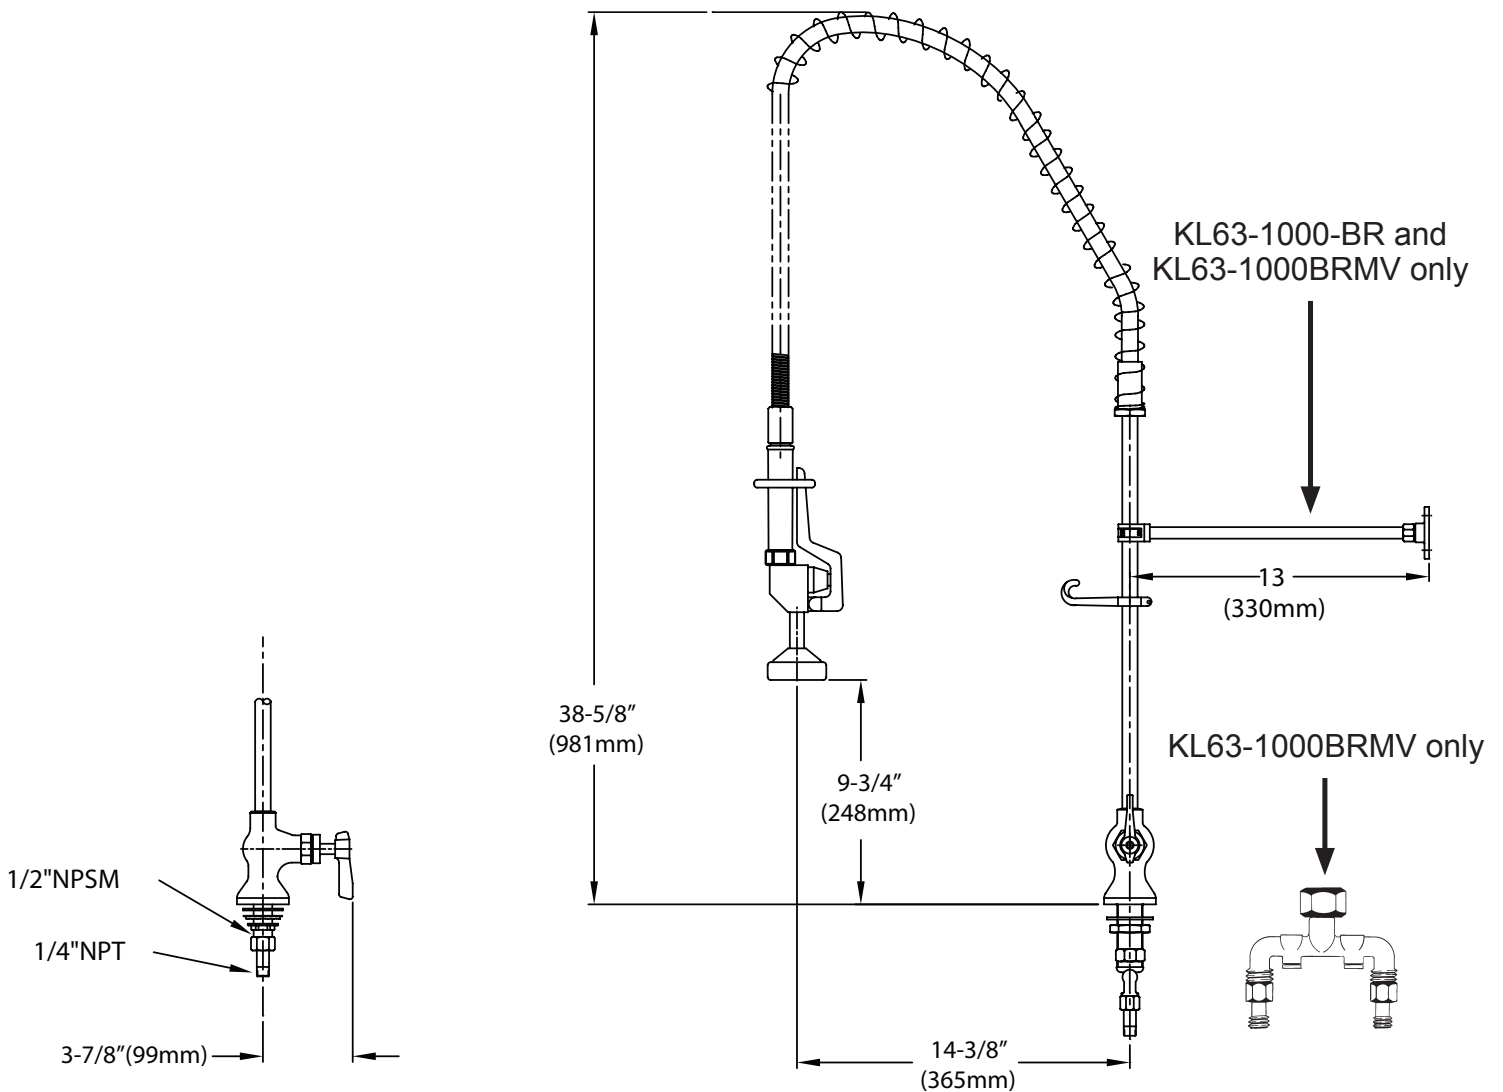

*Dimensions shown in inches (mm) are for reference only
and are subject to change.*

1-1/4" (32mm) hole for deck is recommended.
1/2" NPT Male Inlets w/ 1/4" NPT Compression Fittings
Operating Temperature: 40-180°F (5-83°C)
Operating Pressure: 15-125psi