

PROJECT NAME: _____

LOCATION: _____


SPECIFIER ITEM NO. _____ **QTY:** _____

ENCORE PART NO. _____

Encore[®] Deck Mount Single Pantry Faucet with Tubular Swing Spout and 4" (102mm) Wrist Blade Handle

KL64-9xxx-SE4 Series

- KL64-9106-SE4 6" Spout, Ceramic Valves
- KL64-9006-SE4 6" Spout, Compression Valves
- KL64-9108-SE4 8" Spout, Ceramic Valves
- KL64-9008-SE4 8" Spout, Compression Valves
- KL64-9110-SE4 10" Spout, Ceramic Valves
- KL64-9010-SE4 10" Spout, Compression Valves
- KL64-9112-SE4 12" Spout, Ceramic Valves
- KL64-9012-SE4 12" Spout, Compression Valves
- KL64-9114-SE4 14" Spout, Ceramic Valves
- KL64-9014-SE4 14" Spout, Compression Valves
- KL64-9116-SE4 16" Spout, Ceramic Valves
- KL64-9016-SE4 16" Spout, Compression Valves

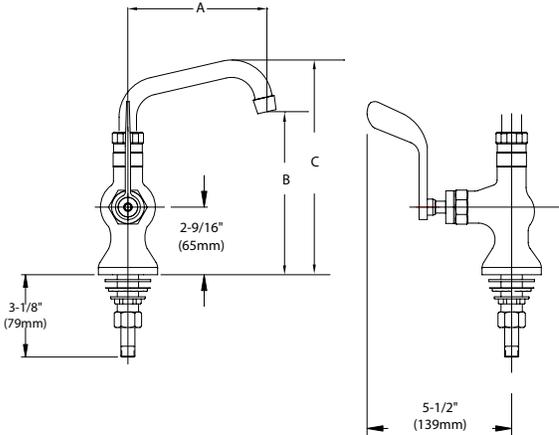

Dimensions shown in inches (mm) are for reference only and are subject to change.

1/2" NPSM Male Inlets
1/4" NPT Compression Fitting
Operating Temperature: 40-180°F (5-83°C)
Operating Pressure: 15-125psi
Note: 1-1/8" (29mm) hole for deck is recommended to accommodate 1/2" supply nipple.

Approximate shipping weight - 5 lbs
Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality

Commercial Quality Features

- Tubular swing spout design
- ADA-compliant 4" (102mm) wrist blade handle
- Built-in check valve to prevent cross-flow and back-flow
- Leak proof double O-ring spout design
- Stainless steel spout

SANIGUARD[®] Product Protection

- Permanently incorporated on all touch points of Encore plumbing fixtures
- Inorganic, silver ion technology inhibits growth of common bacteria, yeasts, mold and fungi, minimizes cross-contamination

SPECIFICATIONS:

Deck Mount Single Pantry Faucet to be Encore KL64 Series in the following configuration:

- _____ KL64-9106-SE4 6" Spout, Ceramic Valves
- _____ KL64-9006-SE4 6" Spout, Compression Valves
- _____ KL64-9108-SE4 8" Spout, Ceramic Valves
- _____ KL64-9008-SE4 8" Spout, Compression Valves
- _____ KL64-9110-SE4 10" Spout, Ceramic Valves
- _____ KL64-9010-SE4 10" Spout, Compression Valves
- _____ KL64-9112-SE4 12" Spout, Ceramic Valves
- _____ KL64-9012-SE4 12" Spout, Compression Valves
- _____ KL64-9114-SE4 14" Spout, Ceramic Valves
- _____ KL64-9014-SE4 14" Spout, Compression Valves
- _____ KL64-9116-SE4 16" Spout, Ceramic Valves
- _____ KL64-9016-SE4 16" Spout, Compression Valves

Faucet body to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. 4" wrist blade handle to be incorporated with SANIGUARD treatment. Valve to be 1/4-turn with integral check valve to prevent cross-flow and back-flow. Spout to be stainless steel tubular swing style with leak proof double O-ring seal design. 2.2gpm aerator @ 60psi standard with full flow stream bubbler screen spout tip.

Model No.	A	B	C
KL64-9106-SE4	6" (152mm)	6-1/16" (154mm)	8-5/16" (211mm)
KL64-9006-SE4	6" (152mm)	6-1/16" (154mm)	8-5/16" (211mm)
KL64-9108-SE4	8" (203mm)	6-9/16" (167mm)	8-13/16" (224mm)
KL64-9008-SE4	8" (203mm)	6-9/16" (167mm)	8-13/16" (224mm)
KL64-9110-SE4	10" (254mm)	7" (179mm)	9-1/4" (235mm)
KL64-9010-SE4	10" (254mm)	7" (179mm)	9-1/4" (235mm)
KL64-9112-SE4	12" (305mm)	7-7/16" (189mm)	9-11/16" (246mm)
KL64-9012-SE4	12" (305mm)	7-7/16" (189mm)	9-11/16" (246mm)
KL64-9114-SE4	14" (356mm)	7-7/8" (200mm)	10-1/8" (257mm)
KL64-9014-SE4	14" (356mm)	7-7/8" (200mm)	10-1/8" (257mm)
KL64-9116-SE4	16" (406mm)	8-5/16" (211mm)	10-9/16" (268mm)
KL64-9016-SE4	16" (406mm)	8-5/16" (211mm)	10-9/16" (268mm)

COMPLIES WITH:
ASME A112.18.1-2005
CSA B125.1-05
NSF/ANSI 61/9, ANNEX G
SECTION 116875 OF THE
CALIFORNIA HEALTH & SAFETY CODE
(COMMONLY KNOWN AS AB1953)
VERMONT ACT 193
UNIFORM PLUMBING CODE

