

1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701 Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110 www.encoreplumbing.com • www.componenthardware.com

PROJECT NAME:	
LOCATION:	
SPECIFIER ITEM NO	QTY:
ENCORE PART NO	

Solid heavy duty cast body is specification and commercial quality

· Permanently incorporated on all touch points of Encore plumbing fixtures

· Inorganic, silver ion technology inhibits growth of common bacteria, yeasts,

6" Spout, Ceramic Valves

8" Spout, Ceramic Valves

6" Spout, Compression Valves

8" Spout, Compression Valves Faucet body to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. 4" wrist blade handle to be incorporated with SANIGUARD treatment. Valve to be 1/4-turn with integral check valve to prevent cross-flow and back-flow. Spout to be swivel cast style with leak proof double O-ring seal design. 2.2gpm aerator @ 60psi

**Commercial Quality Features** 

· ADA-compliant 4" (102mm) wrist blade handle

mold and fungi, minimizes cross-contamination

· Leak proof double O-ring spout design

SANIGUARD® Product Protection

· Built-in check valve to prevent cross-flow and back-flow

Deck Mount Single Pantry Faucet to be Encore KL64 Series

standard with full flow stream bubbler screen spout tip.

Α

6" (152mm)

6" (152mm)

8" (203mm)

8" (203mm)

· Swivel cast spout design

SPECIFICATIONS:

Model No.

KL64-9106-TE4

KL64-9006-TE4

KL64-9108-TE4

KL64-9008-TE4

in the following configuration: KL64-9106-TE4

KL64-9006-TE4

KL64-9108-TE4


KL64-9008-TE4

Encore<sup>®</sup> Deck Mount Single Pantry Faucet with Swivel Cast Spout and 4" (102mm) Wrist Blade Handle

## KL64-9x0x-TE4 Series

- 6" Spout, Ceramic Valves KL64-9106-TE4
- KL64-9006-TE4 6" Spout, Compression Valves
- KL64-9108-TE4
  - 8" Spout, Ceramic Valves 8" Spout, Compression Valves
- KL64-9008-TE4



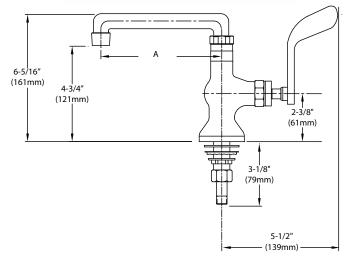

Dimensions shown in inches (mm) are for reference only and are subject to change.

1/2" NPSM Male Inlets 1/4" NPT Compression Fitting Operating Temperature: 40-180°F (5-83°C) Operating Pressure: 15-125psi Note: 1-1/8" (29mm) hole for deck is recommended to accommodate 1/2" supply nipple.

Approximate shipping weight - 5 lbs Warranty - 2 years parts

COMPLIES WITH: THE FEDERAL "REDUCTION OF LEAD IN DRINKING WATER ACT" – 2011 - US SENATE BILL NO. S.3874 NSF/ANSI 61/9, ANNEX G







Encore and SANIGUARD are registered trademarks of Component Hardware, registered in the US Specifications subject to change without notice © Component Hardware