

PROJECT NAME: \_\_\_\_\_

LOCATION: \_\_\_\_\_

SPECIFIER ITEM NO. \_\_\_\_\_ QTY: \_\_\_\_\_

ENCORE PART NO. \_\_\_\_\_

Encore<sup>®</sup> Deck Mount Elevated Bridge  
Pre-Rinse Assembly, 6" O.C.

**KL66 Series**

Model	Flow Rate	Valves	Spring	Wall Bracket
KL66-1000	1.6 gpm	Compression	Chrome Plated	None
KL66-1100	1.6 gpm	Ceramic	Chrome Plated	None
KL66-10L2	1.2 gpm	Compression	Chrome Plated	None
KL66-11L2	1.2 gpm	Ceramic	Chrome Plated	None
KL66-10L3	.65 gpm	Compression	Chrome Plated	None
KL66-11L3	.65 gpm	Ceramic	Chrome Plated	None
KL66-1000-S	1.6 gpm	Compression	Stainless Steel	None
KL66-1100-S	1.6 gpm	Ceramic	Stainless Steel	None
KL66-10L2-S	1.2 gpm	Compression	Stainless Steel	None
KL66-11L2-S	1.2 gpm	Ceramic	Stainless Steel	None
KL66-10L3-S	.65 gpm	Compression	Stainless Steel	None
KL66-11L3-S	.65 gpm	Ceramic	Stainless Steel	None
KL66-1000-BR	1.6 gpm	Compression	Chrome Plated	Yes
KL66-1100-BR	1.6 gpm	Ceramic	Chrome Plated	Yes
KL66-10L2-BR	1.2 gpm	Compression	Chrome Plated	Yes
KL66-11L2-BR	1.2 gpm	Ceramic	Chrome Plated	Yes
KL66-10L3-BR	.65 gpm	Compression	Chrome Plated	Yes
KL66-11L3-BR	.65 gpm	Ceramic	Chrome Plated	Yes
KL66-1000-BS	1.6 gpm	Compression	Stainless Steel	Yes
KL66-1100-BS	1.6 gpm	Ceramic	Stainless Steel	Yes
KL66-10L2-BS	1.2 gpm	Compression	Stainless Steel	Yes
KL66-11L2-BS	1.2 gpm	Ceramic	Stainless Steel	Yes
KL66-10L3-BS	.65 gpm	Compression	Stainless Steel	Yes
KL66-11L3-BS	.65 gpm	Ceramic	Stainless Steel	Yes

**ADD-ON FAUCETS**

Model	Spout Length
KL55-7006	6" (152mm)
KL55-7008	8" (203mm)
KL55-7010	10" (254mm)
KL55-7012	12" (305mm)
KL55-7014	14" (356mm)
KL55-7016	16" (406mm)
KL55-7018*	18" (457mm)
KL55-7018ASE1	18" (457mm)
KL55-7024*	24" (610mm)

\*Double-jointed spout

Approximate shipping weight - 11 lbs  
Warranty - 2 years parts



**Low-Flow Spray Valve**

- 1.6gpm Flat Spray standard
- Spray head hook holds spray head away from work area when not in use
- Heat resistant, non-marring, impact resistant bumper will not fatigue under extreme operating temperatures

**Encore Premium Hose Feature**

- 3-ply nylon reinforced Santoprene<sup>®</sup> inner hose provides maximum durability
- Interlocking helical coils of stainless steel outer hose shroud protect inner hose
- Patented stainless steel strain relief spring transfers and distributes load stress to significantly improve hose life
- High pressure hydraulic fittings on hose ends tested to 400psi
- Washerless design incorporates temperature resistant O-rings to provide leak-proof seal on all hose assemblies and hose grips

**Kool Grip<sup>™</sup> Hose Grip**

- Reduces heat transfer to the hand; stays up to 30 degrees cooler than competitors' grips
- Ergonomic spray handle fits comfortably in even small hands and is easy to use

**SANIGUARD<sup>®</sup> Product Protection**

- Permanently incorporated on all touch points of Encore plumbing fixtures
- Inorganic, silver ion technology inhibits growth of common bacteria, yeasts, mold and fungi, minimizes cross-contamination

COMPLIES WITH:  
THE FEDERAL "REDUCTION OF LEAD  
IN DRINKING WATER ACT" -  
2011 - US SENATE BILL NO. S.3874  
NSF/ANSI 61/9, ANNEX G




# KL66 Series

## Deck Mount Elevated Bridge Pre-Rinse Assembly, 6" O.C.

PREMIUM PLUMBING PRODUCTS  
**Encore**<sup>®</sup>

1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701  
Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110  
[www.encoreplumbing.com](http://www.encoreplumbing.com) • [www.componenthardware.com](http://www.componenthardware.com)

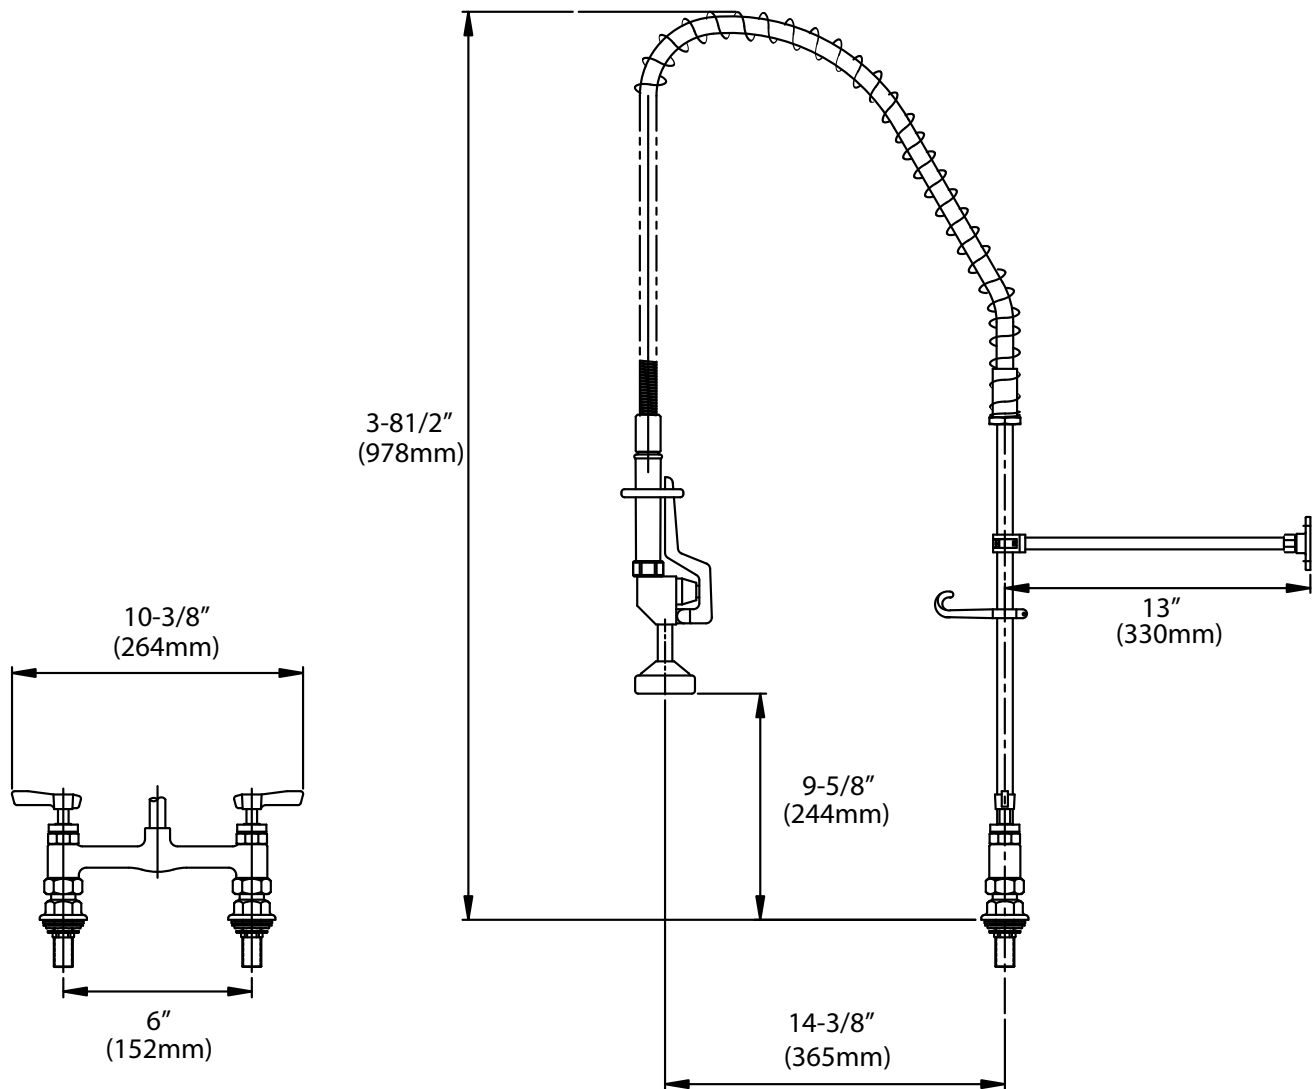

### SPECIFICATIONS:

Deck Mount Pre-Rinse Assembly to be Encore KL66 Series  
Model \_\_\_\_\_.

Pre-rinse body to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. Pre-rinse hose to be constructed of 3-ply nylon reinforced Santoprene<sup>®</sup> permanently secured with high pressure hydraulic fittings pressure tested to 400 psi. Hose to be of washerless, leak-proof design, protected by interlocking helical stainless steel coils for maximum protection and flexibility. Patented stainless steel strain relief spring transfers load stress. Heavy-duty ergonomic gooseneck spring ensures proper hose position. Riser to include spray head hook to hold spray head away from work area when not in use. Spray assembly to be equipped with Kool Grip<sup>™</sup> handle to reduce heat transfer to hand. All touch points to be permanently incorporated with SANIGUARD<sup>®</sup>.

1-1/2" (29mm) holes for deck are recommended to accommodate 1/2" supply nipples.

1/2" NPSM Male Inlets

Operating Temperature: 40-180°F (5-83°C)

Operating Pressure: 15-125psi