


Encore® Single Wall Mount Faucet with
18" Double Jointed Tubular Spout
with Pot Filler Valve

KL70-9x18-DP1 Series

KL70-9018-DP1 Compression Valve
KL70-9118-DP1 Ceramic Valve

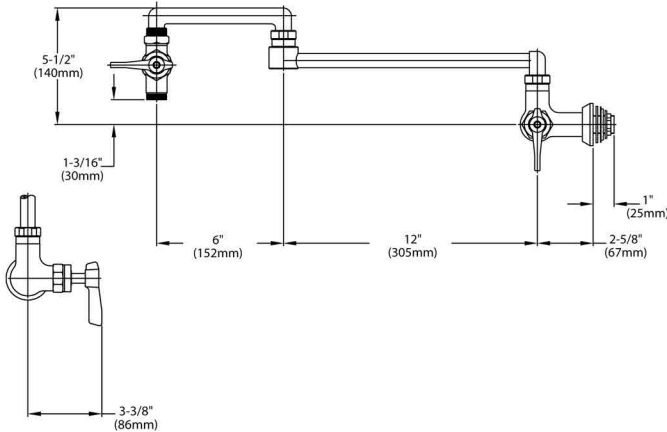

Dimensions shown in inches (mm) are for reference only and are subject to change.

1-1/8" (29mm) hole for wall is recommended to accommodate 1/2" supply nipple.
Operating Temperature: 40 -180°F (5 - 83°C)
Operating Pressure: 15 - 125psi

Approximate shipping weight - 5 lbs
Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality

Commercial Quality Features

- 18" (457mm) double jointed tubular spout design
- ADA-compliant single lever handle
- Cast spout
- Chrome plated pot filler valve

SANIGUARD® Product Protection

- Permanently incorporated on all touch points of Encore plumbing fixtures
- Inorganic, silver ion technology inhibits growth of common bacteria, yeasts, mold and fungi, minimizes cross-contamination

SPECIFICATIONS:

Wall Mount Faucet to be Encore KL70 Series in the following configuration:

___ KL70-9018-DP1 Compression Valve
___ KL70-9118-DP1 Ceramic Valve

Faucet body to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. Lever handle to be incorporated with SANIGUARD treatment. Valve to be 1/4-turn with integral check valve to prevent cross-flow and back-flow. Spout to be 18" double O-ring cast straight swing spout and extension. Unit is furnished with a polished chrome plated cast brass pot filler valve, where valve and handle are adjustable up to 180° (left or right). Lever handles are treated with SANIGUARD. Single hole wall mounted faucet mounting hardware includes 1/2" NPSM male inlets, base gasket with sealant recess and accommodates installations up to 1" (25mm) thick.



COMPLIES WITH:
THE FEDERAL "REDUCTION OF LEAD
IN DRINKING WATER ACT" -
2011 - US SENATE BILL NO. S.3874
NSF/ANSI 61/9, ANNEX G

