


## Encore® Single Wall Mount Faucet with Horizontal Tubular Swing Spout

### KL70-9xxx-SE1 Series

|               |                              |
|---------------|------------------------------|
| KL70-9006-SE1 | 6" Spout, Compression Valve  |
| KL70-9106-SE1 | 6" Spout, Ceramic Valve      |
| KL70-9008-SE1 | 8" Spout, Compression Valve  |
| KL70-9108-SE1 | 8" Spout, Ceramic Valve      |
| KL70-9010-SE1 | 10" Spout, Compression Valve |
| KL70-9110-SE1 | 10" Spout, Ceramic Valve     |
| KL70-9012-SE1 | 12" Spout, Compression Valve |
| KL70-9112-SE1 | 12" Spout, Ceramic Valve     |
| KL70-9014-SE1 | 14" Spout, Compression Valve |
| KL70-9114-SE1 | 14" Spout, Ceramic Valve     |
| KL70-9016-SE1 | 16" Spout, Compression Valve |
| KL70-9116-SE1 | 16" Spout, Ceramic Valve     |

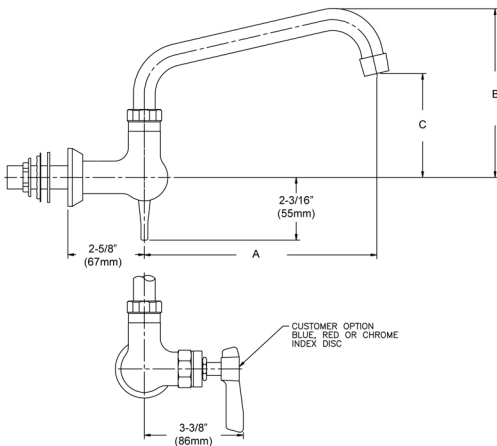

Dimensions shown in inches (mm) are for reference only and are subject to change.

1-1/8" (29mm) hole for wall is recommended to accommodate 1/2" supply nipple.  
 Operating Temperature: 40 -1 80°F (5 - 83°C)  
 Operating Pressure: 15 - 125psi

Approximate shipping weight - 5 lbs  
 Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality

#### Commercial Quality Features

- Horizontal tubular swing spout design
- ADA-compliant single lever handle
- Stainless steel spout

#### SANIGUARD® Product Protection

- Permanently incorporated on all touch points of Encore plumbing fixtures
- Inorganic, silver ion technology inhibits growth of common bacteria, yeasts, mold and fungi, minimizes cross-contamination

#### SPECIFICATIONS:

Wall Mount Faucet to be Encore KL70 Series in the following configuration:

|       |               |                              |
|-------|---------------|------------------------------|
| _____ | KL70-9006-SE1 | 6" Spout, Compression Valve  |
| _____ | KL70-9106-SE1 | 6" Spout, Ceramic Valve      |
| _____ | KL70-9008-SE1 | 8" Spout, Compression Valve  |
| _____ | KL70-9108-SE1 | 8" Spout, Ceramic Valve      |
| _____ | KL70-9010-SE1 | 10" Spout, Compression Valve |
| _____ | KL70-9110-SE1 | 10" Spout, Ceramic Valve     |
| _____ | KL70-9012-SE1 | 12" Spout, Compression Valve |
| _____ | KL70-9112-SE1 | 12" Spout, Ceramic Valve     |
| _____ | KL70-9014-SE1 | 14" Spout, Compression Valve |
| _____ | KL70-9114-SE1 | 14" Spout, Ceramic Valve     |
| _____ | KL70-9016-SE1 | 16" Spout, Compression Valve |
| _____ | KL70-9116-SE1 | 16" Spout, Ceramic Valve     |

Faucet body to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. Lever handle to be incorporated with SANIGUARD treatment. Valve to be 1/4-turn with integral check valve to prevent cross-flow and back-flow. Spout to be stainless steel horizontal tubular swing design. 2.2gpm aerator @60psi standard with full flow stream bubbler screen spout tip.



COMPLIES WITH:  
 THE FEDERAL "REDUCTION OF LEAD IN DRINKING WATER ACT" -  
 2011 - US SENATE BILL NO. S.3874  
 NSF/ANSI 61/9, ANNEX G

