

PROJECT NAME: _____

LOCATION: _____


SPECIFIER ITEM NO. _____ **QTY:** _____

ENCORE PART NO. _____

Encore[®] Wall Mount Spout Base with Horizontal Swing Spout

KL72-90xx Series

- KL72-9006 6" Spout,
- KL72-9008 8" Spout
- KL72-9010 10" Spout
- KL72-9012 12" Spout
- KL72-9014 14" Spout
- KL72-9016 16" Spout

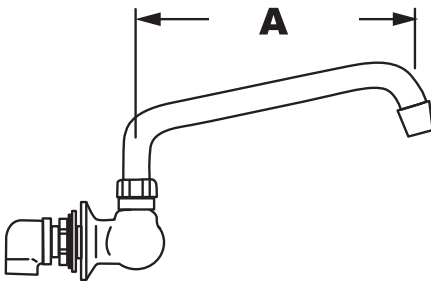

Dimensions shown in inches (mm) are for reference only and are subject to change.

1-1/8" (29mm) hole for backsplash is recommended to accommodate 1/2" supply nipple
 1/2" NPT Female Inlet
 Operating Temperature: 40-180°F (5-83°C)
 Operating Pressure: 15-125psi

Approximate shipping weight - 2 lbs
 Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality

Commercial Quality Features

- Tubular swing spout design
- Leak proof double O-ring spout design
- Stainless steel spout

SPECIFICATIONS:

Wall Mount Spout Base to be Encore KL72 Series in the following configuration:

- _____ KL72-9006 6" Spout
- _____ KL72-9008 8" Spout
- _____ KL72-9010 10" Spout,
- _____ KL72-9012 12" Spout
- _____ KL72-9014 14" Spout
- _____ KL72-9016 16" Spout

Faucet base to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. Spout to be stainless steel tubular swing style with leak proof double O-ring seal design. 2.2gpm aerator @ 60psi standard with full flow stream bubbler screen spout tip.

Model No.*	A
KL72-9006	6" (152mm)
KL72-9008	8" (203mm)
KL72-9010	10" (254mm)
KL72-9012	12" (305mm)
KL72-9014	14" (356mm)
KL72-9016	16" (406mm)

COMPLIES WITH:
 ASME A112.18.1-2005
 CSA B125.1-05
 NSF/ANSI 61/9, ANNEX G
 SECTION 116875 OF THE
 CALIFORNIA HEALTH & SAFETY CODE
 (COMMONLY KNOWN AS AB1953)
 VERMONT ACT 193
 UNIFORM PLUMBING CODE

