


**PROJECT NAME:** \_\_\_\_\_  
**LOCATION:** \_\_\_\_\_  
**SPECIFIER ITEM NO.** \_\_\_\_\_ **QTY:** \_\_\_\_\_  
**ENCORE PART NO.** \_\_\_\_\_

Encore® Deck Mount Utility Spray  
**KL73-2x00-xx Series**

KL73-2000 No vacuum breaker  
 KL73-2000-VB With vacuum breaker

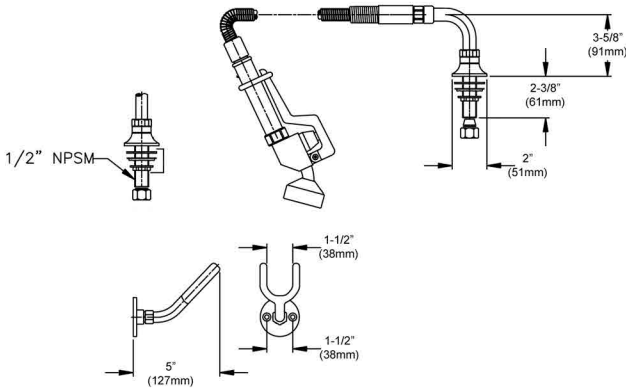

Dimensions shown in inches (mm) are for reference only and are subject to change.

1-1/8" (29mm) hole is recommended to accommodate 1/2" supply nipple.  
 1/2" NPT female inlet  
 Operating Temperature: 40-180°F (5-83°C)  
 Operating Pressure: 15-125psi

Approximate shipping weight - 5 lbs  
 Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality

**Commercial Quality Features**

- Provided with 3.3gpm, 1.6gpm and 1.2gpm spray faces
- 72" flexible S/S hose with Kool Grip™ handle

**SANIGUARD® Product Protection**

- Permanently incorporated on all touch points of Encore plumbing fixtures
- Inorganic, silver ion technology inhibits growth of common bacteria, yeasts, mold and fungi, minimizes cross-contamination

**SPECIFICATIONS:**

Deck Mount Utility Spray to be Encore KL73-2000 Series in the following configuration:

- \_\_\_\_\_ KL73-2000 No vacuum breaker
- \_\_\_\_\_ KL73-2000-VB With vacuum breaker

Faucet body to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. Hose to be 72" flexible stainless steel with Kool Grip™ handle. Hose to have Santoprene® reinforced inner hose. Hold open ring and hose wall hook to be included. Grip to be incorporated with SANIGUARD treatment.

**COMPLIES WITH:**  
 THE FEDERAL "REDUCTION OF LEAD IN DRINKING WATER ACT" – 2011 – US SENATE BILL NO. S.3874  
 NSF/ANSI 61/9, ANNEX G

