

PROJECT NAME: _____

LOCATION: _____


SPECIFIER ITEM NO. _____ **QTY:** _____

ENCORE PART NO. _____

Encore® Deck Mount Widespread Faucet with Rigid Gooseneck Spout and 4" (102mm) Wrist Blade Handles

KL84-8x0x-RE4 Series

- KL84-8100-RE4 3" Spout, Ceramic Valves
- KL84-8000-RE4 3" Spout, Compression Valves
- KL84-8101-RE4 8" Spout, Ceramic Valves
- KL84-8001-RE4 8" Spout, Compression Valves
- KL84-8102-RE4 6" Spout, Ceramic Valves
- KL84-8002-RE4 6" Spout, Compression Valves

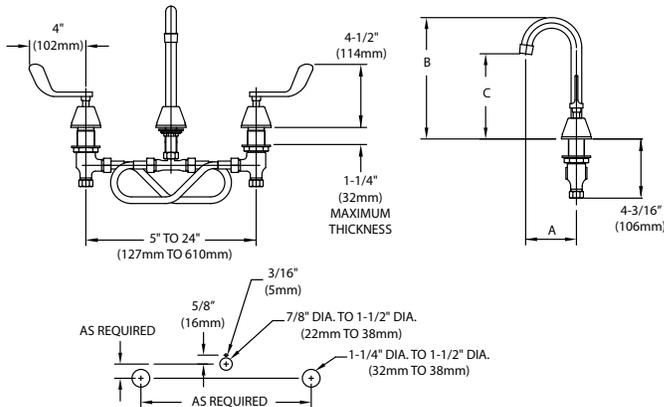

Dimensions shown in inches (mm) are for reference only and are subject to change.

1/2" NPSM Male Inlets with Compression Fittings
Operating Temperature: 40-180°F (5-83°C)
Operating Pressure: 15-125psi
1-1/8" (29mm) holes for deck are recommended to accommodate 1/2" supply nipple.

Approximate shipping weight - 8 lbs
Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality

Commercial Quality Features

- Rigid gooseneck spout design
- ADA-compliant 4" (102mm) wrist blade handles
- Built-in check valve to prevent cross-flow and back-flow
- Stainless steel spout

SANIGUARD® Product Protection

- Permanently incorporated on all touch points of Encore plumbing fixtures
- Inorganic, silver ion technology inhibits growth of common bacteria, yeasts, mold and fungi, minimizes cross-contamination

SPECIFICATIONS:

Deck Mount Faucet to be Encore KL84 Series in the following configuration:

- _____ KL84-8100-RE4 3" Spout, Ceramic Valves
- _____ KL84-8000-RE4 3" Spout, Compression Valves
- _____ KL84-8101-RE4 8" Spout, Ceramic Valves
- _____ KL84-8001-RE4 8" Spout, Compression Valves
- _____ KL84-8102-RE4 6" Spout, Ceramic Valves
- _____ KL84-8002-RE4 6" Spout, Compression Valves

Faucet body to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. Faucet to have 5"-12" adjustable inlet centers. Wrist blade handles to be incorporated with SANIGUARD treatment. Valves to be 1/4-turn with integral check valve to prevent cross-flow and back-flow. Spout to be stainless steel rigid gooseneck style. Color coded temperature indexes shall meet international standards. 2.2gpm aerator @ 60psi standard with full flow stream bubbler screen spout tip.

Model No.	A	B	C
KL84-8100-RE4	3-1/2" (89mm)	8-1/2" (216mm)	6" (152mm)
KL84-8000-RE4	3-1/2" (89mm)	8-1/2" (216mm)	6" (152mm)
KL84-8101-RE4	8-1/2" (216mm)	12-1/2" (317mm)	6-1/4" (159mm)
KL84-8001-RE4	8-1/2" (216mm)	12-1/2" (317mm)	6-1/4" (159mm)
KL84-8102-RE4	6" (152mm)	9-1/2" (241mm)	5-1/2" (140mm)
KL84-8002-RE4	6" (152mm)	9-1/2" (241mm)	5-1/2" (140mm)

COMPLIES WITH:
THE FEDERAL "REDUCTION OF LEAD IN DRINKING WATER ACT" -
2011 - US SENATE BILL NO. S.3874
NSF/ANSI 61/9, ANNEX G

