


Encore® Deck Mount Widespread Faucet with Swivel Bent Riser Spout and Metering Handles  
**KL8x-8208-BA Series**

KL84-8208-BA No Pop-Up Hole or Pop-Up  
KL86-8208-BA With Pop-Up Hole

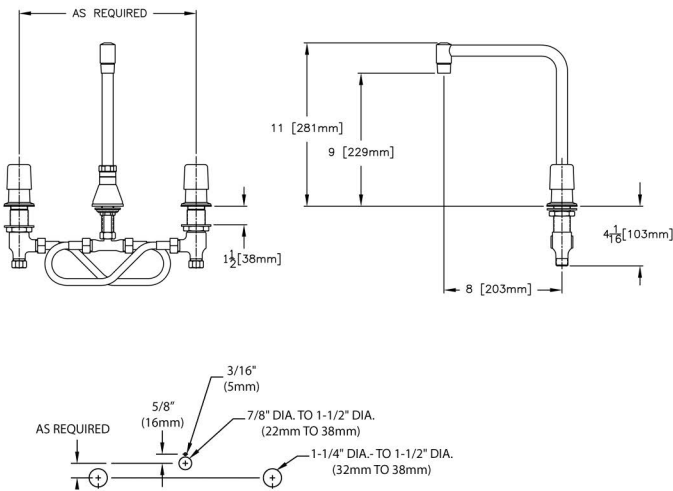

Dimensions shown in inches (mm) are for reference only and are subject to change.

1/2" NPSM Male Inlets with Compression Fittings  
Operating Temperature: 40-180°F (5-83°C)  
Operating Pressure: 20 - 125psi  
.25 gallons per cycle @60psi

Approximate shipping weight - 6 lbs  
Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality

**Commercial Quality Features**

- Swivel bent riser spout design
- ADA-compliant adjustable metering handles
- Stainless steel spout

**SANIGUARD® Product Protection**

- Permanently incorporated on all touch points of Encore plumbing fixtures
- Inorganic, silver ion technology inhibits growth of common bacteria, yeasts, mold and fungi, minimizes cross-contamination

**SPECIFICATIONS:**

Deck Mount Faucet to be Encore KL84 or KL86 Series in the following configuration:

- \_\_\_\_ KL84-8208-BA No Pop-Up Hole or Pop-Up  
\_\_\_\_ KL86-8208-BA With Pop-Up Hole

Faucet body to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. Faucet to have 5" - 12" adjustable inlet center. Spout to be of swivel bent riser design with 2.2gpm aerator @60psi with full flow stream bubbler spout tip. Adjustable metering valves to be set at .25 gallons per cycle at 60psi and to be treated with SANIGUARD antimicrobial product protection.

**COMPLIES WITH:**

ASME A112.18.1-2005  
CSA B125.1-05  
NSF/ANSI 61/9, ANNEX G  
SECTION 116875 OF THE  
CALIFORNIA HEALTH & SAFETY CODE  
(COMMONLY KNOWN AS AB1953)  
VERMONT ACT 193  
UNIFORM PLUMBING CODE

