

PROJECT NAME: _____


LOCATION: _____

SPECIFIER ITEM NO. _____ **QTY:** _____

ENCORE PART NO. _____

Encore[®] Stainless Steel Tubular Swing Spout
KS11-12-X0xx Series

- KS11-12-X006 6" Spout
- KS11-12-X008 8" Spout
- KS11-12-X010 10" Spout
- KS11-12-X012 12" Spout
- KS11-12-X014 14" Spout
- KS11-12-X016 16" Spout

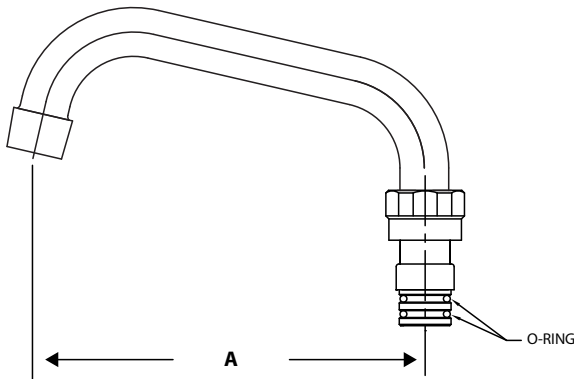

Dimensions shown in inches (mm) are for reference only and are subject to change.

Operating Temperature: 40 - 180°F (5 - 83°C)
 Operating Pressure: 15 - 125psi

Approximate shipping weight - 1 lb
 Warranty - 2 years parts

Solid heavy duty cast spout is specification and commercial quality

Commercial Quality Features

- Tubular swing spout design
- Leak proof double O-ring spout design

Model No.	A
KS11-12-X006	6" (152mm)
KS11-12-X008	8" (203mm)
KS11-12-X010	10" (254mm)
KS11-12-X012	12" (305mm)
KS11-12-X014	14" (356mm)
KS11-12-X016	16" (406mm)

COMPLIES WITH:
 ASME A112.18.1-2005
 CSA B125.1-05
 NSF/ANSI 61 / 9

