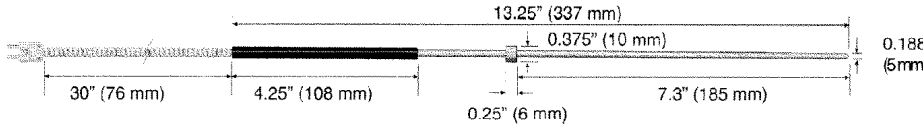
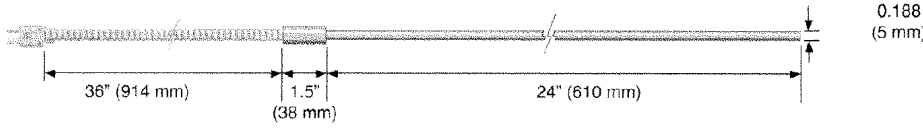
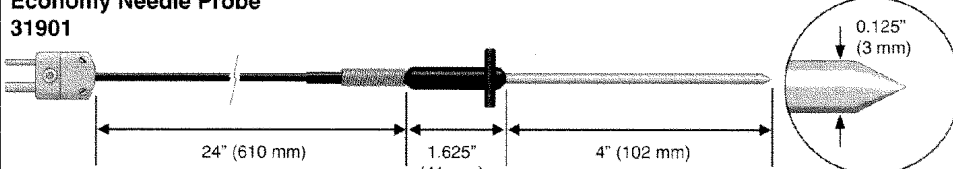


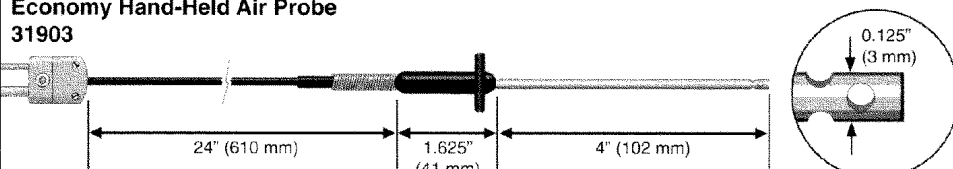
All measurements are stated in inches or feet followed by the metric equivalent in parentheses.

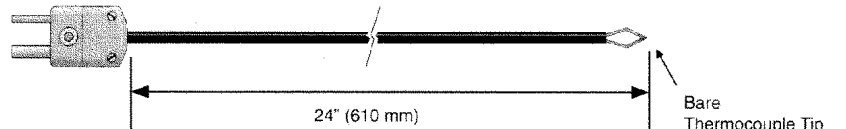
<p>Fry Vat Probe 50208</p> 	<p>Max Temp Tip: 400°F (205°C) Max Temp Cable: 400°F (205°C) Response Time: 11 seconds Flexible Armored Cable</p>	<p>Designed for immersion temperatures. Ideal for fryer or cooking vat temperatures.</p>
--	---	--

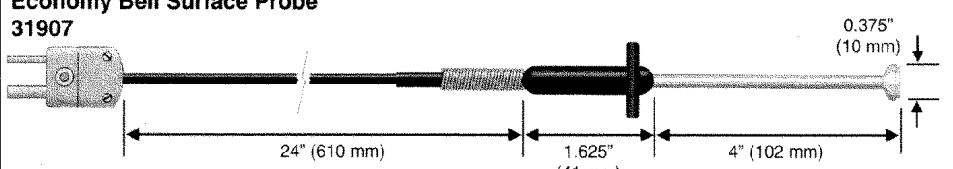
<p>High Temperature Probe 49140</p> 	<p>Max Temp Tip: 2,012°F (1100°C) Max Temp Cable: 400°F (205°C) Response Time: 30 seconds in 5 m/sec. air Flexible Armored Cable</p>	<p>High temperature probe for hot air or liquids.</p>
---	--	---

Economy Probe Line The following products were created to provide a line of economically priced temperature probes with the accuracy and durability of a thermocouple. They have been designed to accompany our Series 313 economy thermometer, but are compatible with any Type K thermocouple thermometer which accepts a standard mini connector. *This line is available only through distribution.* Contact Atkins for your nearest stocking distributor.


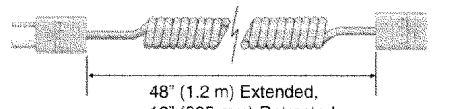
<p>Economy Needle Probe 31901</p> 	<p>Max Temp Tip: 400°F (205°C) Max Temp Handle: 300°F (149°C) Max Temp Cable: 400°F (205°C) Response Time: 6 seconds, liquids</p>	<p>Needle probe suitable for most insertion/immersion measurements.</p>
--	---	---

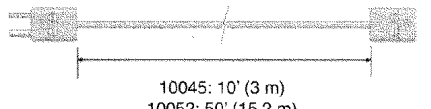
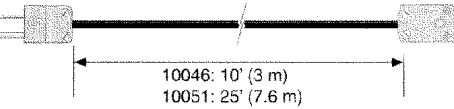
<p>Economy Hand-Held Air Probe 31903</p> 	<p>Max Temp Tip: 400°F (205°C) Max Temp Handle: 300°F (149°C) Max Temp Cable: 400°F (205°C) Response Time: 5 sec. in 5 m/sec. air</p>	<p>Hand-held air probe for ambient air temperatures.</p>
--	---	--

<p>Economy Bare Tip Probe 31905</p> 	<p>Max Temp Tip: 400°F (205°C) Max Temp Cable: 400°F (205°C) Response Time: 3 seconds, liquids; 9 sec. in 5 m/sec. air.</p>	<p>Bare tip probe for immersion or air temperatures.</p>
---	---	--

<p>Economy Bell Surface Probe 31907</p> 	<p>Max Temp Tip: 400°F (205°C) Max Temp Handle: 300°F (149°C) Max Temp Cable: 400°F (205°C) Response Time: 5 sec., oiled metals</p>	<p>Suitable for temperature measurements on any flat surface.</p>
--	---	---

Connectors and Extension Cables

<p>Miniature Thermocouple Connectors, In-Line, Female: 14002-F Male: 14002-M</p> 	<p>Extension Cable, Coiled Retractable Cable 10040</p> 	<p>Maximum Temp: 176°F (80°C)</p>
---	--	---------------------------------------

<p>Extension Cables, 20 Ga. PVC Jacket 10045 and 10052</p> 	<p>Maximum Temp: 221°F (105°C)</p>	<p>Extension Cables, Kevlar® Reinforced 10046 and 10051</p> 	<p>Maximum Temp: 400°F (205°C)</p>
---	--	---	--