



9319 Type K Prover

Now you can test and validate the calibration accuracy of your Type K Thermocouple Instrument. The 9319 Type K Thermocouple Prover generates a low voltage to simulate three preset (USDA Compliant) temperatures of 32°F, 100°F, or 160°F when plugged into the thermocouple instrument.

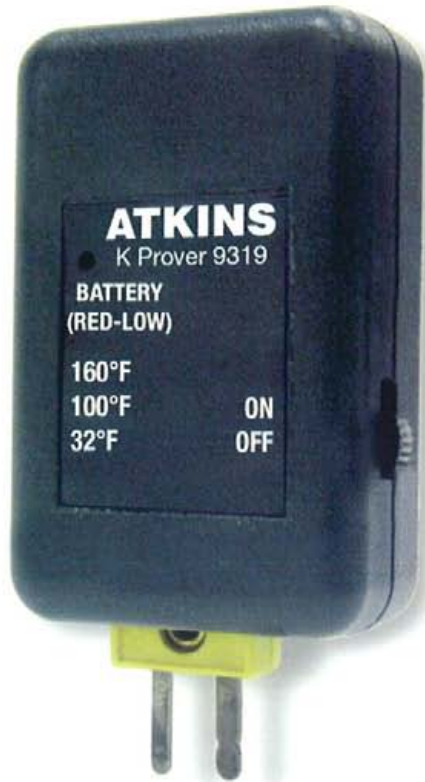

Specifications:

- Three output test points: 32°F, 100°F, and 160°F
 - Accuracy: $\pm 0.25^\circ\text{F}$
 - Ambient Conditions: 50° to 90°F, 90% RH (non-condensing)
 - This unit is calibrated to standards traceable to the National Institute of Standards and Technology (NIST)
 - Battery Type: CR2032, 3 Volt Lithium battery, included
 - Battery Life: 100 Hours minimum
 - Low battery indicator (LED)
 - 9319 Unit Weight: 1.6 oz. (45.7 grams)
 - 1 Year Warranty
-
- Individually Boxed Package Weight: 2.5 oz. (71.4 grams)
 - Package Dimensions: 4.25" x 3.75" x 1.5" (104 x 95 x 38 mm)
 - Package Cube: 0.01

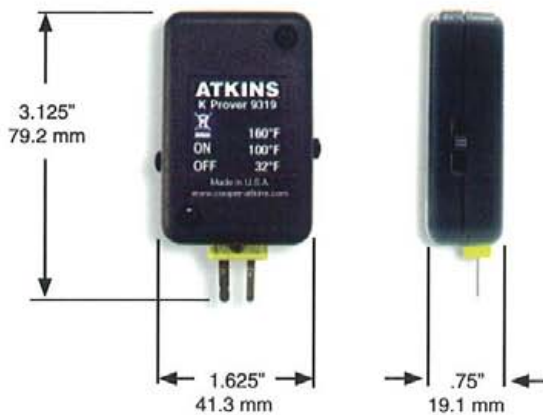

Committed to Innovation for Over 120 Years...

Cooper-Atkins Corporation • 800-835-5011 • 860-347-2256 • www.cooper-atkins.com