

JOB:	
ITEM NO:	

COOK-N-HOLD LOW TEMPERATURE RADIANT OVEN MODEL 1000-CH-SPLIT-D SERIES

FEATURES AND BENEFITS:

- Fully insulated Cook-N-Hold gentle radiant oven designed for flavorful results by slow cooking.
- Slow cooking means 15% to 20% less shrinkage.
- Efficient 3000 Watt power unit allows for reheating of prepared meals or bulk items. Maximum temperature 325° (163°C). Easy to read thermometer.
- Standard solid state electronic control with large, clean, easy-to-read and operate LED digital display to ensure holding at precise food temperatures.
- 18 factory or field programmed cook & hold cycles.
 Each programmed menu can be customized for exact time and temperature needs.
- Standard with probe cooking, includes one 6" food temperature probe.
- Cook and hold over 120 lbs. (54 kg.) of meat in just 5 sq. ft. of floor space.
- Non-venting oven, permitted by most local codes, provides easy, inexpensive installation.
- Fully insulated, stainless steel interior and exterior for ease of cleaning. Smooth interior coved corners prevent food particle/grease buildup. Aluminum exterior is also available.
- Oven is operable on either 208 or 240 Volt circuits at the flip of a switch.
- Field reversible insulated door prevents temperature loss.
 Silicone door gasket for proper seal. High temperature ceramic magnetic latch for "easy open" and security during transport.
- Safety conscious anti-microbial latch protect against spreading germs. Standard with right hand hinging; left hand hinging available upon request.
- Removable stainless steel pan slides hold eight (8) 18" x 26" pans on 3" centers.
 Supplied with 3 wire grids.
- Heavy duty 5" casters, two swivel with brakes, two rigid. Provides mobility when fully loaded.
- · Ovens can be stacked for flexibility.

POWER UNIT OPTIONS:

www.crescor.com

3000 Watts, 208/240 Volts, 1 Phase, 60 Hz. 3000 Watts, 208/240 Volts, 3 Phase, 60 Hz.



SILVER







1000-CH-SS-SPLIT-D



Standard solid state electronic control with large, clear, easy-to-read and operate LED digital display to ensure holding at precise food temperature

ACCESSORIES and OPTIONS (Available at extra cost):

- □ Tempered Glass Door Window
- Additional Probes
- ☐ Key Lock Latch
- Stacking Kit
- Extra Wire Grids
- Perimeter Bumper
- Corner Bumpers
- Various Caster Options
- ☐ 6" Legs

Silver indicates our

Mobile Equipment Stand


See page E-10 for accessory details.

2-Year Parts / 1-Year Labor
Warranty with Lifetime on heating elements (excludes labor)

Page E-7.1
Feb., 2014

1000-CH-SPLIT-D SERIES

6-20P

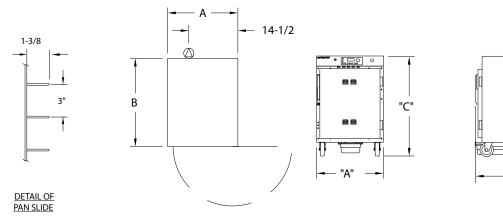

CRE	RES COR PAN		PAN		DIM "A"	DIM "B"	DIM "C"	INSIDE CLEAR DIMENSIONS*				WEIGHT
MOD	EL NO.	CAP	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		ACT.
1000-CH-AL-SPLIT-D 1000-CH-SS-SPLIT-D	8	18 X 26	IN	22-5/8	32-3/4	42	18-3/16	27	25	LBS	215	
		460 X 660	MM	575	835	1070	465	690	635	KG	98	
1000-CH-AL-SPLIT-STK-D 1000-CH-SS-SPLIT-STK-D	1 16	18 X 26	IN	22-5/8	32-3/4	77	18-3/16	27	25	LBS	430	
		460 X 660	MM	575	835	1960	465	690	635	KG	195	

^{*}Inside dimensions for each compartment.

CABINET:

- 1000-CH-AL-D Body: .063 Aluminum outer body.
- 1000-CH-SS-D Body: 22 ga. stainless steel outer body.
- Inner body & top: 18 ga. stainless steel.
- Reinforcement: Internal framework of 18 ga. stainless steel.
- Insulation: Fiberglass, thermal conductivity (K factor) is .23 at 75°F, 1-1/2" in walls, 1" in doors.
- Drip pan: 18 ga. stainless steel with drain; removable.
- Casters: 5" dia., modulus tires, 1-1/4 wide, load cap. 250 lbs. each, temp. range -45°/+180°F. Delrin bearings. Front swivel casters equipped with brakes; rigid casters on rear.

DOOR:

- · Field reversible.
- · Formed 20 ga. stainless steel.
- Latch: Anti-microbial chrome plated zinc with composite handle, ceramic magnetic type; mounted inboard.
- · Hinges (2): Heavy duty chrome plated zinc; mounted inboard
- · Gaskets: Perimeter type, silicone.
- · Adjustable vents.

PAN SLIDES (removable):

- 18 ga. stainless steel angles, 1 x 1-3/8; riveted on 3" centers.
- Grids: Stainless steel, 18 x 26; supplied with (3) grids.

CLEARANCE REQUIREMENTS:

• 3" (76mm) at the back, 2" (51mm) at the top, 1" (25mm) at both sides.

POWER REQUIREMENTS:

- 3000/2650 Watts, 208/240 Volts, 60 Hz., 1 phase, 20 Amp. Service 14 Amps at 208 Volts, 13 Amps at 240 Volts.
- 3000/2650 Watts, 208/240 Volts, 60 Hz., 3 phase, 20 Amp. Service 8 Amps at 208 Volts, 7 Amps at 240 Volts.

ELECTRICAL COMPARTMENT:

- · Control panel: Formed stainless steel; black front.
- Thermostats (cook/hold): Solid state digital display control, 140°F (60°C) to 325°F (163°C).
- Switch: ON-OFF push button type.
- · Probe: (1) 6". stainless steel.
- Power Cord: Permanent, 6 ft. 12/3 ga. with right angle plug.

"B'

- Three (3) heater circuits.
- · Thermometer: Digital display.
- Voltage selector switch: Change to 208 or 240 Volt; on back of oven.

INSTALLATION REQUIREMENTS:

· Check local vent hood codes for mobile Cook-N-Hold ovens.

SHORT FORM SPECIFICATIONS

listed.



5925 Heisley Road • Mentor, OH 44060-1833 Phone: 877/CRESCOR • Fax: 440/350-7267 www.crescor.com

© Crescent Metal Products, Inc. 2014 All rights reserved.

In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.