


SUPER DUTY ANGLE LEDGE UTILITY RACKS 207-SD SERIES

FEATURES AND BENEFITS:

- Super duty utility rack for transport and storage of products on 18" x 26" pans and 14" x 18" trays. Also available for 15" x 20" trays.
- Fully welded framework of structural aluminum extrusions for rigidity and durability. Reinforced for rough handling.
- Constructed of non-corrosive, Hi-Tensile aluminum for strength.
- Extruded angle ledge pan supports. Each is riveted and welded in place to withstand heavier loads. Bottom of pan or tray rests on angle ledges. See reverse side for capacity and pan spacing.
- Heavy duty 5" swivel casters, two with brakes. Provides mobility when fully loaded.

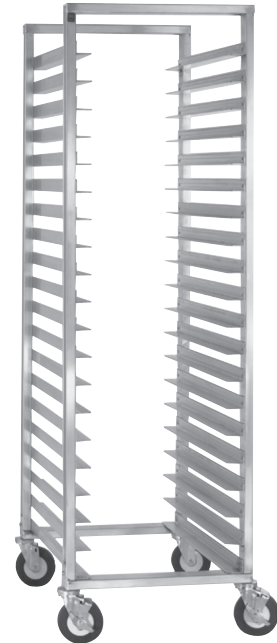

207-1820-SD




ACCESSORIES and OPTIONS (Available at extra cost):

- Pan Stop
- Corner Bumpers
- Vertical Bumpers
- Perimeter Bumper
- Rotary Bumpers (for use with 5" casters)
- Floor Lock (for use with 5" casters)
- Various Caster Options

See page G-36 for accessory details.



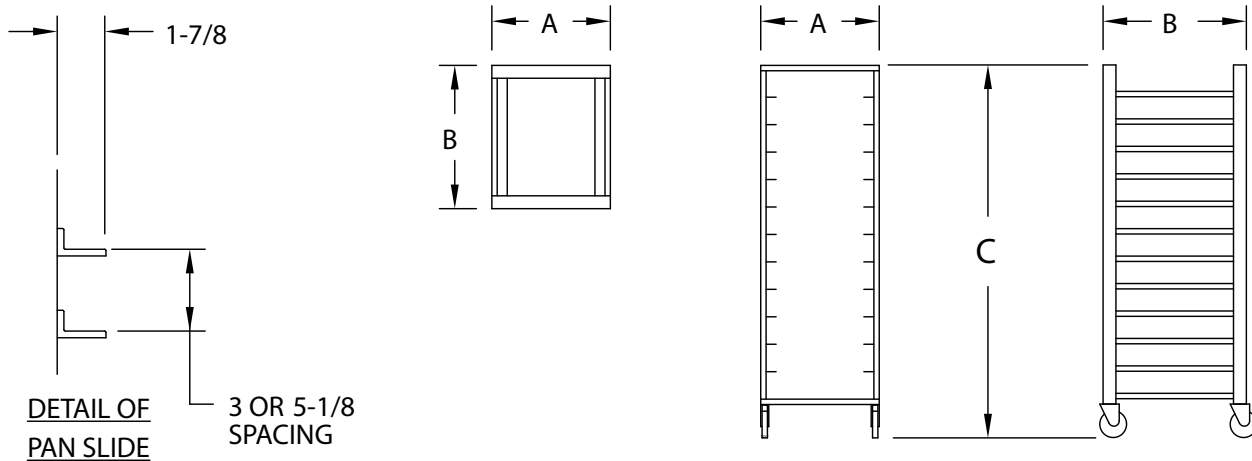

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS				WEIGHT ACT.
	CAP	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
207-1820-SD	20	18 x 26	IN	22-7/16	29-5/8	69-3/4	18-5/8	28-7/8	61-1/2	LBS	75
		460 x 660	MM	570	755	1775	475	735	1565	KG	34
207-1812-SD	12	18 x 26	IN	22-7/16	29-5/8	69-3/4	18-5/8	28-7/8	61-1/2	LBS	60
		460 x 660	MM	570	755	1775	475	735	1565	KG	27
207-1524-SD	24	15 x 20	IN	24-5/8	31	69-3/4	20-7/8	30-1/4	61-1/2	LBS	60
		385 x 510	MM	625	790	1775	530	770	1565	KG	27

When ordering bumpers, add 2" to overall dimensions.

ALL CONSTRUCTION IS RIVETED, WELDED AND FINISHED.



Gold indicates our Best Rack with the best warranty in the industry. 3-Year Parts / 1-Year Labor with lifetime guarantee against rust & corrosion

RACK:

- Posts: Extruded channels, 1-1/16 x 2 x .125.
- Top and bottom: Extruded channels, 1-1/16 x 2-3/8 x .188; welded to posts.
- Casters: 5" dia., swivel, modulus tires, 1-1/4 wide, load cap. 250 lbs. each, temp. range -45°/+180°F. Delrin bearings. Two casters equipped with brakes.

PAN SLIDES:

- Extruded angles, 1-7/16 x 1-7/8 x .102; riveted to posts.
- Pan spacing:
Models 207-1524-SD and 207-1812-SD: 5-1/8" centers.
Model 207-1820-SD: 3" centers.

SHORT FORM SPECIFICATIONS

Cres Cor Utility Rack Model 207-____-SD. Extruded aluminum welded construction with angles riveted. Capacity (____) ____ x ____ pans on (____) centers. 5" swivel modulus casters, Delrin bearings. Load capacity 250 lbs. each, temperature -45° to +180°F. 3-Year Parts / 1-Year Labor warranty. Lifetime guarantee against rust & corrosion. Provide the following accessories: _____. NSF listed.



5925 Heisley Road • Mentor, OH 44060-1833
Phone: 877/CRESCOR • Fax: 440/350-7267
www.crescor.com
© Crescent Metal Products, Inc. 2011 All rights reserved.

In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.