

CHANNEL SLIDE DOUBLE TRAY RACK MODEL 2213-1824B

FEATURES AND BENEFITS:

- Versatile double tray rack for transporting meal trays and bussing afterwards. Rack holds 14" x 18" trapezoid trays as well as 13" x 18", 14" x 18", and 18" x 26" standard pans.
- Racks can be enclosed on sides and back for use as an attractive tray return cart.
- Fully welded framework of structural aluminum extrusions for rigidity and durability.
- Constructed of non-corrosive, Hi-Tensile aluminum for strength.
- Special "sure-hold" extrusions, riveted in place on 5-1/8" centers, securely hold tray's to and bottom; will not tip even when pulled half way out.
- Heavy duty 5" swivel casters, two with brakes. Provides mobility when fully loaded.




2213-1824B





ACCESSORIES and OPTIONS (Available at extra cost):

- Top Enclosure
- Side Enclosure
- Back Enclosure
- Bottom Enclosure
- Pan Stops
- Push Handle
- Corner Bumpers
- Vertical Bumpers
- Perimeter Bumpers
- Rotary Bumpers (for use with 5" casters)
- Floor Lock (for use with 5" casters)
- Various Caster Options

See page G-36 for accessory details.

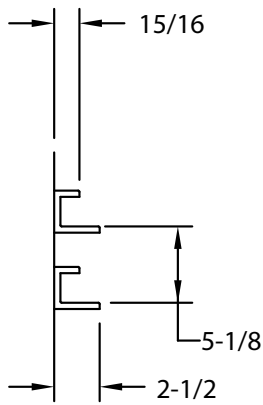

DETAIL OF PAN SLIDE

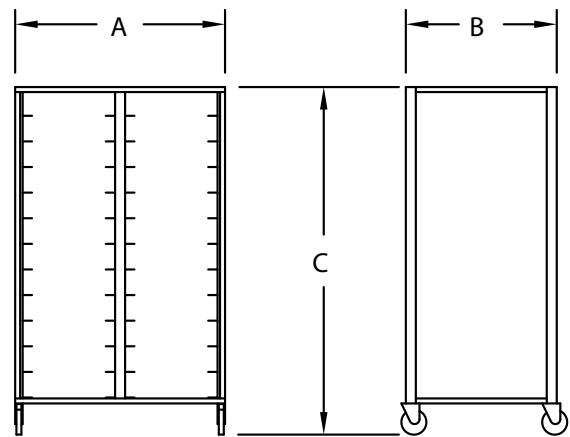

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS			WEIGHT ACT.	
	CAP	SIZE		WIDTH	DEPTH	HEIGHT	*WIDTH	DEPTH	HEIGHT		
2213-1824B	48	13 x 18	IN	42-3/16	30-1/4	69-9/16	18-3/4"	29-1/2	61-3/8	LBS	122
		330 x 460	MM	1075	770	1770	480	750	1560	KG	53
	48	14 x 18	IN								
		360 x 460	MM								
	24	18 x 26	IN								
		460 x 660	MM								
	48	Trapezoid 14 x 18	IN								
		360 x 460	MM								

- Notes: 1. *Inside width dimension for each compartment.
 2. When ordering bumpers, add 2" to overall dimensions.

ALL ALUMINUM CONSTRUCTION IS RIVETED, WELDED AND FINISHED.

RACK:

- Posts: Closed post extrusions, 1-1/16 x 2.
- Top and bottom: Extruded channels, 1-1/16 x 2-3/8 x .188; welded to posts.
- Casters: 5" dia., swivel, neoprene tires, 1-1/4 wide, load cap. 250 lbs. each, temp. range -45°/+180°F. Delrin bearings. Two casters equipped with brakes.

PAN SLIDES:

- Extruded channels, 15/16 x 1-7/16 x 2-1/2 x .100; riveted to posts on 5-1/8" centers.

SHORT FORM SPECIFICATIONS

Cres Cor Double Tray Tray Rack Model 2213-1824B. Extruded aluminum welded construction with no-tip "C" type channel slides riveted on 5-1/8" centers. Capacity (48) 14" x 18" trapezoid or (24) 18" x 26" pans. 5" swivel modulus casters, Delrin bearings. Load capacity 250 lbs. each, temperature -45° to +180°F. 2-Year Parts / 1-Year Labor warranty. Provide the following accessories: _____ . NSF listed.



5925 Heisley Road • Mentor, OH 44060-1833
 Phone: 877/CRESCOR • Fax: 440/350-7267
 www.crescor.com

© Crescent Metal Products, Inc. 2011 All rights reserved.

In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.