



CORRECTIONAL INSULATED HEATED CABINET

Model H-161-FUA-11CM

FEATURES AND BENEFITS:

- 304 stainless steel construction throughout for ease of cleaning. One piece extended base with perimeter bumper to protect the cabinet body.
- Powerful, yet efficient, 1500 Watt heating system maintains the right temperature to properly hold products.
- Internal frame in body and doors maintain structural rigidity.
- Top mounted power unit secured to cabinet body; non-removable.
- Smooth interior coved corners prevent food particles/grease buildup.
- Recessed push/pull handles on both sides prevent damage to walls; allows easy maneuvering.
- 11 ga. stainless steel hinges, butt type, 270° swing; removable with tools.
- Standard with right hand hinging; left hand hinging available upon request.
- Eleven sets of extruded universal angles on 4-1/2" centers accommodate a large variety of pans sizes; rack insert removable with tools.
- Flush mounted heavy-duty paddle latch and 12 ga. stainless steel transport latch, which accepts a padlock.



H-161-FUA-11CM




ANSI/NSF4



C US



5925 Heisley Road • Mentor, OH 44060-1833
877/CRES COR (273-7267) • 440/350-1100
Fax: 440/350-7267 • www.crescor.com

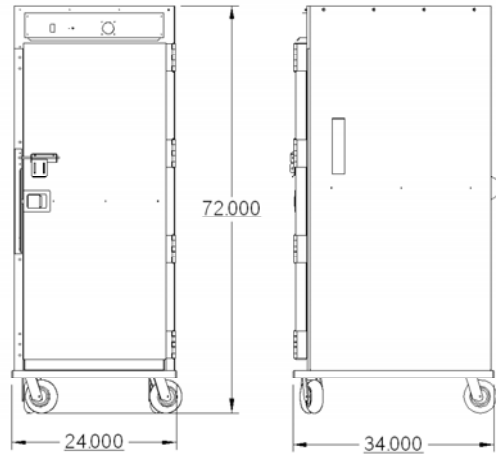

CRES COR MODEL NO.		WIDTH	DEPTH	HEIGHT	INSIDE DIMENSIONS			ACT WEIGHT
					WIDTH	DEPTH	HEIGHT	
H-161-FUA-11CM	IN	31 1/2"	36"	74"	21 3/4"	27"	55 1/2"	521 lb.
	MM	800	914	1880	552	686	1410	236 kg.

ALL CONSTRUCTION IS RIVETED, WELDED AND FINISHED.

CABINET:

- Body: 304 Stainless steel; exterior 18 ga.; interior 20 ga.
- Reinforcement: 14 ga. Stainless steel internal frame.
- Insulation: Fiberglass, 2-1/2" to 4" thick.
- Push handle: 1" x 1" 14 ga. Stainless steel square tube, bolted and welded to internal frame.
- Air tunnels: 20 ga. 304 stainless steel
- Smooth interior coved corners.
- All hardware to be tamper-proof.

BASE:

- One piece construction, .190 aluminum, welded.
- Casters: 6" dia. High modulus tires, 2" wide, load cap. 350 lbs. Each, temp range -40°/+180°F Zerk fittings in hub. Front casters equipped with brakes.
- Gray non-marking rubber perimeter bumper 1 x 1.

DOOR:

- Non-removable; formed 20 ga. 304 stainless steel.
- Hinges (4): 11 ga. Stainless steel with non-removable pins; 270° swing.
- Gasket: Perimeter type, silicone.
- Latch: Flush mounted, heavy duty paddle type.
- Transport Latch: 12 ga. Stainless steel with hasp.

PAN SLIDES:

- 18 ga. Stainless steel angles; riveted to tunnels; removable with tools.
- Holds (11) 18 x 26" bun pans or (22) 12" x 20" pans on 4-1/2" centers.

HOT UNIT:

- Top mounted; non-removable.
- Blowers (2) Thermostat: Mechanical, preset at 180°
- Thermometer: Analog type with 3/8" lexan cover
- Power cord: Permanent; 10 ft., 10/3 ga. with straight plug.
- Internal vent fan
- 1500 Watts, 120 Volts, 60 Hz., single phase, 15 Amp. Service.