

## ROAST-N-HOLD™ PROBE POWER UNIT WITH DIGITAL CONTROLS

### FEATURES AND BENEFITS:

- Probe power unit constantly monitors and controls internal food temperature throughout the cooking and holding stages; delivers perfect results.
- Highly accurate food probe, linked to the easy to use and precise microprocessor digital controls, assure consistent quality.
- Use for rethermalizing of prepared meals or bulk items.
- Probe senses pre-set internal food temperature and automatically switches to holding mode until ready to serve.
- Power unit supplied with a 6" and 1-1/2" probe; adapts to your cooking needs.
- Option to operate without food probe in timer mode; all controlled by the microprocessor.
- Perfect Probe Cooking is this EASY:

- 1) Preheat oven
- 2) Place pans of food or roasts inside
- 3) Set cook and hold temperatures
- 4) Insert probe into food
- 5) Push the Start Button

### POWER UNIT OPTIONS FOR FULL SIZE OVENS

8200 Watts, 208 Volts, 1 Phase, 60 Hz.  
8200 Watts, 240 Volts, 1 Phase, 60 Hz.  
8200 Watts, 208 Volts, 3 Phase, 60 Hz.  
8200 Watts, 240 Volts, 3 Phase, 60 Hz.

### POWER UNIT OPTIONS FOR HALF SIZE OVENS

4700 Watts, 208 Volts, 1 Phase, 60 Hz.  
4700 Watts, 240 Volts, 1 Phase, 60 Hz.  
4700 Watts, 208 Volts, 3 Phase, 60 Hz.  
4700 Watts, 240 Volts, 3 Phase, 60 Hz.

Also available for Cres Cor AquaTemp Series Ovens.



Probe Power Unit




For use with CO-151 and RO-151 Series Oven bodies. Specify probe power unit requirement when ordering.

### ACCESSORIES and OPTIONS (Available at extra cost):

- ☐ Set of Preset Menu Item Switches  
(Up to 10 presets allowed)

## PROBE POWER UNIT

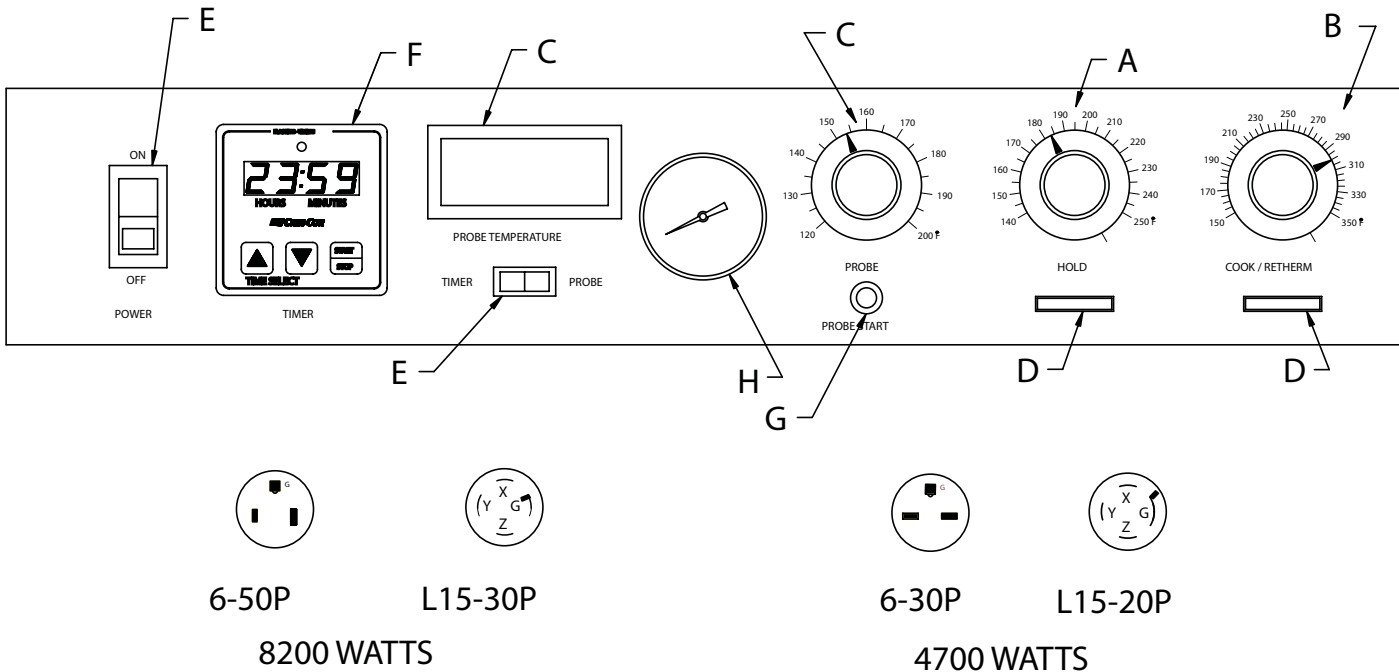

### CONSTRUCTION:

- Body: Formed 20 ga. stainless steel.
- Front control panel: Black, recessed and tilted 7°.
- Assembly is fastened with screws and welded.

### ELECTRICAL COMPONENTS:

- Thermostat (microprocessor):
- Holding up to 250° F. (121° C.)
- Cook/Retherm up to 350° F. (176.5° C.)
- Thermometer
- Power Switch: Lighted ON-OFF rocker type.
- Power Cord: Permanent, 6 ft., 6/3 ga. with right angle plug.
- Fuses (2): 3 Amp.
- Blower Motors (3).
- Vent Fans (2).
- Food Probes (2): 1-1/2" and 6" long, stainless steel.

### POWER REQUIREMENTS AVAILABLE

#### (for full size ovens):

- Heaters (3) 2670 Watts each. Receptacle included.
- 8200 Watts, 208 Volts, 60 Hz., 1 phase, 39 Amps., 50 Amp. service.
- 8200 Watts, 240 Volts, 60 Hz., 1 phase, 34 Amps., 50 Amp. service.
- 8200 Watts, 208 Volts, 60 Hz., 3 phase, 23 Amps., 30 Amp. service.
- 8200 Watts, 240 Volts, 60 Hz., 3 phase, 20 Amps., 30 Amp. service

### POWER REQUIREMENTS AVAILABLE

#### (for half size ovens):

- Heaters (3) 1470 Watts each.
- 4700 Watts, 208 Volts, 60 Hz., 1 phase, 24 Amps., 30 Amp. service.
- 4700 Watts, 240 Volts, 60 Hz., 1 phase, 20 Amps., 30 Amp. service.
- 4700 Watts, 208 Volts, 60 Hz., 3 phase, 13 Amps., 20 Amp. service.
- 4700 Watts, 240 Volts, 60 Hz., 3 phase, 12 Amps., 20 Amp. service.

### SHORT FORM SPECIFICATIONS

Cres Cor Probe Power Unit. 20 ga. stainless steel. Recessed black control panel; digital temperature display. Two stainless steel probes, 1-1/2" and 6" long. Use with CO-151 and RO-151 Series Ovens. \_\_\_\_\_ Watts, \_\_\_\_\_ Volts, 60 Hz., \_\_\_\_\_ Phase. 2 year parts warranty. Provide the following accessories: \_\_\_\_\_ . UL Sanitation, UL, CUL listed.



5925 Heisley Road • Mentor, OH 44060-1833  
Phone: 877/CRESCOR • Fax: 440/350-7267  
www.crescor.com

© Crescent Metal Products, Inc. 2008 All rights reserved.

*In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.*

Litho in U.S.A.