



# ECONOMY SERIES ENCLOSED MOBILE TRAY CARTS

Single Door for 14"x18", 15"x20", 16"x22", 12"x19", 12"x20",  
12"x22", 13"x21" and Room Service Trays


CARTER-HOFFMANN



FOOD SERVICE EQUIPMENT  
ENCLOSED MOBILE TRAY CARTS

# SPECIFICATIONS

Printed in U.S.A. ESD 1213  
Carter-Hoffmann is a trademark  
of Carter-Hoffmann, LLC

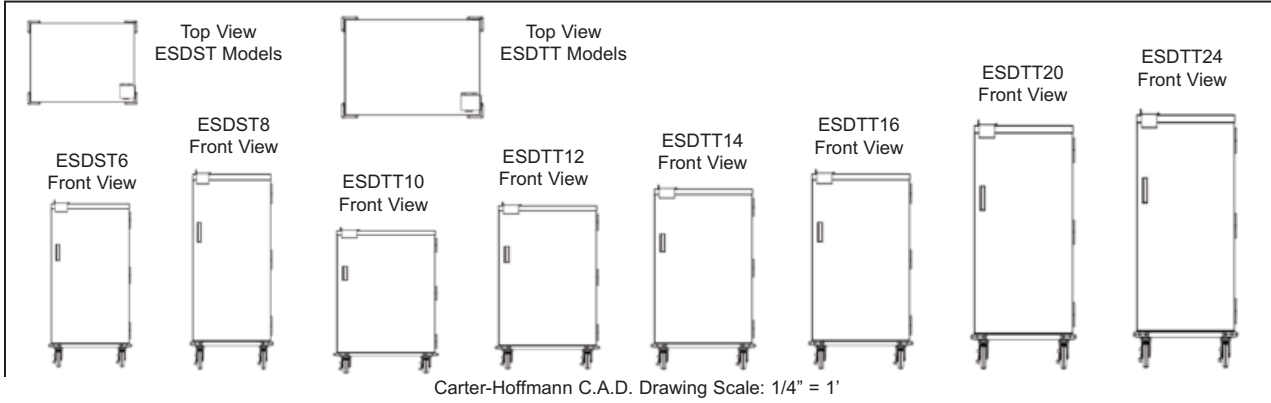

Carter-Hoffmann C.A.D. Drawing Scale: 1/4" = 1'

Model Number	Tray Capacity 5.25" Standard Spacing 1 tray/slide; end-loaded	Inside Working Height		Overall Dimensions						Caster Diameter		Shipping Weight	
				Height		Depth		Width					
				in	mm	in	mm	in	mm				
<input type="checkbox"/> ESDST6	6	34 <sup>1</sup> / <sub>2</sub>	876	42	1067	27 <sup>1</sup> / <sub>8</sub>	708	21 <sup>1</sup> / <sub>8</sub>	536	5	127	150	68
<input type="checkbox"/> ESDST8	8	46	1168	52 <sup>1</sup> / <sub>2</sub>	1334	27 <sup>1</sup> / <sub>8</sub>	708	21 <sup>1</sup> / <sub>8</sub>	536	5	127	205	93

Model Number	Tray Capacity 5.25" Standard Spacing 2 trays/slide; side-loaded	Inside Working Height		Overall Dimensions						Caster Diameter		Shipping Weight	
				Height		Depth		Width					
				in	mm	in	mm	in	mm				
<input type="checkbox"/> ESDTT10	10	28 <sup>3</sup> / <sub>4</sub>	730	36 <sup>3</sup> / <sub>4</sub>	937	37 <sup>1</sup> / <sub>2</sub>	952	27 <sup>1</sup> / <sub>8</sub>	689	5	127	308	140
<input type="checkbox"/> ESDTT12	12	34 <sup>1</sup> / <sub>2</sub>	876	42	1067	37 <sup>1</sup> / <sub>2</sub>	952	27 <sup>1</sup> / <sub>8</sub>	689	5	127	328	149
<input type="checkbox"/> ESDTT14	14	40 <sup>3</sup> / <sub>4</sub>	1022	47 <sup>1</sup> / <sub>4</sub>	1200	37 <sup>1</sup> / <sub>2</sub>	952	27 <sup>1</sup> / <sub>8</sub>	689	5	127	338	153
<input type="checkbox"/> ESDTT16	16	46	1168	52 <sup>1</sup> / <sub>2</sub>	1334	37 <sup>1</sup> / <sub>2</sub>	952	27 <sup>1</sup> / <sub>8</sub>	689	5	127	348	158
<input type="checkbox"/> ESDTT20	20	51 <sup>1</sup> / <sub>4</sub>	1302	63	1600	37 <sup>1</sup> / <sub>2</sub>	952	27 <sup>1</sup> / <sub>8</sub>	689	5	127	368	167
<input type="checkbox"/> ESDTT24	24	56 <sup>1</sup> / <sub>2</sub>	1435	68 <sup>1</sup> / <sub>4</sub>	1734	37 <sup>1</sup> / <sub>2</sub>	952	27 <sup>1</sup> / <sub>8</sub>	689	5	127	388	176

**CONSTRUCTION...** Completely welded cabinet construction. All seams turned in to eliminate raw edges.

**CABINET MATERIAL...** Nickel-bearing type 300 series stainless steel; 18 gauge polished exterior walls.

**BASE FRAME...** 12 gauge stainless steel full depth bolsters with 1" x 1" stainless steel perimeter channel supports.

**CASTERS...** 5" Performa rubber casters. Sealed roller bearing and double ball bearing swivel with Zerk grease fittings. Plate mounted and bolted to base in offset wheel ahead pattern. Two swivel with brakes and two rigid.

**BUMPER...** Soft durometer cushioned corner bumpers, bolted to all 4 corners.

**DOOR...** Double panel welded stainless steel door. Two pin hinges bolted to cabinet; hinged on right. Cavity filled with 1" thick high density fiberglass insulation. Heavy-duty plastic finger grip with magnetic closure. 270 degree door swing with magnet to hold door open when in service. Transport latch.

**HINGES...** Concealed, 12 gauge all stainless steel hinges with 3/8" pin.

**PUSH HANDLE...** 1" diameter tubular stainless steel handle mounted is on the swivel end; extends the full depth of the cabinet.

**TRAY RACK ASSEMBLIES...** Adjustable pin positions; assemblies are removable without tools and constructed of 18 gauge stainless steel. Tray slides with standard spacing on 5.25" centers. Adjustable at 1.75" increments.

- ACCESSORIES/OPTIONS...**
- Pass-through
  - Floor drain with plug and tether
  - 3- or 4-sided top rail
  - Alternate caster sizes and types
  - 2 or 3 thermal airpots with rack
  - Mini-Dome chillable condiment bin
  - Condiment organizer
  - Menu card holder (specify 8.5"x11" or 5"x7")
  - Dry erase board
  - Anti-slip mat for top of cart

Specifications subject to change through product improvement & innovation.

## CARTER-HOFFMANN

1551 McCormick Ave., Mundelein, IL 60060  
(847) 362-5500 • (800) 323-9793 • Fax (847) 367-8981  
[www.carter-hoffmann.com](http://www.carter-hoffmann.com)



# FEATURES & BENEFITS

1551 McCormick Avenue, Mundelein, Illinois 60060  
Tel. (847)362-5500 • (800)323-9793 • Fax (847)367-8981  
[www.carter-hoffmann.com](http://www.carter-hoffmann.com)



**TRAY RACKS...** with adjustable pin positions to accommodate a variety of tray sizes. Tray spacing is adjustable on 1.75" centers. Standard spacing is 5.25".



## ECONOMY SERIES ENCLOSED MOBILE TRAY CARTS

*Since 1947, Foodservice Equipment That Delivers!*



**ESDTT16**  
(shown without transport latch)

**ALL STAINLESS STEEL CONSTRUCTION...** corrosion-resistant 300 series stainless steel; easy to clean and structurally sound for long life. 1" stainless steel full length tubular push handle mounted to end of cabinet.

**DOUBLE PANEL DOOR...** Insulated, flush mounted door with finger grip and stainless steel hinges. 270 degree door swing with magnetic closure and door-open feature. Transport latch for secure closure.

**STAINLESS STEEL HINGES...** Heavy-duty, 12 gauge hinges with 3/8" diameter pin for trouble-free door operation. 270 degree door swing.

**HEAVY-DUTY PERFORMA CASTERS...** 5" diameter industrial grade casters with non-marking red rubber cushioned tread. Rust resistant Delrin bearings with all axles and raceways equipped with Zerk grease fittings. Long lasting and easy rolling, yet durable enough to withstand rigorous cart wash programs. Two fixed and two swivel casters with brakes for easy maneuvering.

**WHEEL-AHEAD CASTER CONFIGURATION...** Mounted to base in offset wheel-ahead pattern for easy rolling over uneven surfaces. Allow for easy handling and steering.

**CORNER BUMPERS...** Soft durometer cushioned bumpers. Protect cart and contents from impacts; protects doorways and walls from damage.

