




HBR14 & HBR28 HUMIDIFIED BULK RETHERMALIZATION CABINETS

For Uncovered Bulk Foods

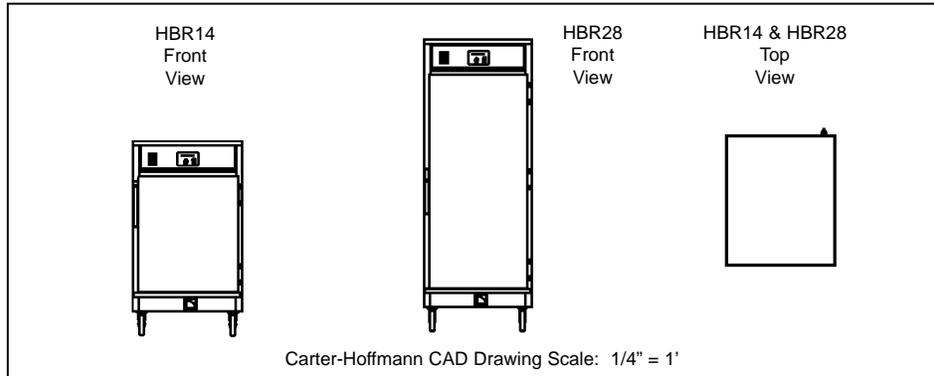

Model Number	Pan/Tray Capacity		Spacing		Inside Working Height		Overall Dimensions						Caster Diameter		Shipping Weight	
	12"x20"	18"x26"	in	mm	in	mm	Height	Depth	Width	in	mm	in	mm	in	mm	lbs
<input type="checkbox"/> HBR14	14	7	3 1/2	89	27	686	48 3/4	1238	34 1/4	870	27 1/4	692	5	127	375	170
<input type="checkbox"/> HBR28	28	14	3 1/2	89	51 1/2	1308	73 1/4	1861	34 1/4	870	27 1/4	692	5	127	450	204

* Tray slides adjustable on 1 3/4" centers.

CONSTRUCTION... Completely welded cabinet construction with outer cabinet welded to base. All seams turned in to eliminate raw edges.

CABINET MATERIAL... All stainless steel construction; 20 gauge polished exterior and 20 gauge interior with 16 gauge water reservoir.

BASE FRAME... 12 gauge stainless steel full depth caster bolsters with 12 gauge stainless steel perimeter supports welded to bolsters.

CASTERS... 5" diameter casters with rubber tread. Four swivel casters. Two casters fitted with brakes.

INSULATION... 2" thick high density continuous wrap-around type fiberglass insulation.

DOOR... Welded double panel stainless steel door; 20 gauge polished exterior and 20 gauge interior. Filled with 2" thick high density fiberglass insulation. Field reversible. Menu card holder with laminated menu card.

HINGES... 12 gauge heavy-duty stainless steel hinges with 3/8" pins; bolted to cabinet and door.

GASKET... High temperature silicone gasket with pressure relief gap mounted to door.

HANDLES... Two recessed pull grips on sides of cabinet.

LATCH... Heavy duty edge mount latch with magnetic catch.

DRIP TROUGH... Stainless steel condensation drip trough welded below door. Drain valve with front mounted handle.

TRAY RACK ASSEMBLY... Removable 18 gauge stainless steel ducts. Removable 16 gauge stainless steel universal slides, fully adjustable at 1 3/4" spacing. Standard spacing at 3 1/2" centers.

CONTROLLER... Solid state electronic controller with digital display and ten-button touch pad. Factory preset for 10 rethermalization and hold modes. Field programmable.

HEAT & HUMIDITY SYSTEM... Top mounted heater with two 2000 watt coiled inconel-sheathed heating elements. High impedance protected, internally cooled fan motor. Dual cooling fans. Precision engineered interior heat duct system. Manual fill water bath with 2000 watt heating element. Extra large surface area to quickly recover humidity level.

ELECTRICAL CHARACTERISTICS... Operates on 208 volts, 60 cycle, single phase, 6000 watts, 28.8 amps. Ten foot rubber cord with 3 prong grounding plug. NEMA L6-30P.

PERFORMANCE... Capable of heating to 195° F (91° C). Preheat to 225° F (107° C) in approximately 20 minutes. 95% maximum relative humidity.

Specifications subject to change through product improvement & innovation.



CARTER-HOFFMANN

1551 McCormick Ave., Mundelein, IL 60060
(847) 362-5500 • (800) 323-9793 • Fax (847) 367-8981

FEATURES & BENEFITS

HBR14 & HBR28 HUMIDIFIED BULK RETHERMALIZATION CABINETS For Uncovered Bulk Foods

PRECISION ENGINEERED HEAT DUCT SYSTEM... Stainless steel heat duct provides even and efficient heating throughout the entire cabinet for safe and consistent results. Ducts removable without tools for easy cleaning.


LARGE WATER RESERVOIR... Larger surface area allows for quick establishment of humidity level. Large capacity extends time between water refills.

EASY ACCESS FRONT DRAIN VALVE... makes water reservoir draining quick and simple.



VERSATILE RETHERMALIZATION CAPABILITY... Uses the power of steam to rethermalize a variety of bulk uncovered and covered food from chilled to serving temperature... most in a hour or less.

EASY GRIP DOOR HANDLE WITH MAGNETIC CATCH... Ergonomically designed for easy opening. Keeps door positively closed for optimal cabinet performance.

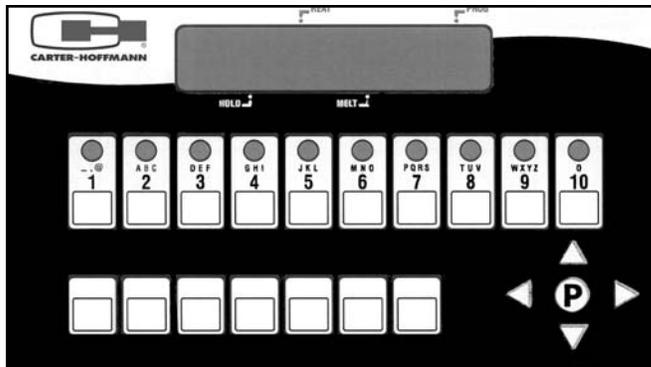

OPERATOR FRIENDLY SOLID STATE CONTROLLER... Easy to use ten button touchpad controls. Preprogrammed rethermalization and hold cycles eliminate the guess work. Field programmable.

1551 McCormick Avenue, Mundelein, Illinois 60060
Tel. (847)362-5500 • (800)323-9793 • Fax (847)367-8981
www.carter-hoffmann.com

