



# PHW1822

## HEATED & HUMIDIFIED TRANSPORT CART

### Heavy-Duty Correctional Features for 18" x 26" Sheet Pans


CARTER-HOFFMANN

**311**

FOOD SERVICE EQUIPMENT  
HEATED TRANSPORT CARTS

# SPECIFICATIONS

Printed in U.S.A. F40 0611  
Carter-Hoffmann is a trademark  
of Carter-Hoffmann LLC

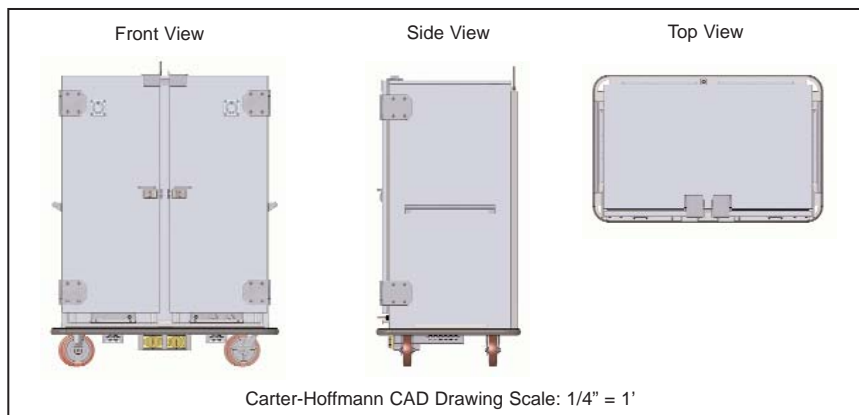

Model Number	Tray/Pan Capacity*		Slide Pairs  Standard	Inside Working Height		Overall Dimensions						Caster		Shipping	
	Heated	Htd/Humid		in	mm	Height		Depth		Width		Diameter		Weight	
						in	mm	in	mm	in	mm	in	mm	lbs	kgs
PHW1822	11	11	22	55	1832	72 <sup>1</sup> / <sub>8</sub>	908	35 <sup>3</sup> / <sub>4</sub>	965	55 <sup>3</sup> / <sub>4</sub>	1416	8	203	598	271

\* Capacity shown at 5" fixed spacing.

**CONSTRUCTION...** Completely welded cabinet construction and top corners, with outer cabinet formed to base and welded. Welded in-place center mullion. All seams turned in to eliminate raw edges. Tamper-resistant fasteners. Completely covered cabinet bottom with no open crevices or holes. Insulated stainless steel divider between each section.

**CABINET MATERIAL...** All stainless steel construction with polished exterior.

**BASE FRAME...** 12 gauge stainless steel full depth bolsters with 1"x1" 14 gauge stainless steel perimeter tube supports welded to bolsters.

**CASTERS...** 8" diameter, polyurethane caster. Two rigid and two swivel with brakes. Plated mounted and bolted to base in offset wheel-ahead pattern.

**BUMPER...** Non-marking gray vinyl bumper set in heavy-duty 3/16" thick extruded aluminum frame with reinforced corner cutouts; reinforced with welded and bolted on stainless steel angle brackets.

**INSULATION...** High density fiberglass, full 1" thick continuous wrap-around type fiberglass insulation.

**DOORS...** Double panel stainless steel; with polished exterior. Filled with 1" thick high density fiberglass insulation.

**HINGES...** Heavy gauge stainless steel strap hinges with 3/8" diameter stainless steel rod pins, fully welded to cabinet.

**LATCHES...** Flush mounted heavy-duty slide latches for positive closing of door. Two top-mounted transport latches with padlock provision.

**HANDLES...** Two 1" diameter stainless steel tubular handles, horizontally mounted and welded to cabinet.

**TRAY RACK ASSEMBLIES...** Tray rack assemblies with tamper-resistant security hold down device; removable with tools. Slides welded in place; fixed spacing at 5".

**THERMOMETER...** Two dial types with remote sensing bulb. Set flush with control panel. Protective Lexan covers.

**HEATING SYSTEM...** Bottom mounted removable heating systems; one for each side of the cabinet. Right side features blower heat and left side features blower heat with humidity pan. Power cords connect to junction box, where power is combined into single cord. Rear mounted raceway with cord exit at top rear of cabinet. Each heating system contains inconel-sheathed heating element. High impedance protected, internally cooled fan motor. Manual reset high-limit switch to protect all internal components. Heater security hold-downs require tools to remove heater.

**ELECTRICAL CHARACTERISTICS...** Operates on 208 volts, 60 cycle, single phase, 3063 watts, 15 amps. Three wire rubber cord with 3 prong grounding plug. NEMA L6-20P plug.

**PERFORMANCE...** Capable of heating to 200° F (94° C). Preheat to 160° F (71° C) in approximately 40 minutes.

#### ACCESSORIES/OPTIONS...

- ☐ Locking door latch
- ☐ Menu card holder

Specifications subject to change through product improvement & innovation.

## CARTER-HOFFMANN

1551 McCormick Ave., Mundelein, IL 60060

(847) 362-5500 • (800) 323-9793 • Fax (847) 367-8981

[www.carter-hoffmann.com](http://www.carter-hoffmann.com)



## PHW1822 HEATED & HUMIDIFIED TRANSPORT CART

*Since 1947, foodservice equipment that delivers!*

### HEAVY-DUTY DOUBLE PANEL DOORS...

Flush mounted design protects door and hinges from damage during transport. Secured in place with heavy-duty, welded on strap hinges.

### FLUSH MOUNTED SLIDING DOOR LATCHES...

Exclusively designed for transport applications. Door remains closed during transport. Flush design protects latch from damage. Top-mounted transport latches with padlock provision for added security.



### HEAVIEST-DUTY COMPLETELY WELDED TURNED-IN SEAM CONSTRUCTION...

Adds rigidity to entire cabinet and eliminates raw edges for easy cleaning and safety. Features welded-on transport latches and hinges, and tamper-resistant fasteners. Insulated center divider is welded in place to separated heated and humidified sections.

### NON-MARKING BUMPER SET IN HEAVY-DUTY 3/16" THICK EXTRUDED

**ALUMINUM FRAME...** Protects doorways, walls and cart from damage. Reinforced with heavy-duty stainless steel angle brackets.

### POLYURETHANE TREAD CASTERS WITH SEALED ROLLER BEARING...

Long lasting, easy rolling for maximum load and minimum maintenance. 8" casters offset in wheel-ahead pattern for easy movement over thresholds and uneven surfaces. Two rigid, and two swivel with brakes.

### HEAVY-DUTY STAINLESS STEEL BASE FRAME...

12 gauge caster busters with tubular perimeter frame to withstand heavy loads and harsh transport conditions. Completely covered cabinet bottom eliminates open crevices and holes, discouraging concealment of contraband.



**DUAL ENVIRONMENT HEATING SYSTEM...** Blower heating system for fast heat up, recovery and even heat distribution throughout cabinet. Left side of cabinet features blower heat and right side features humidified blower heat. Each heater can be unplugged from junction box and removed, with tools, for easy cleaning and service. Power is combined in junction box into single power cord supply, mounted inside raceway on rear of cabinet. Exit from top of raceway to plug into overhead electrical receptacles.

